

BIKER^{G3}

CONSTRUCTION MANUAL

4-7
YEARS



Length	104 - 127 cm / 41 - 50 inch
Max weight	31 kg / 69 lbs
Time to build	3,5 hours



World's first real constructible rides



WARNING - IMPORTANT NOTICE TO PARENTS

Before you start constructing and use our product, please carefully read the following safety warning and download our manual from our website. This safety warning and manual contains important information relating to your child's safety. It is your responsibility to review this information with your child and make sure they are fully aware of all the warnings before they start riding. Failure to follow instructions and safety precautions can result in serious injury or death.

You can find a digital copy of the manual at the following web address:

www.infento.com

PLEASE PRINT OUT THE MANUAL AND KEEP
THE MANUAL AND THIS **SAFETY WARNING** IN A
SAFE LOCATION FOR FUTURE REFERENCE.

SAFETY SECTION



WARNING! PARENTAL SUPERVISION AND APPROPRIATE USE

Like any moving product, rides made from Infento parts can be dangerous if due care and attention is not paid. To reduce the risk of serious injury: use only under close adult supervision. Parents must review the following warnings and instructions with each Infento ride that is being built. It is your responsibility to review this information and make sure that all riders understand all warnings, cautions, instructions and safety topics, and assure that young riders are able to safely and responsibly use this product. Infento recommends that you periodically review and reinforce the information in this manual with younger riders, and that you inspect and maintain your child's Infento rides to insure their safety.

WARNING! RIDING ON INFENTO RIDES CAN BE A DANGEROUS ACTIVITY

Riding on Infento rides can be a dangerous activity. Certain conditions may cause the equipment to fail without fault of the manufacturer. Rides made from Infento parts can and are intended to move, and it is therefore possible to lose control, fall off and/or get into dangerous situations that no amount of care, instruction or expertise can eliminate. If such things occur you can be seriously injured or die, even when using safety equipment and other precautions. Ride at your own risk and use common sense.

WARNING! NO LIABILITY FOR CONSTRUCTED RIDES THAT DIFFER FROM OUR MANUALS

The rides that you can find in our manuals have been tested by official independent testing agencies. We will not be responsible or liable, directly or indirectly, in any way for any loss or damage of any kind incurred as a result of your decision to build constructions or rides that differ from the official rides that we show in our manuals.

ASSEMBLY – SUBSECTION

WARNING! OUR KITS CONTAIN SMALL PARTS

This package contains small parts which, before assembly, present a choking hazard to children under the age of three. Care should be taken

during unpacking and assembly to insure that all small parts and plastic bags are accounted for and kept out of the reach of children.

WARNING! TO AVOID SERIOUS INJURY:

1. Toys are to be assembled by an adult using Infento manuals.
2. All fasteners (bolts and nuts) should be fully tightened.
3. It is the responsibility of the adult who assembles this bicycle to properly install all parts included in the factory sealed shipping carton and to make the adjustments to the functional parts such as handle bar and seat and chain when necessary.

USE – SUBSECTION

WARNING! TO AVOID SERIOUS INJURY:



1. Continuous adult supervision is required.
2. Only ride constructed rides that have been built according to the instructions given in the official Infento manual.
3. Never exceed the maximum weight. You can find the maximum weight for every specific ride in our manual.
4. Always check the manual to see the minimum and maximum age as well as the minimum and maximum length for every specific ride.
5. Always wear safety equipment such as a helmet, knee pads and elbow pads. We recommend riders always wear a properly fitted helmet that complies with local or national guidelines or laws. Keep chinstrap of helmet securely buckled.
6. Always wear closed toed shoes (lace-up shoes with rubber soles), never ride barefooted or in sandals, and keep shoe laces tied and out of the way of the wheels.
7. Avoid streets and surfaces with water, sand, gravel, dirt, leaves, and other debris. Wet weather impairs traction, braking and visibility.
8. Excessive exposure to sunlight, temperatures below 0 degrees Celsius, water, sand, gravel, dirt, leaves, and other debris can damage, shrink, expand or weaken parts. Keep your ride in a dry environment with proper heating.
9. Avoid sharp bumps, drainage grates and sudden surface changes. Your Infento ride may suddenly stop.
10. Ride on smooth, paved surfaces away from motor vehicles. Wet, slick or uneven and rough

surfaces may impair traction and contribute to possible accidents.

11. Never risk damaging surfaces, such as carpet or flooring, by use of an Infento ride indoors.
12. Never use near motor vehicles, streets, roadways, alleys, swimming pool areas, hills, steps, sloped driveways, inclines and public highways.
13. Watch out for pedestrians, skaters, skateboards, scooters, bikes, children or animals who may enter your path, and respect the rights and property of others.
14. Avoid excessive speed associated with downhill rides.
15. Do not use at night or in periods with reduced visibility.
16. Before every use, please make sure that the complete ride and all joints have been assembled tightly, as with use, joints may wear out.
17. Before using your Infento ride, please check that the screws are tightened securely.
18. It's your own responsibility if you modify the product other than manufacturer's instructions.
19. Maintain a hold on the handlebars at all times.
20. Brake will get hot from continuous use. Do not touch after braking.
21. Periodically check hardware and tighten if necessary. Replace worn or broken parts immediately.
22. Skill is required to avoid falls or collision causing injury to the user and third parties.
23. Check operation of breaks every time before bicycle is ridden.
24. Check local laws before you start with riding.
25. Never tow wagons, other vehicles, or children on skates or skateboards.
26. Make certain that anyone who uses an Infento ride has been fully instructed in its operation.
27. Instruct your child on how to use the breaks.
28. Do not perform stunts.
29. Never use headphones or a cell phone when riding.
30. Only one rider at a time on an Infento ride.
31. Do not allow children to stand on the product at any time.

FAILURE TO USE COMMON SENSE AND HEED THE ABOVE WARNINGS INCREASES RISK OF SERIOUS INJURY. USE WITH APPROPRIATE CAUTION AND SERIOUS ATTENTION TO SAFE OPERATION.

SAFETY SECTION



OUR KITS CONTAIN SMALL PARTS

This package contains small parts which, before assembly, present a choking hazard to children under the age of three. Care should be taken during unpacking and assembly to insure that all small parts and plastic bags are accounted for and kept out of the reach of children.

QUESTIONS? HELP NEEDED?

You can email us at:
support@infento.com
and our team will assist you as soon as possible.



MAINTENANCE | INSTRUCTION



Inspect the product frequently. Failure to inspect the product and to make repairs or adjustments, as necessary, can result in injury to the rider or to others.

1. Make sure all parts are correctly assembled and adjusted as written in this manual.
2. Oil or grease moving parts periodically. Every 6 month.
3. Check nuts and bolts often and tighten if necessary. Every time you use your ride.
4. Any parts how are missing, showing evidence or wear should be replaced immediately.
5. Follow closely the assembly instructions pertaining to the proper adjustments of parts
6. Periodically check the brake system for proper function. Every time you use your ride.
7. Periodically check the steering mechanism for proper function. Every time you use your ride.
8. Check the air pressure in the tires to be the amount specified in the manual. Every time you use your ride.
9. Periodically check the bicycle's tooth belt to be sure that it is not too lose which could allow the chain to slip off the sprockets.

RECOMMENDED TOOLS



4 x Allen key
3, 4, 5, 6 mm



1 x Tapeline



1 x T-handle
for Allen key



5 x Wrench
10, 13, 14, 15, 19 mm



1

ride **BIKER**

Bolt M8x20
(low head) 1x

+

L-joint 1x

+


T-Positioning block 2x

+


Profile 1x
9.45 inch | 240 mm

First, get all required materials stated here and then follow the instructions.

Tighten bolts with full force (15nm) to prevent them coming loose.

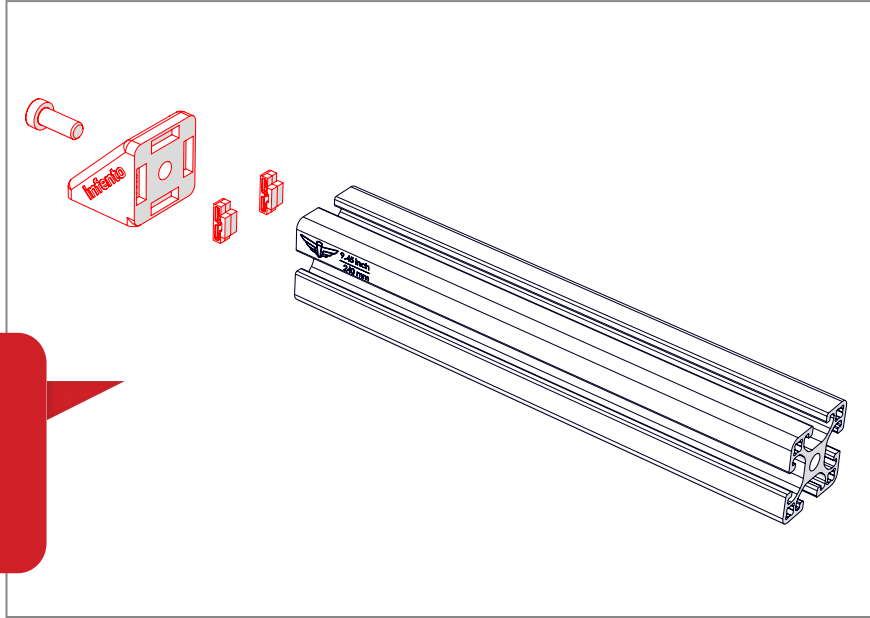

Double check here:
Does your result looks exactly like the image at the bottom of the page?

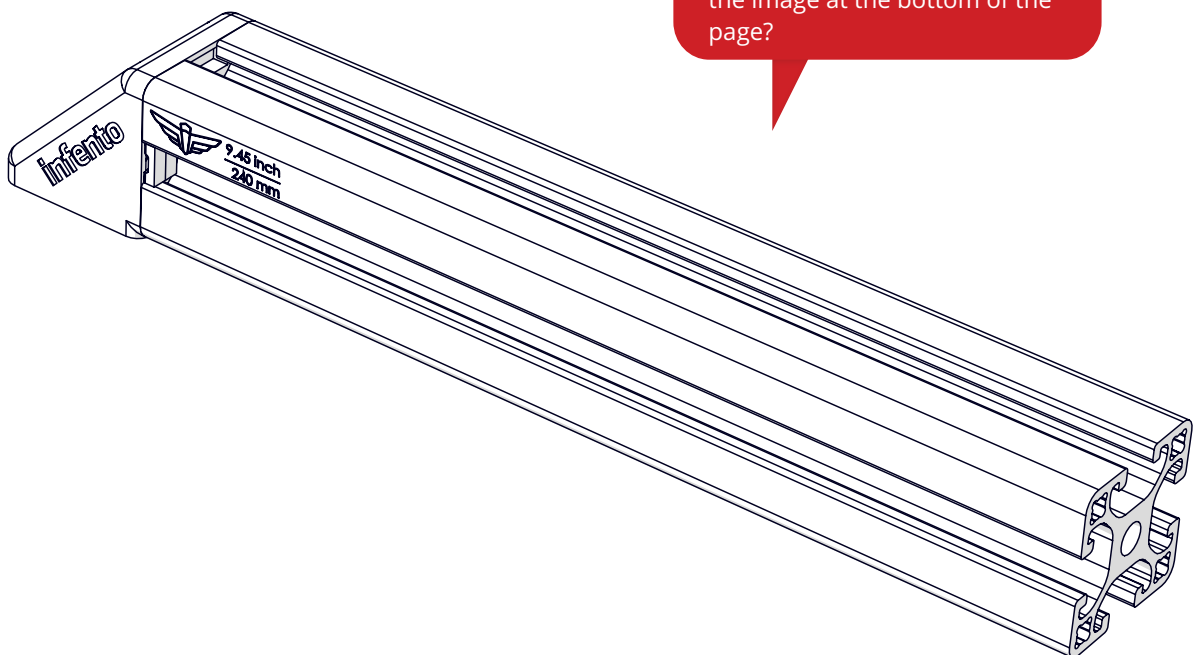


TOP 3 REQUIREMENTS MAKING A GREAT INFENTO EXPERIENCE:



1

Tighten bolts with full force (15Nm) to prevent them from coming loose.

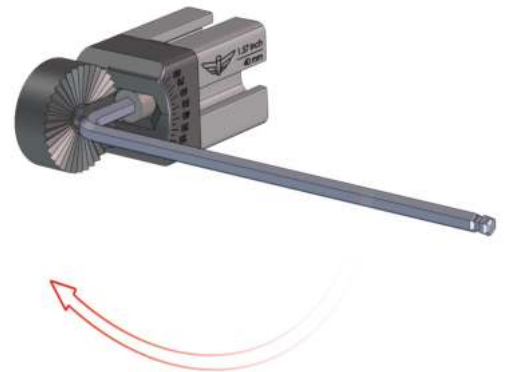

2

Constructing and playing always under supervision of an adult.



3


Check frequently if all parts are still firmly tightened and function properly.





2

ride **BIKER**



T-Positioning block 2x

+





Multi angle joint 1x

+



Bolt M8x20 1x





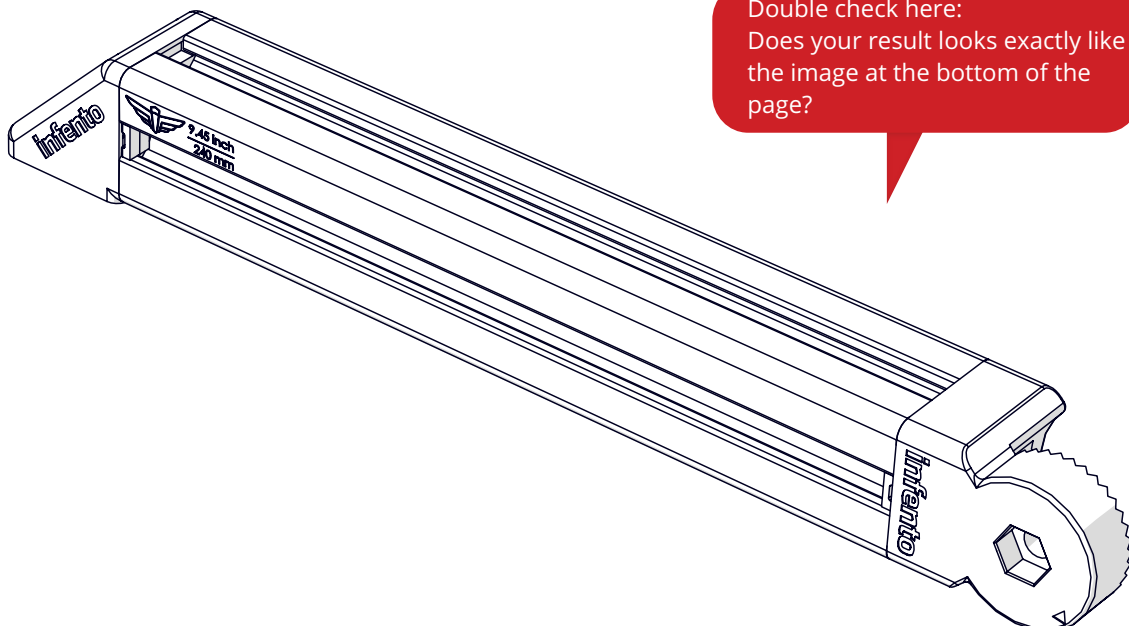
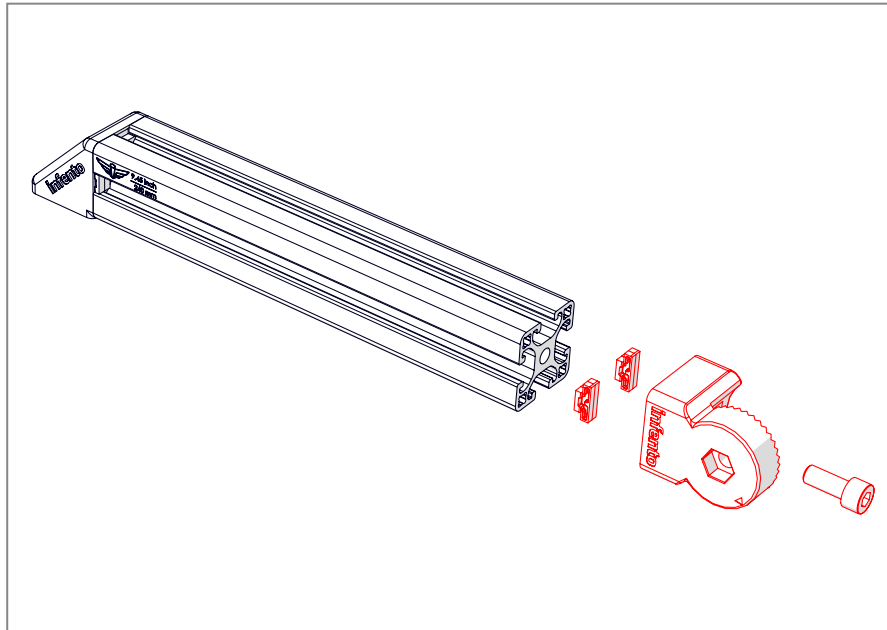


Double check here:
Does your result looks exactly like
the image at the bottom of the
page?



3

ride **BIKER**

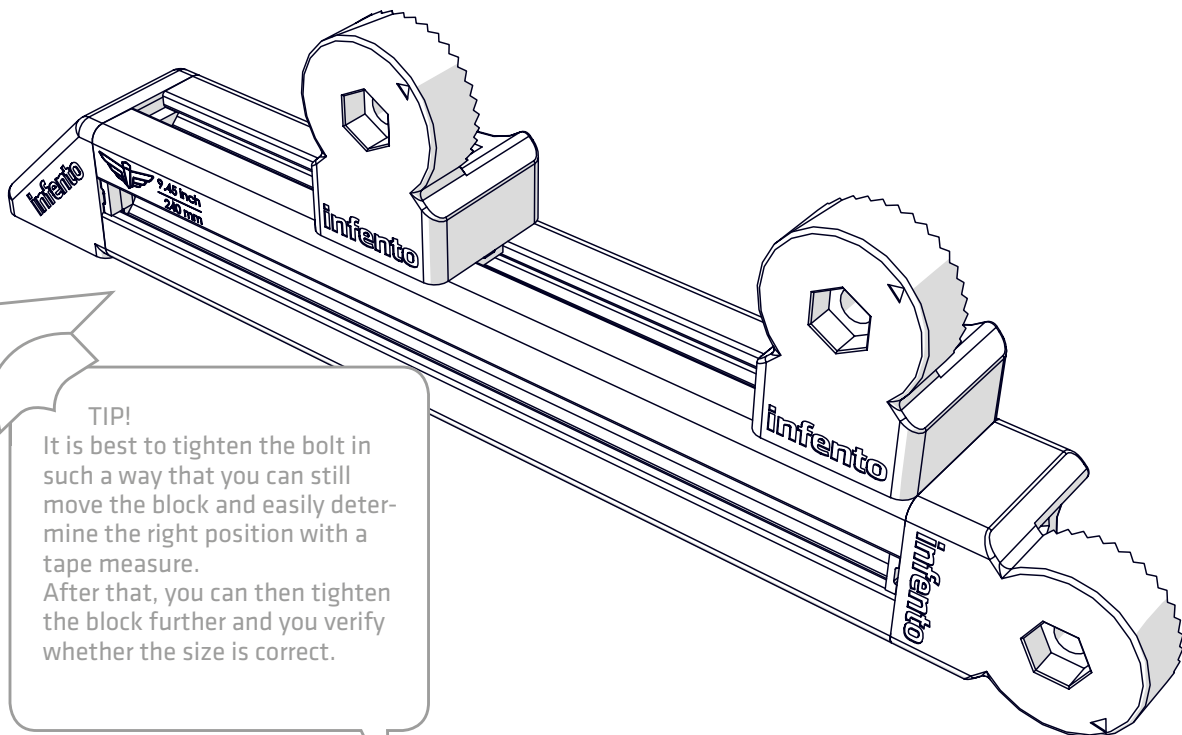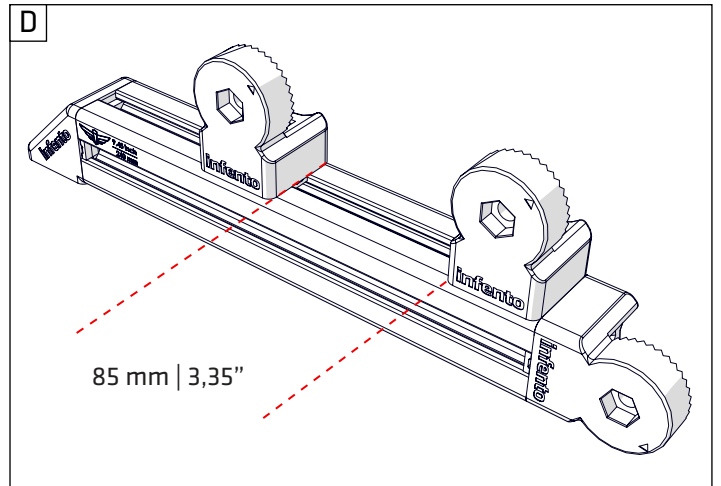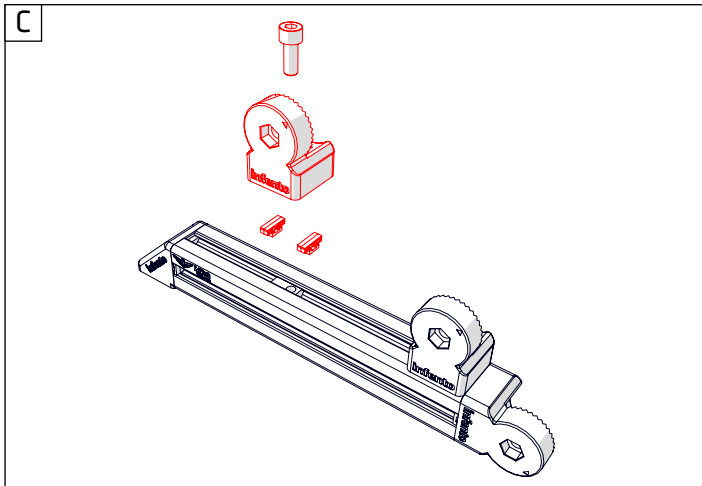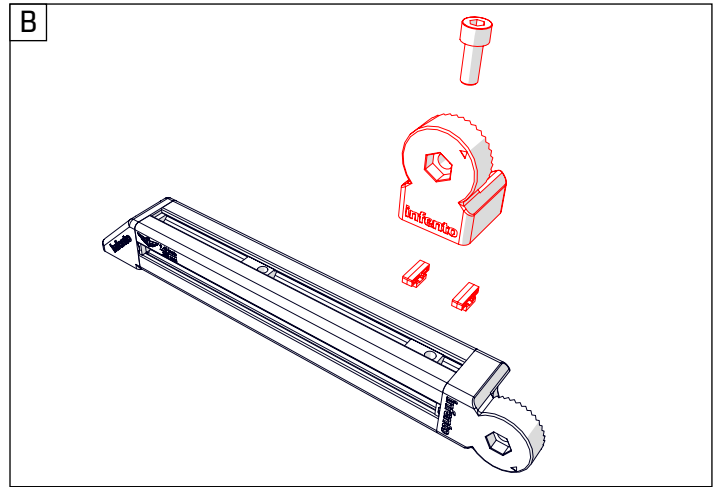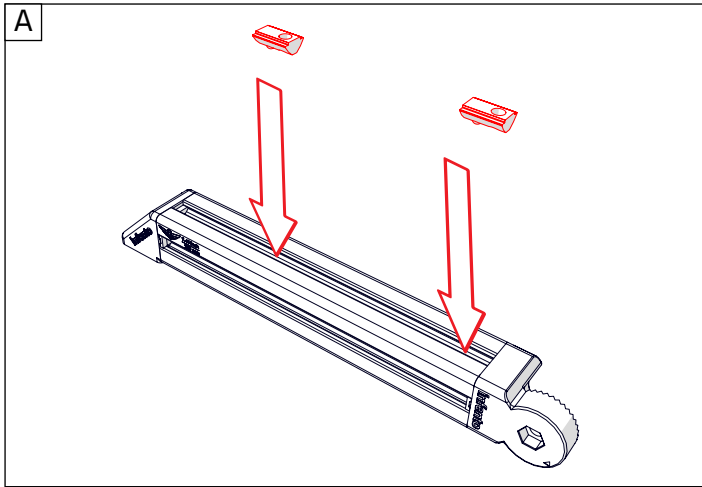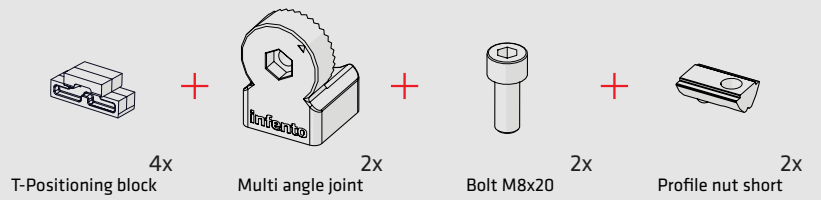





TIP!

It is best to tighten the bolt in such a way that you can still move the block and easily determine the right position with a tape measure. After that, you can then tighten the block further and you verify whether the size is correct.



4

ride **BIKER**


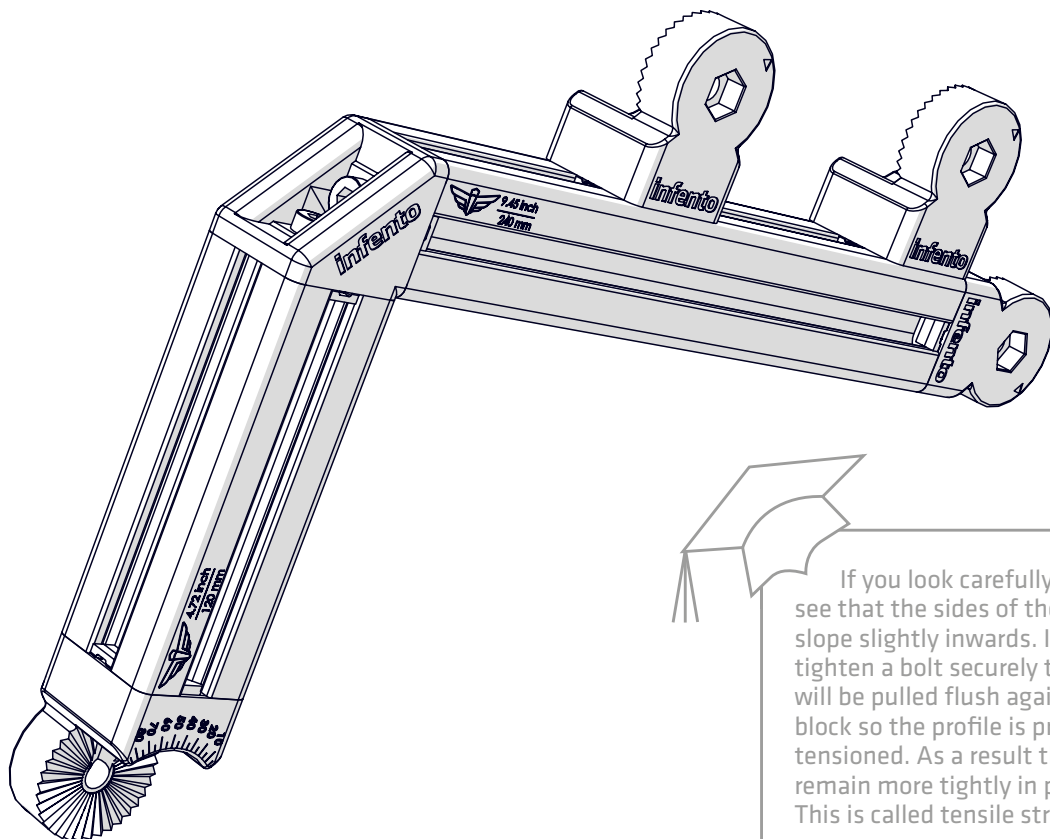
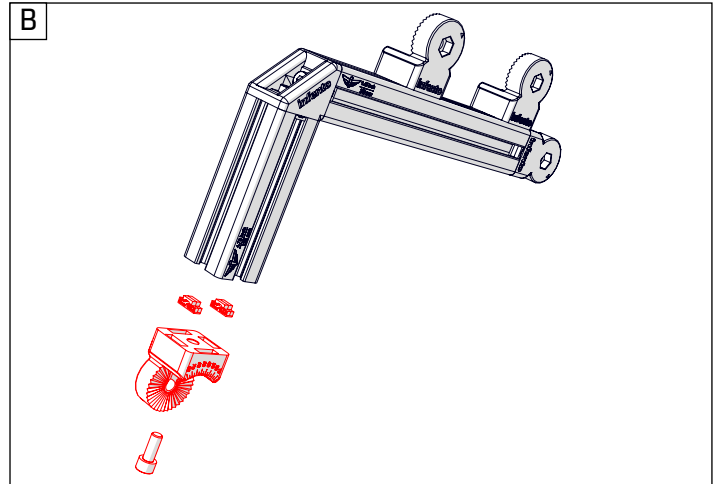
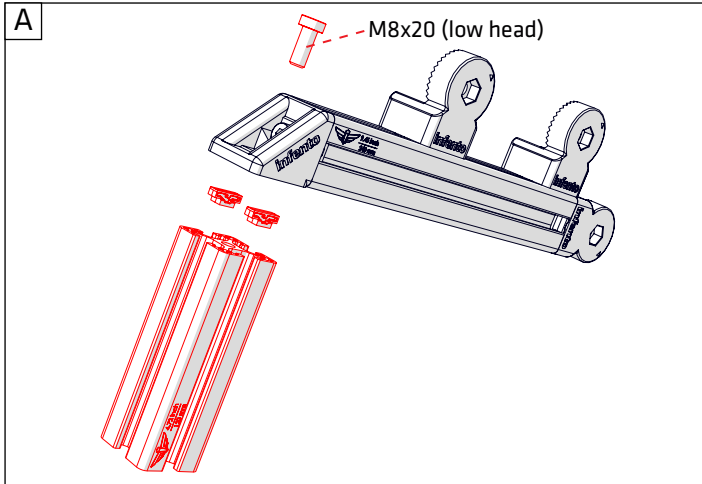
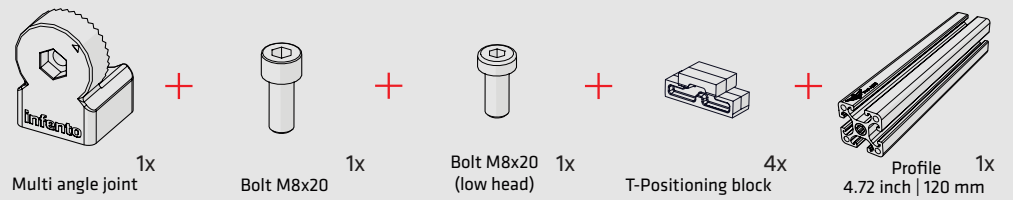


If you look carefully you can see that the sides of the profile slope slightly inwards. If you tighten a bolt securely the profile will be pulled flush against the block so the profile is properly tensioned. As a result the bolts remain more tightly in place. This is called tensile stress.



5





ride **BIKER**

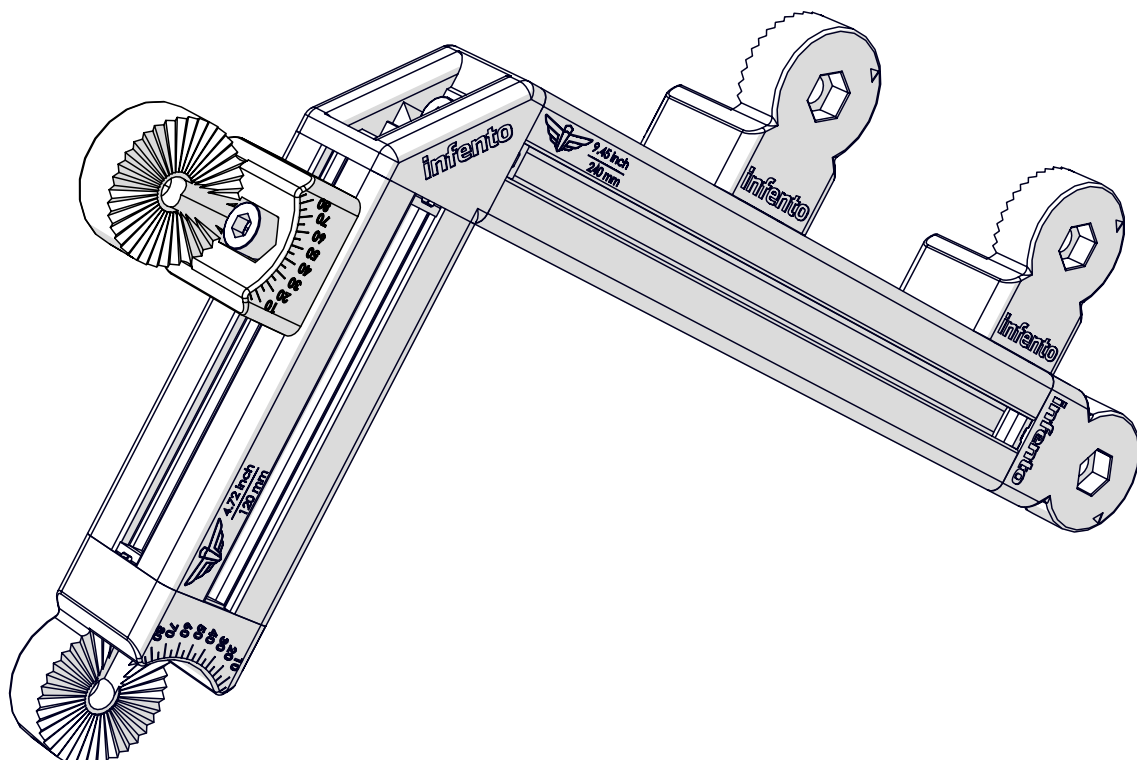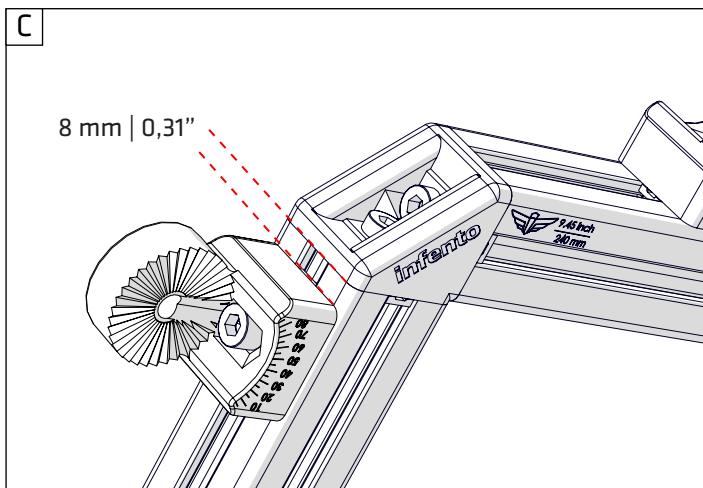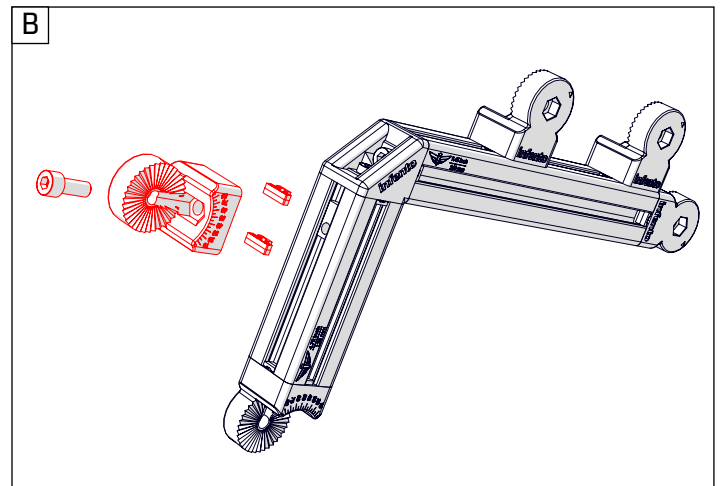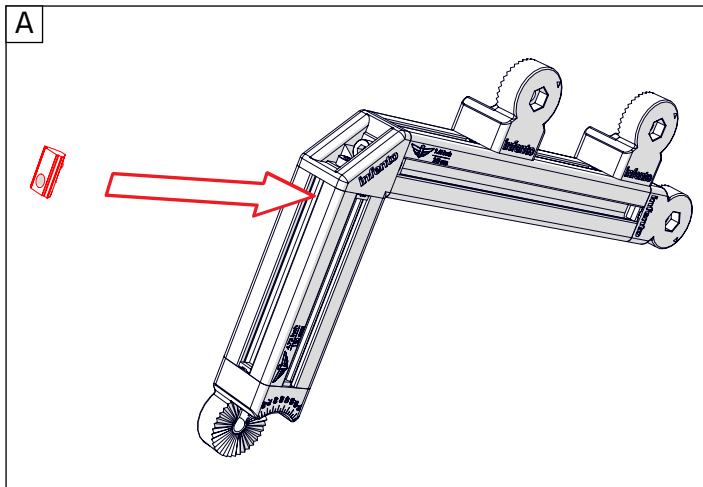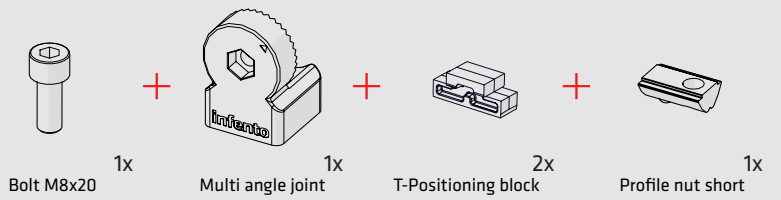




6

ride **BIKER**

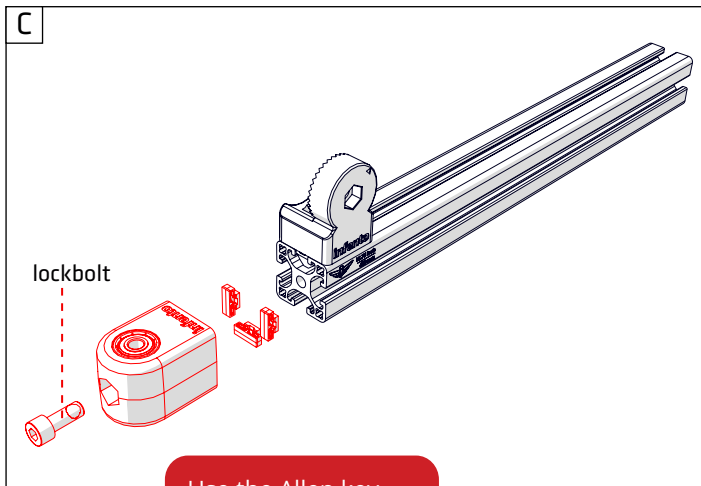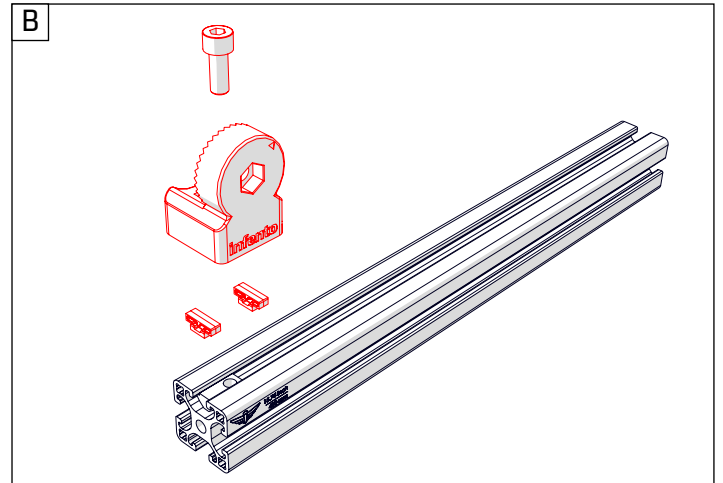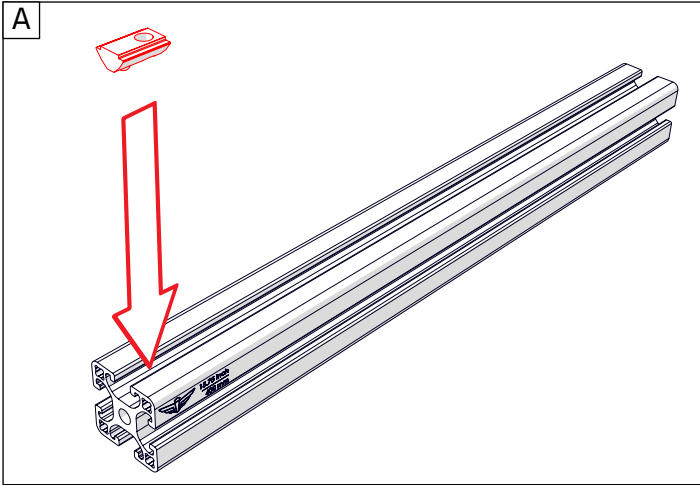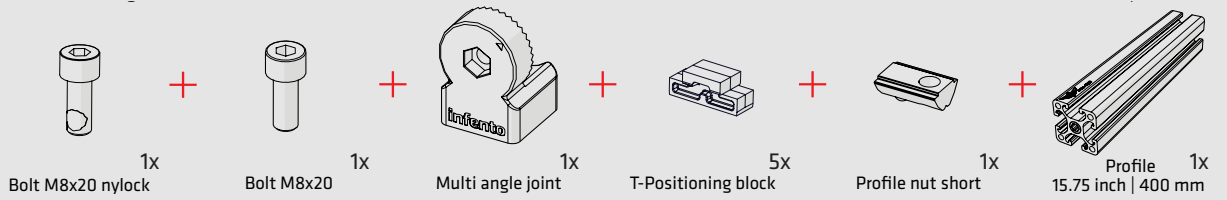

Use the Allen key handle so you can tighten the bolt well.






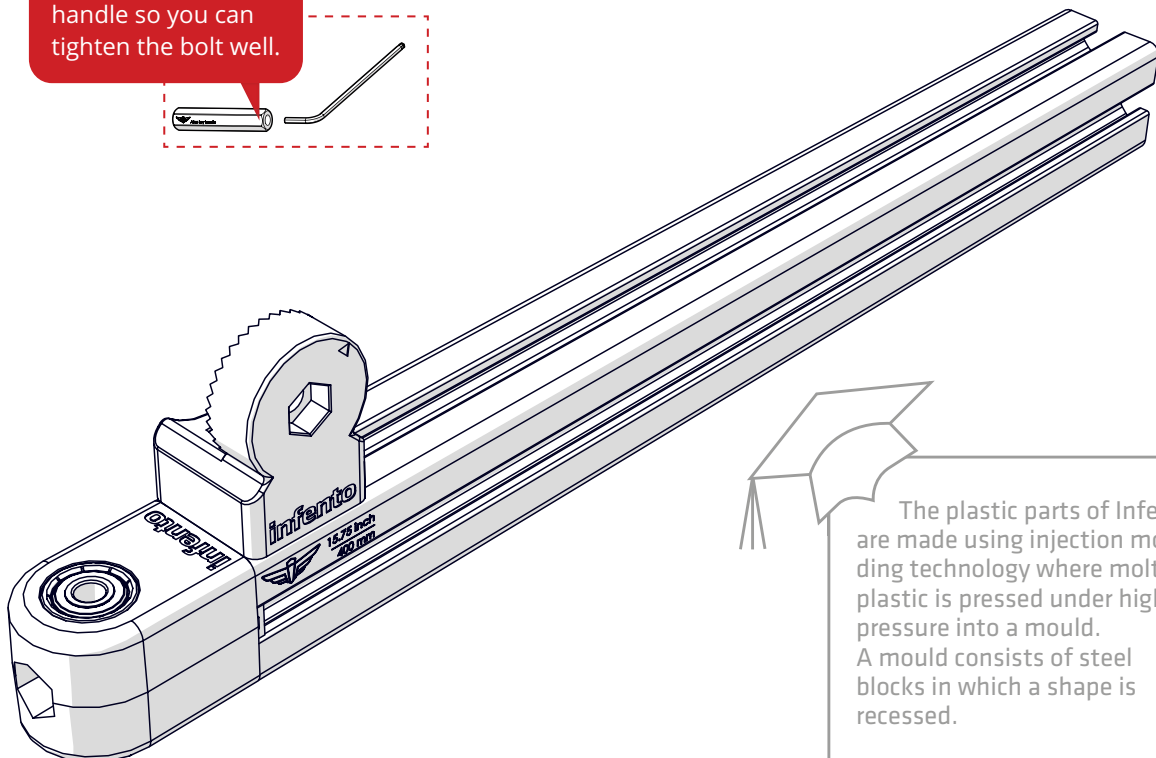


The plastic parts of Infento are made using injection moulding technology where molten plastic is pressed under high pressure into a mould. A mould consists of steel blocks in which a shape is recessed.



7

ride **BIKER**

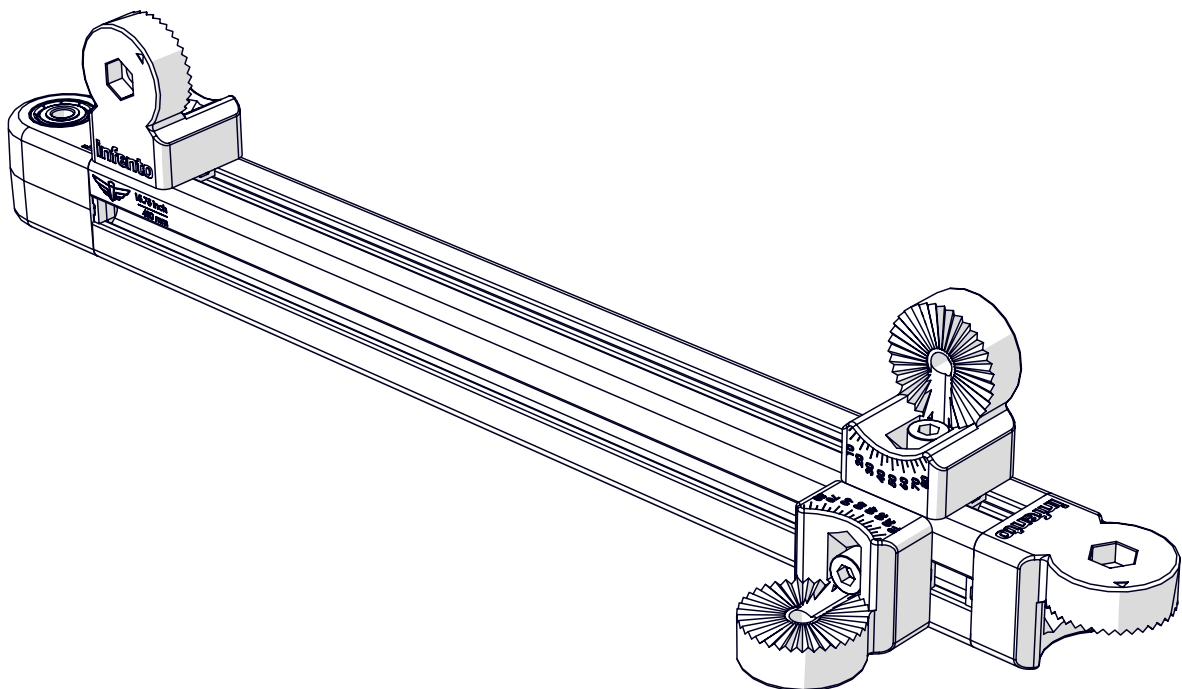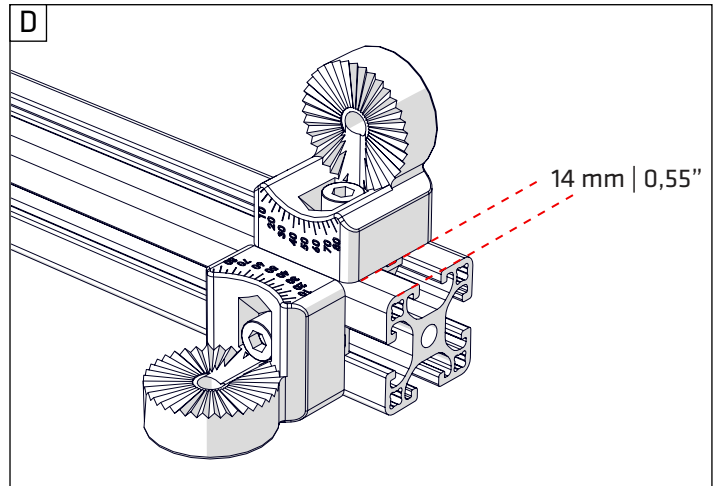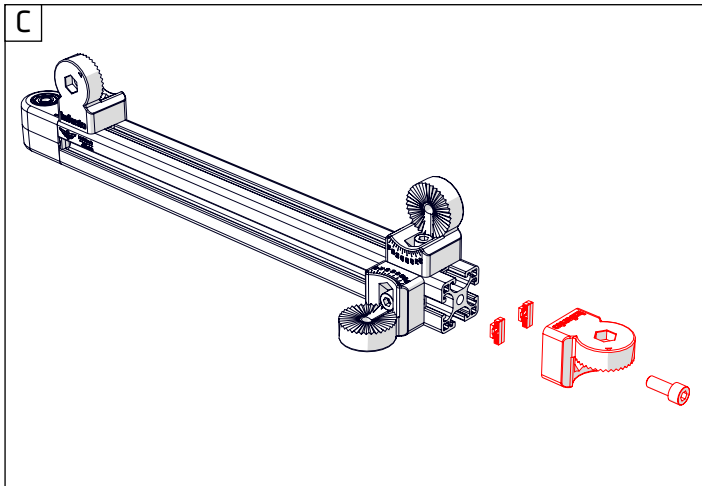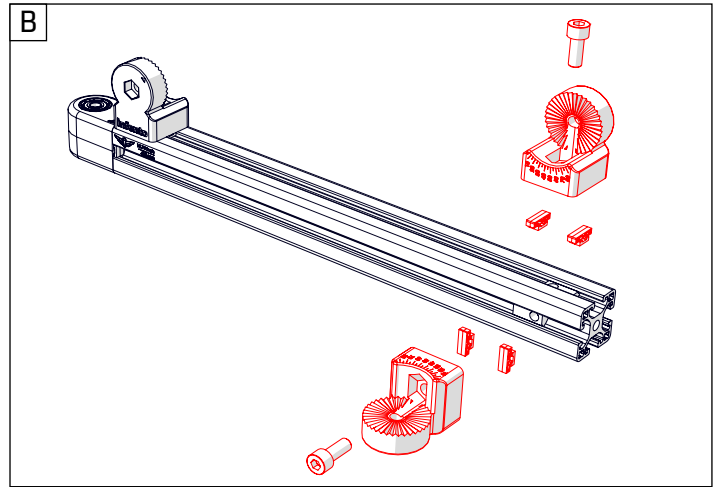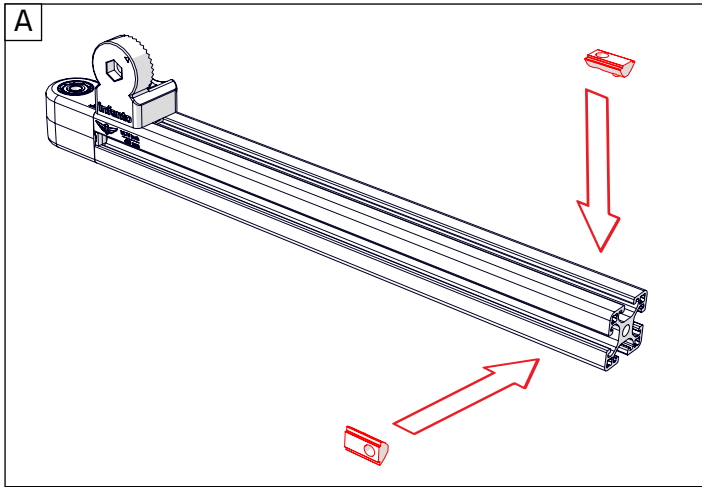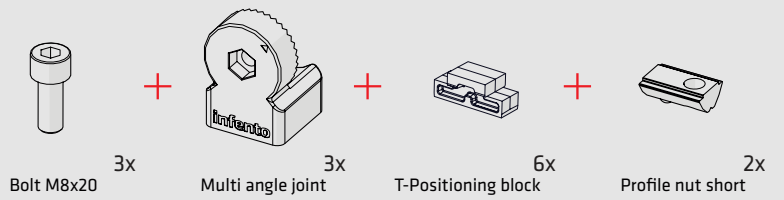



8

ride **BIKER**




2x

Bolt M8x35



2x


Locknut M8




2x

Knurled disc 2 stripes


Depending on your Kit, the knurled discs can be of a different type, looking like this:






There are two types of knurled discs. Please see education section.



A

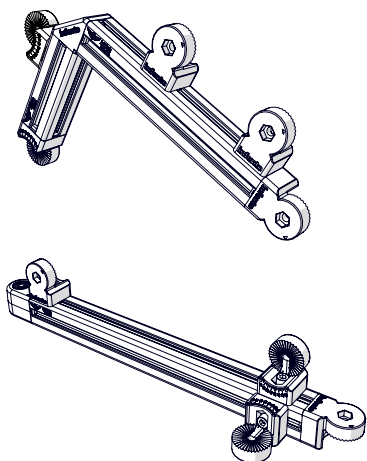

B




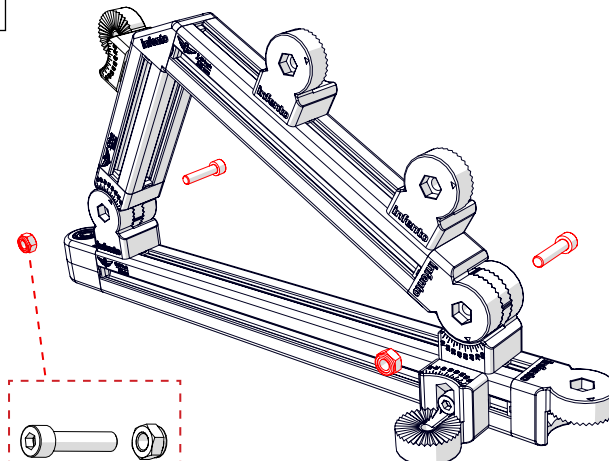


There are two different knurled discs. One for each corner ending in a 5 (5-15-25-etc. degrees), which has one stripe round the outside, and one for each corner that ends in a 0 (0-10-20-etc degrees), which has two stripes round the outside.



9

ride **BIKER**

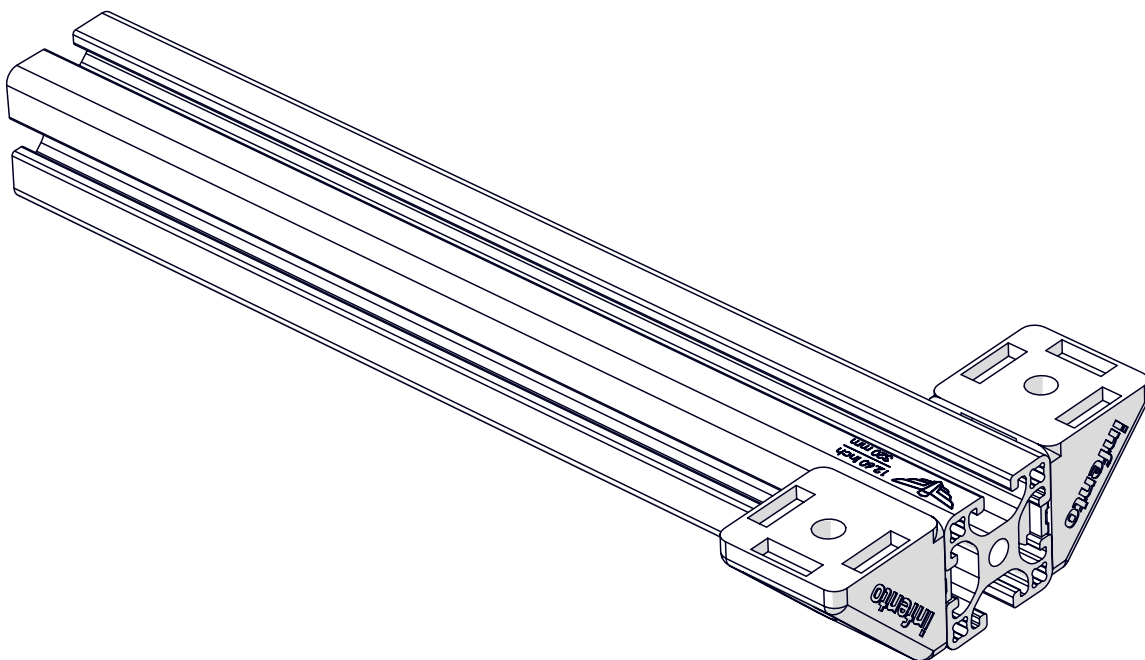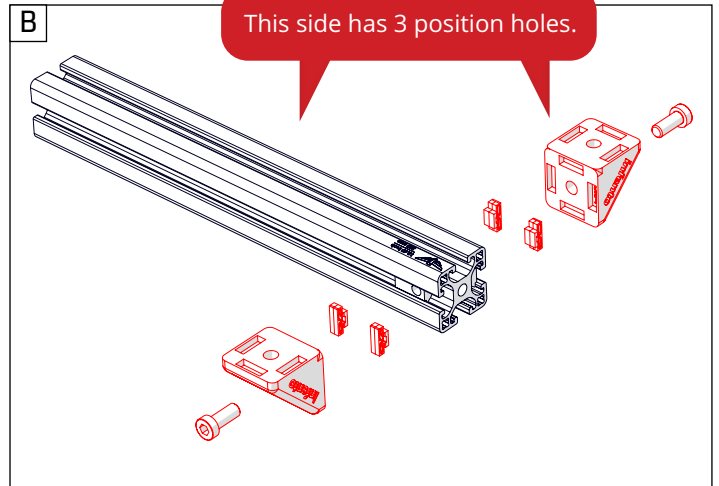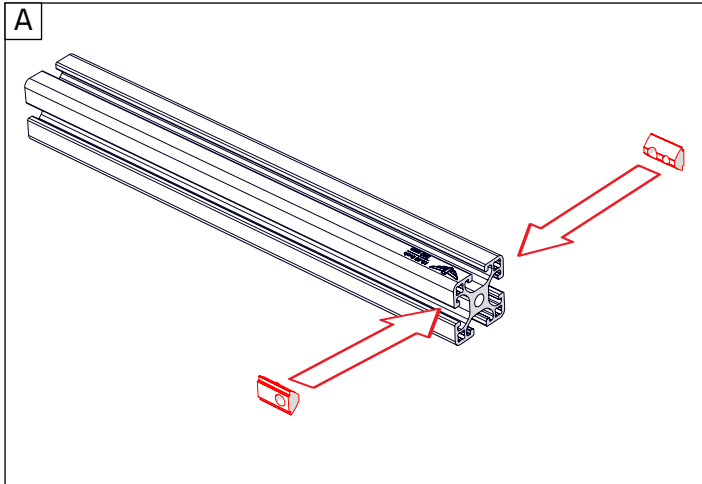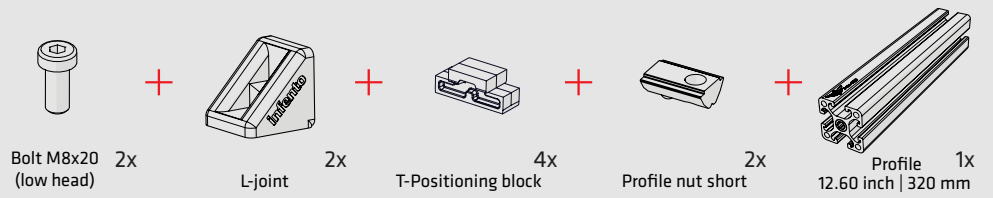



10

ride **BIKER**



Bolt M8x25
(low head)

+



L-joint

2x

+



Positioning block


6x

+




Nut M8

2x

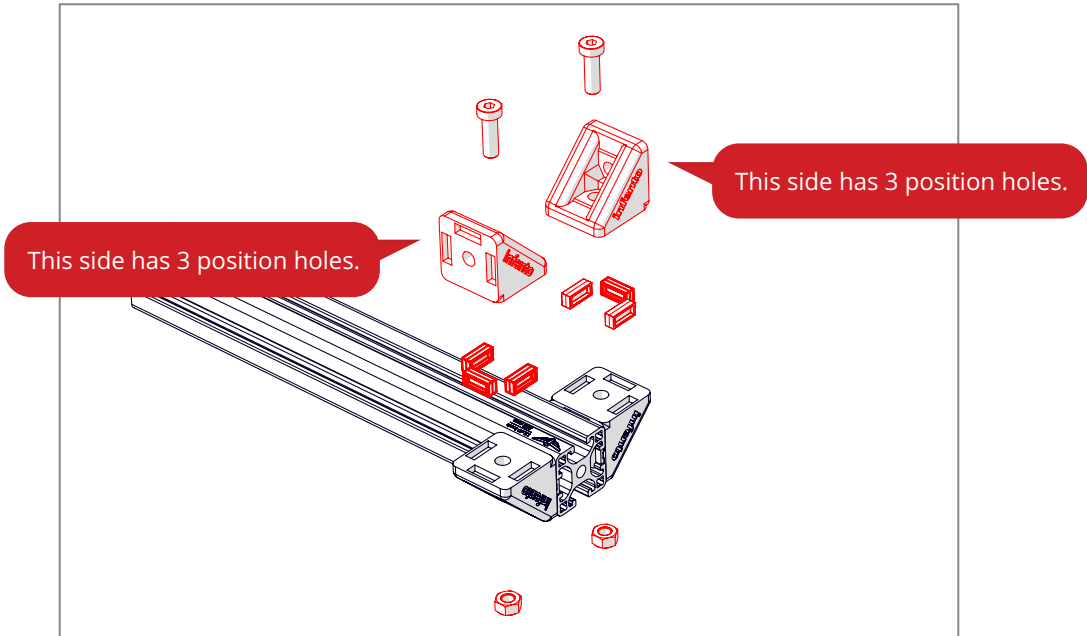

The positioning blocks are some of the smallest Infento parts but they are also some of the most important. They ensure that everything connects to each other properly. This prevents parts from twisting and coming loose when under pressure. Therefore, always use at least two positioning blocks per block.

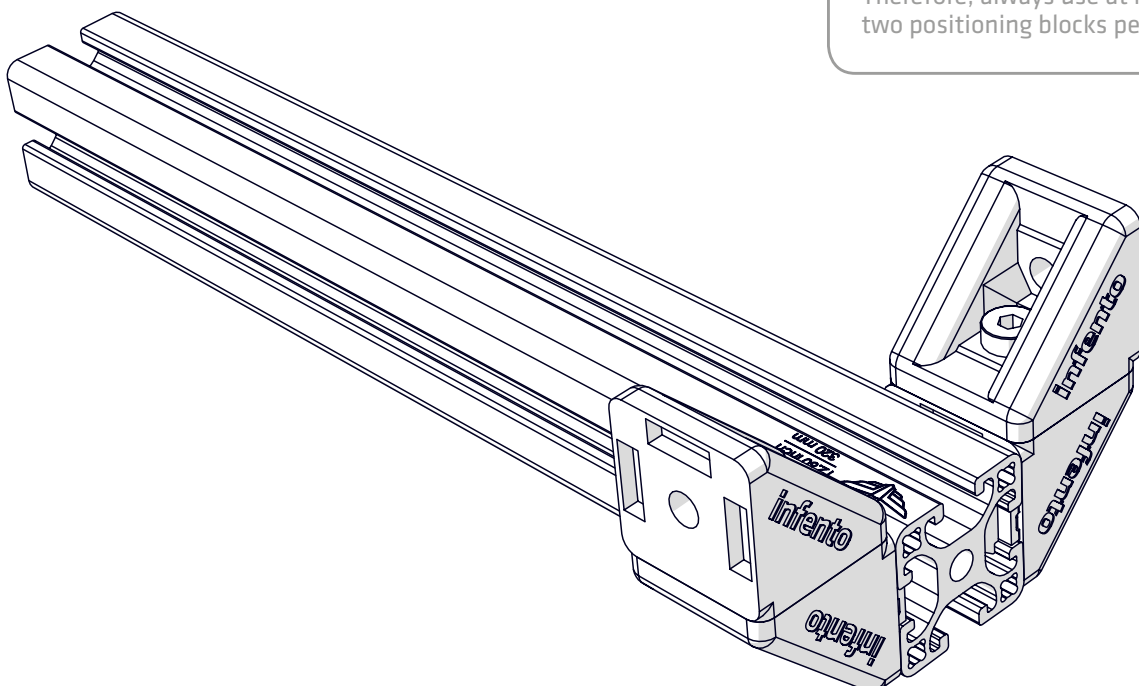



11

ride **BIKER**




Protect cap

1x



Bolt M8x20
(low head)

1x




L-joint

1x




T-Positioning block



2x

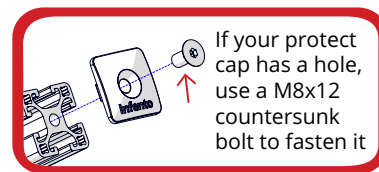

A

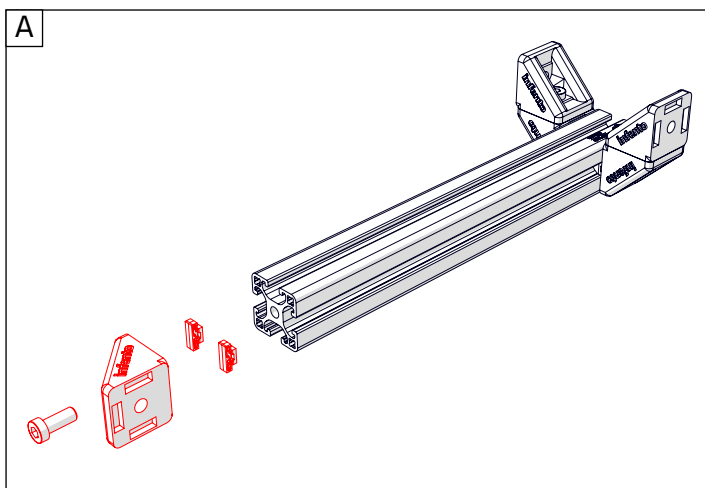

B

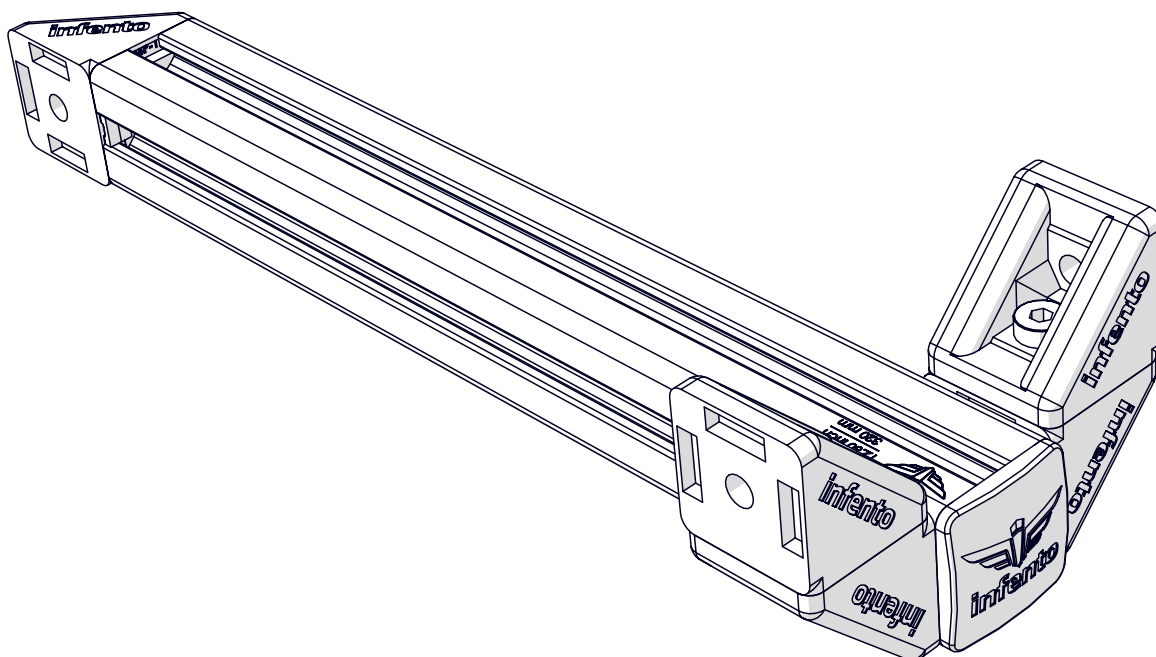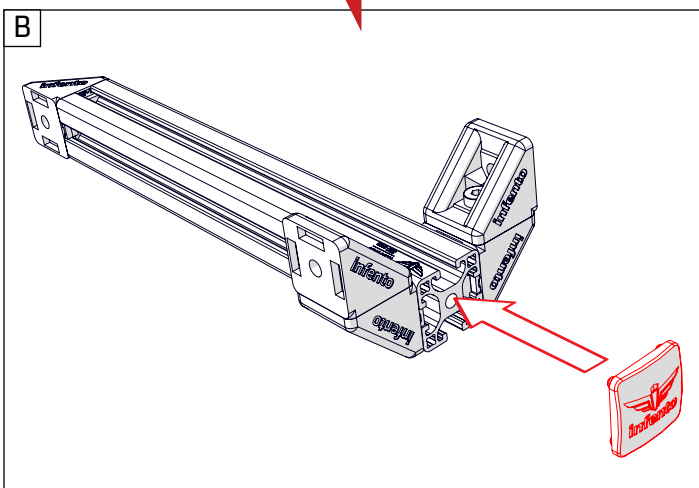




12

ride **BIKER**



If your Kit contains a white fastener bag with 12 Nock Washers, please follow the steps on this page. If not, please skip to the next page of the manual.



2x
Nock washer M8-16

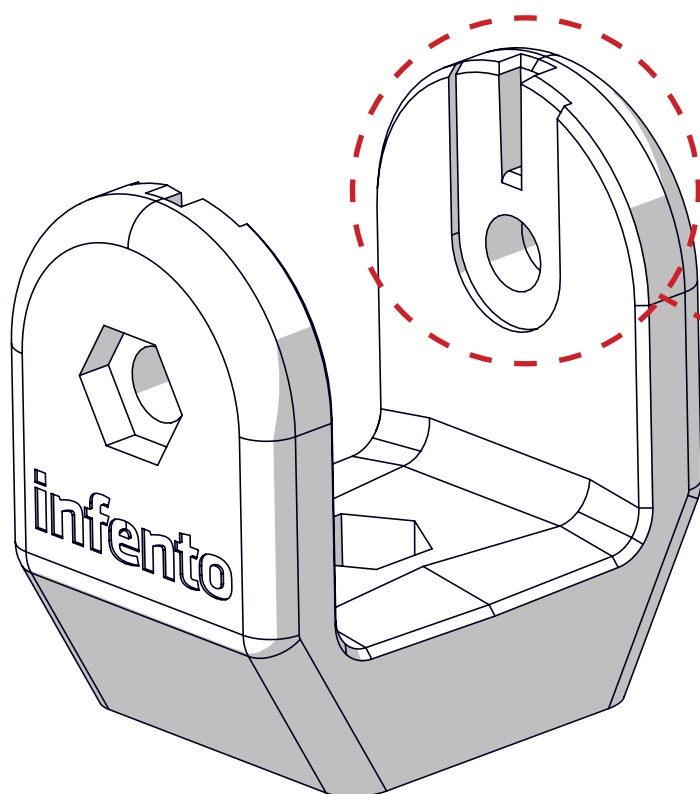




This is the U-block. Before being able to use this part, you need two Nock Washers M8-16. Press these washers into the slots.

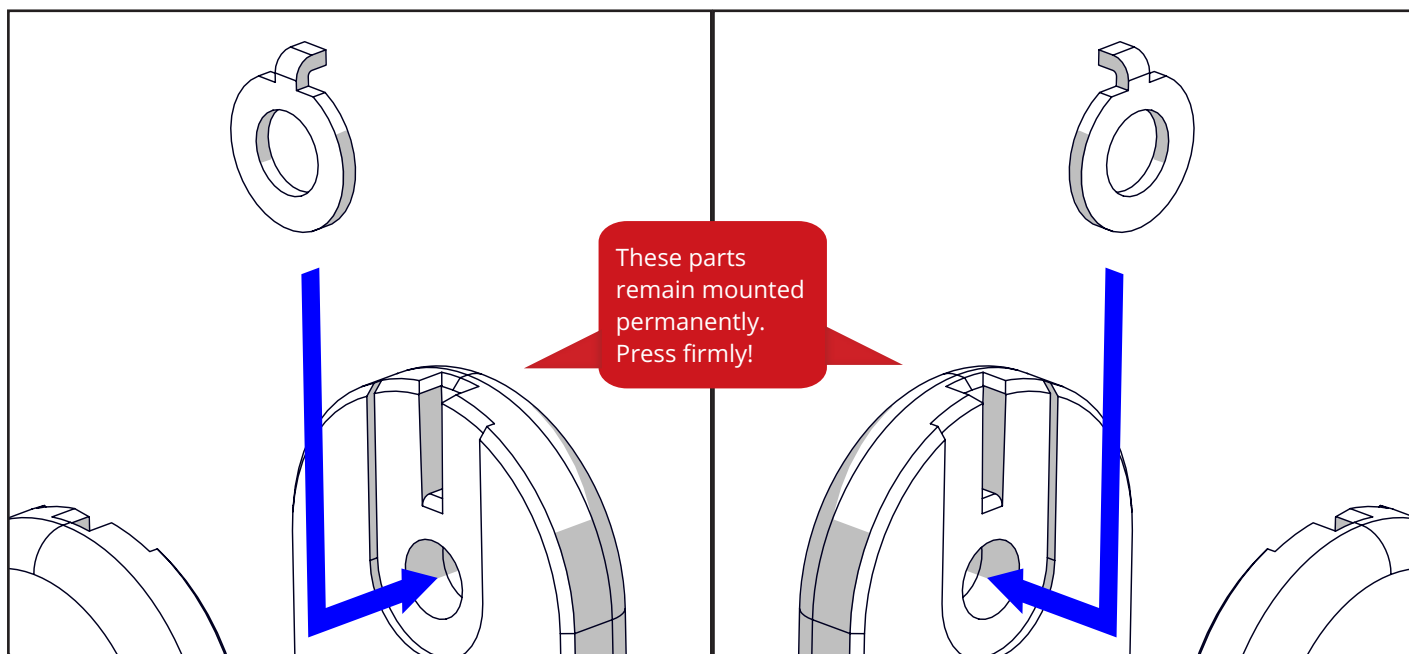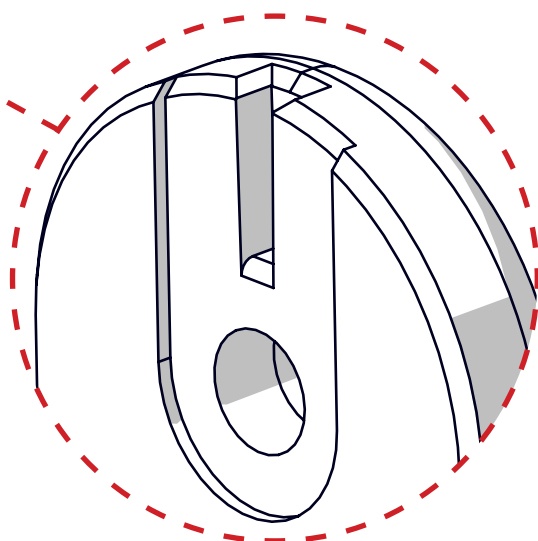



13

ride **BIKER**

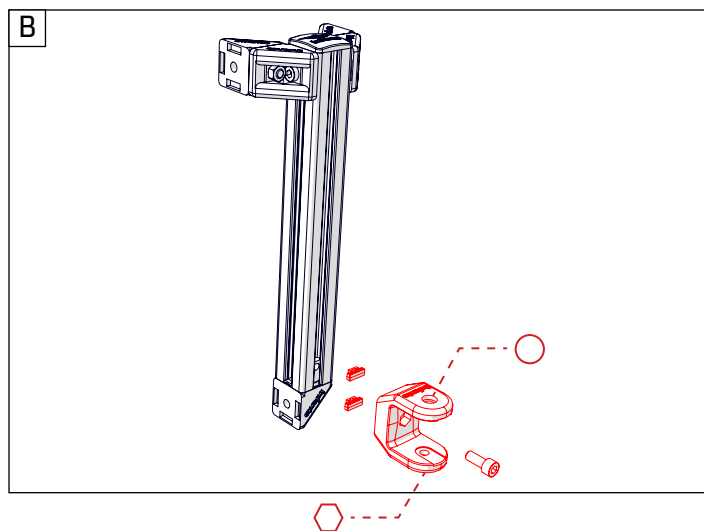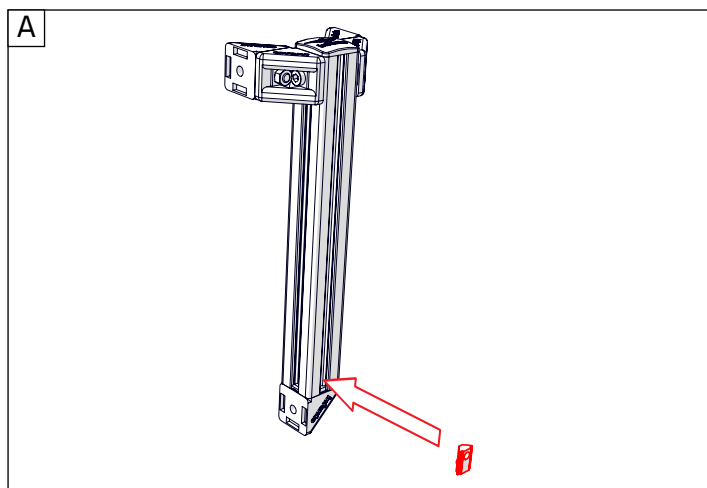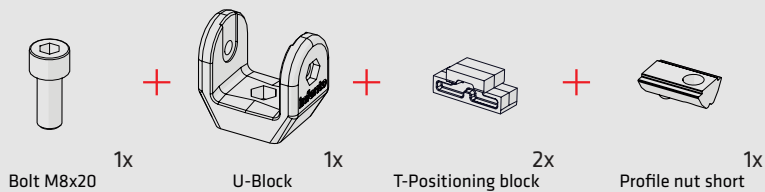






If your U-block or Kit doesn't have the M8-16 Nock Washers, you can use the regular M8-16 washers as shown here.





14


ride **BIKER**

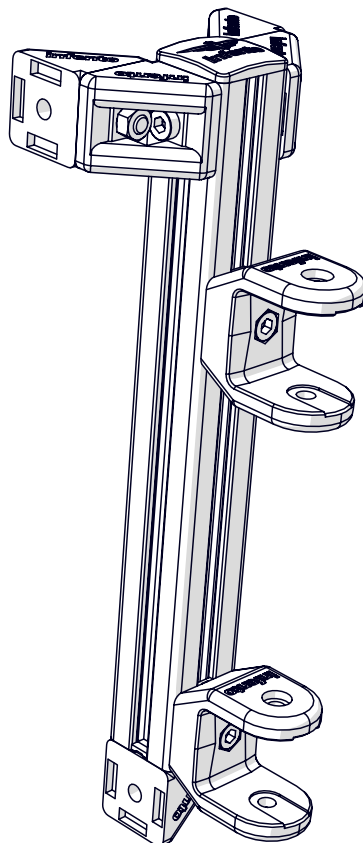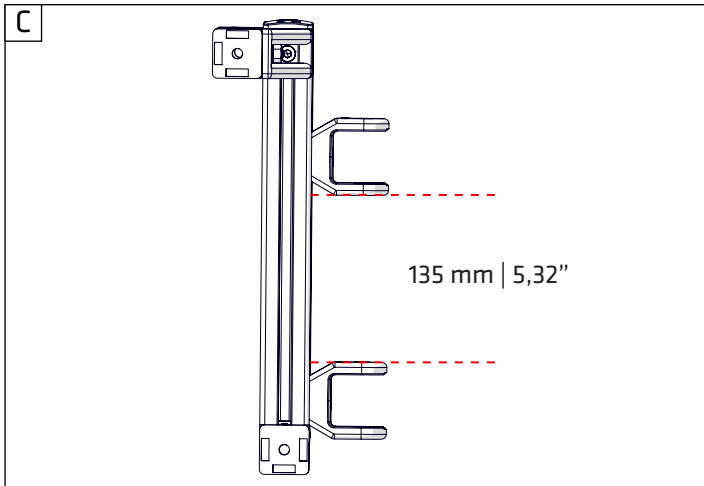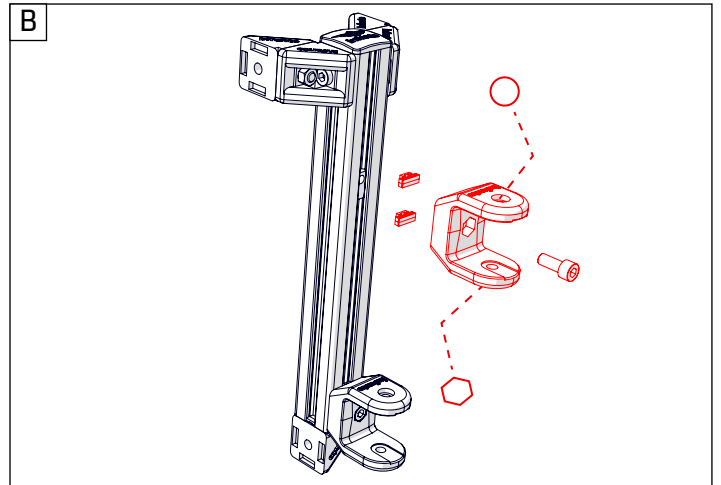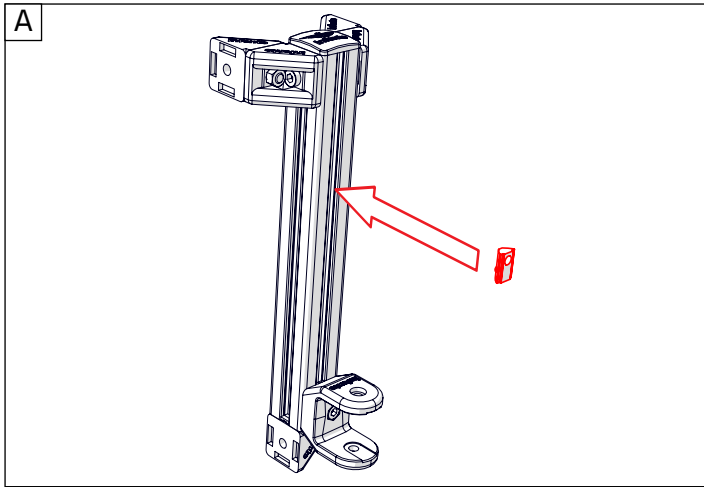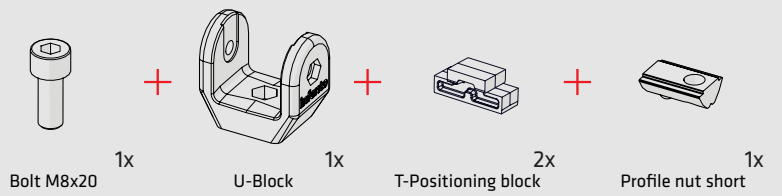



15


ride **BIKER**



Angle limiter
40° 1x



Bolt M8x25 1x



Bearing block
40x40_8 1x



Positioning block 2x






Multi angle joint 1x



Locknut M8 1x

Use the Allen key handle so you can tighten the bolt well.

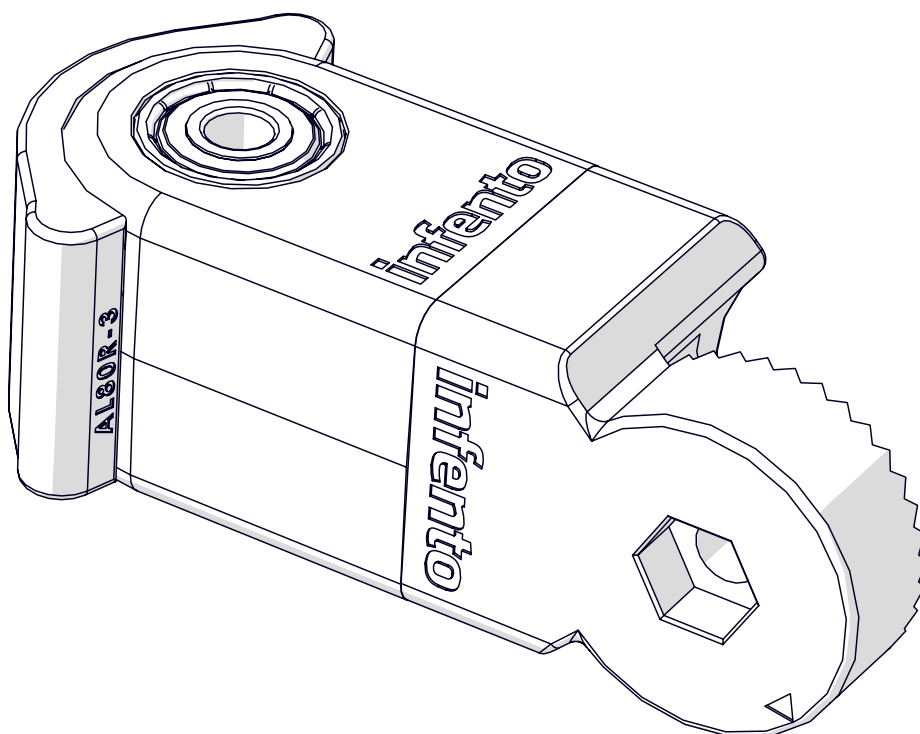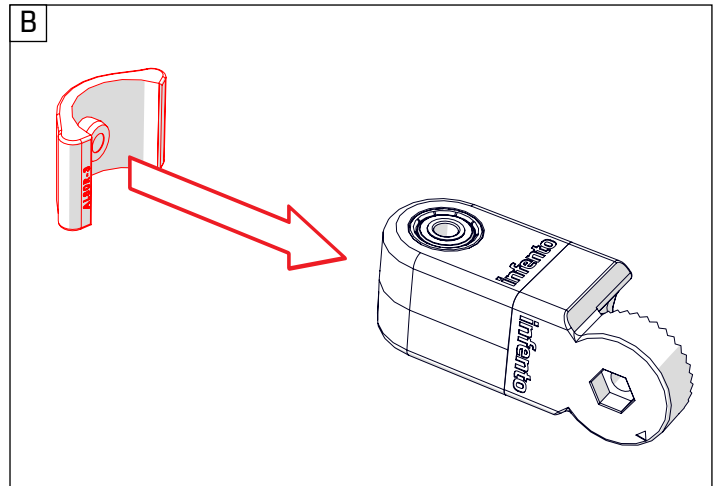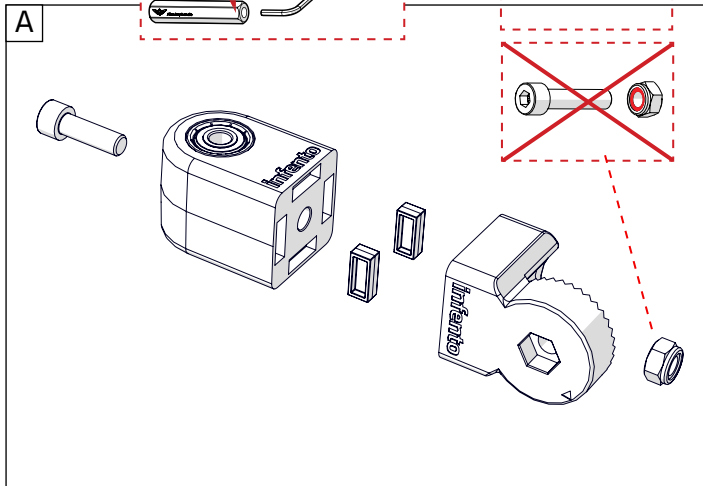



16

ride **BIKER**



1x

Locknut M8



1x


Bolt M8x60




2x

Washer M8-16



A

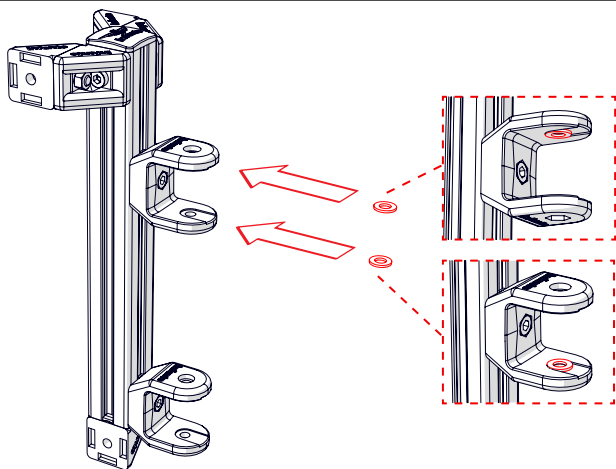

B

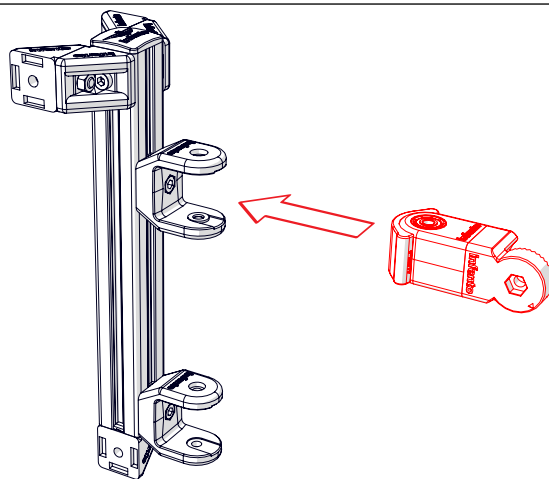






C

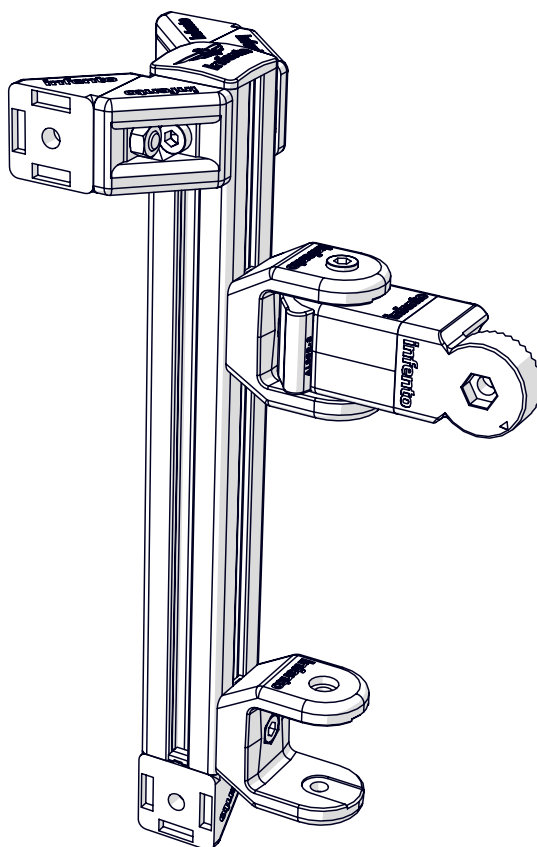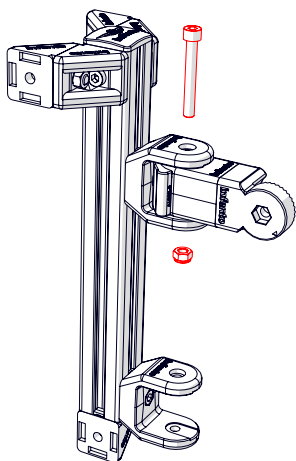



17

ride **BIKER**

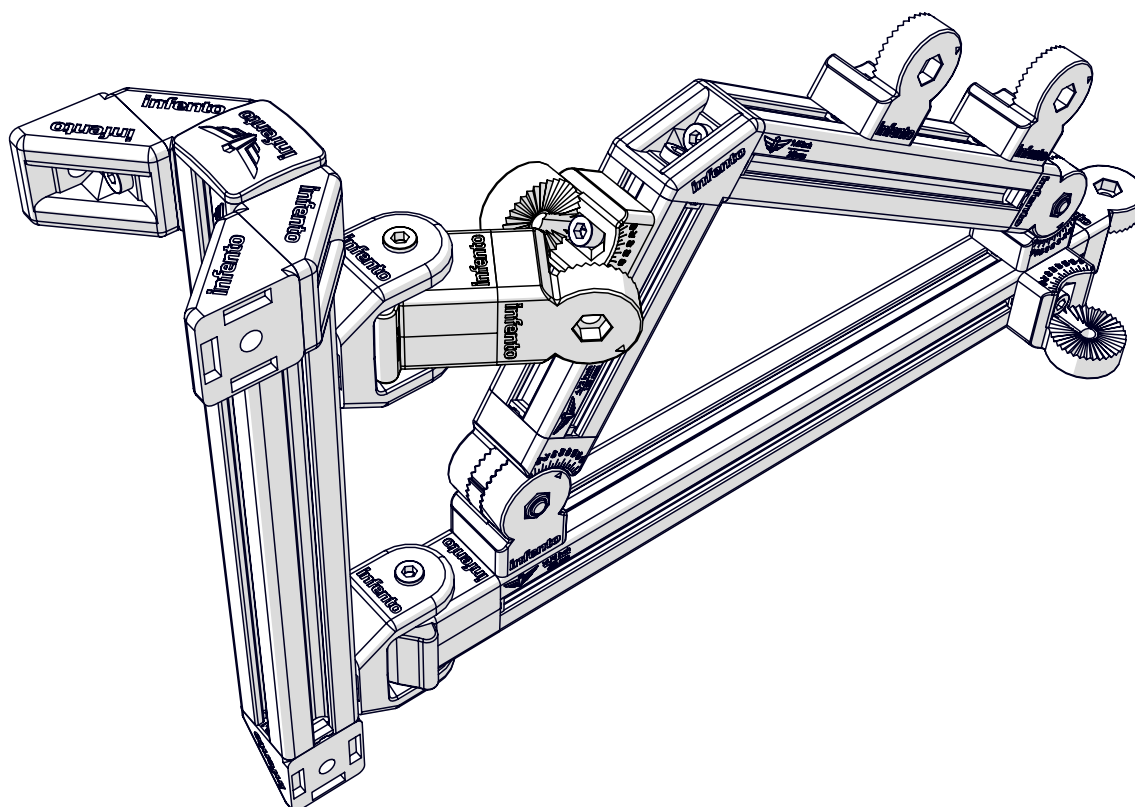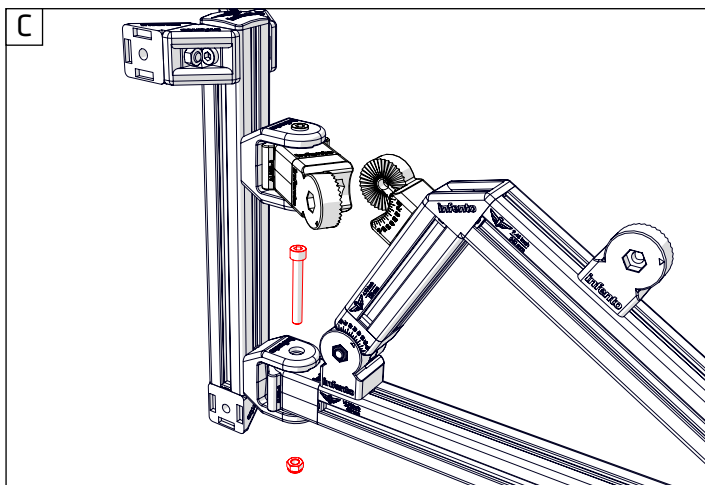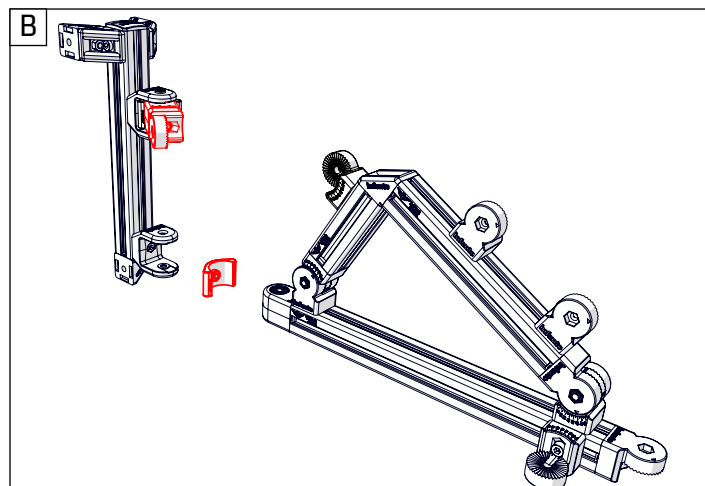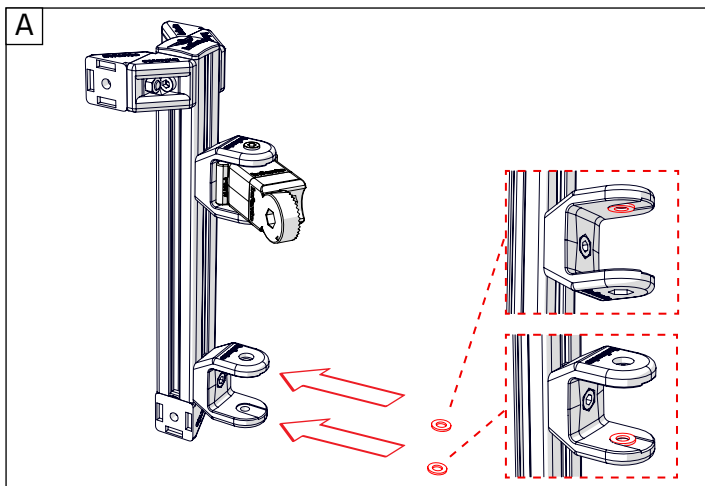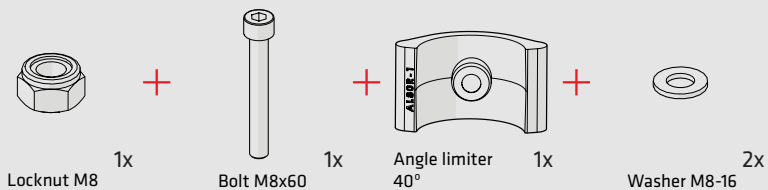



18

ride **BIKER**




Locknut M8

1x






Bolt M8x35

1x



Knurled disc 2 stripes

1x

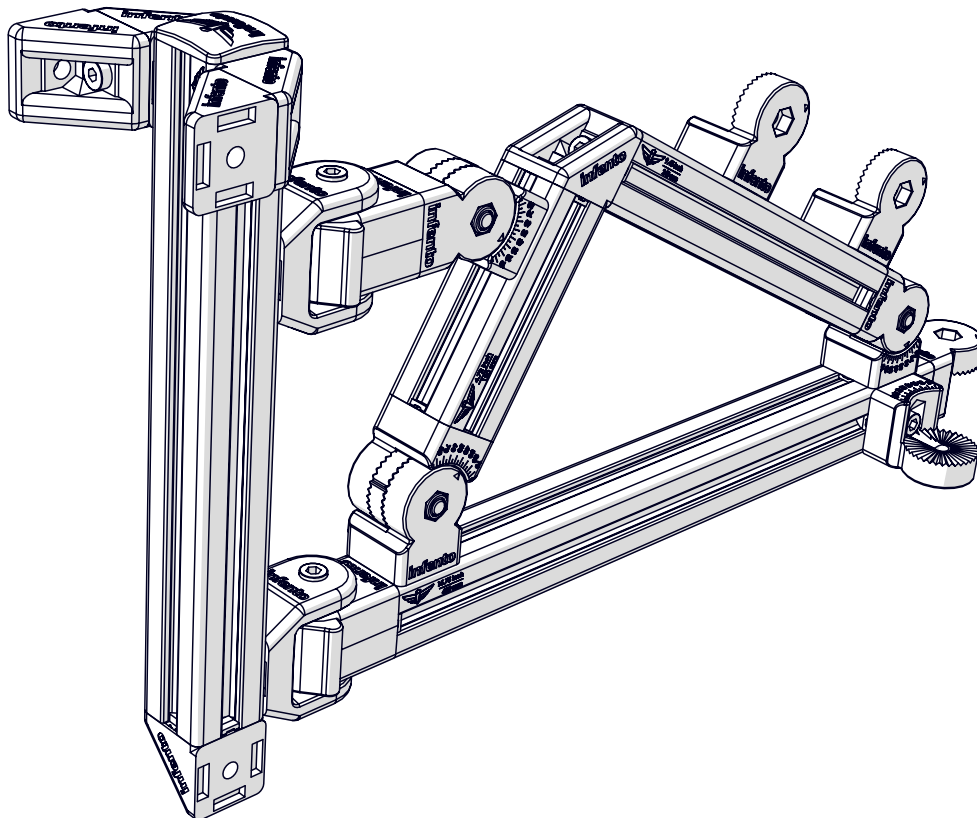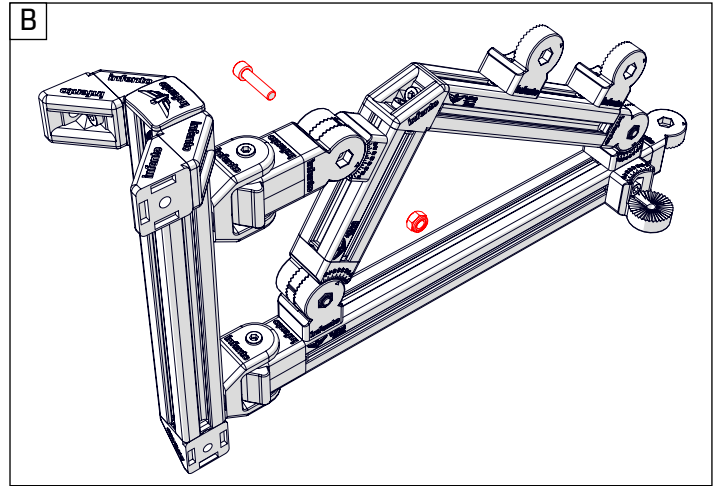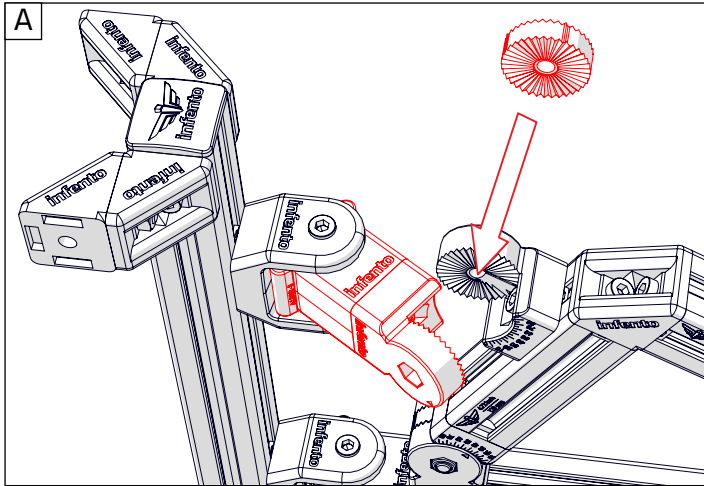



19

ride **BIKER**



Axle clamp

1x



Bolt M8x20 nylock

1x



Bolt M8x20
(low head)

1x




L-joint

1x



T-Positioning block


1x





Profile
11.02 inch | 280 mm

1x

A

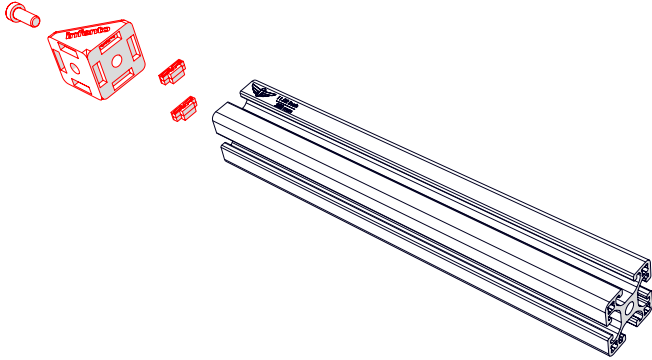

B



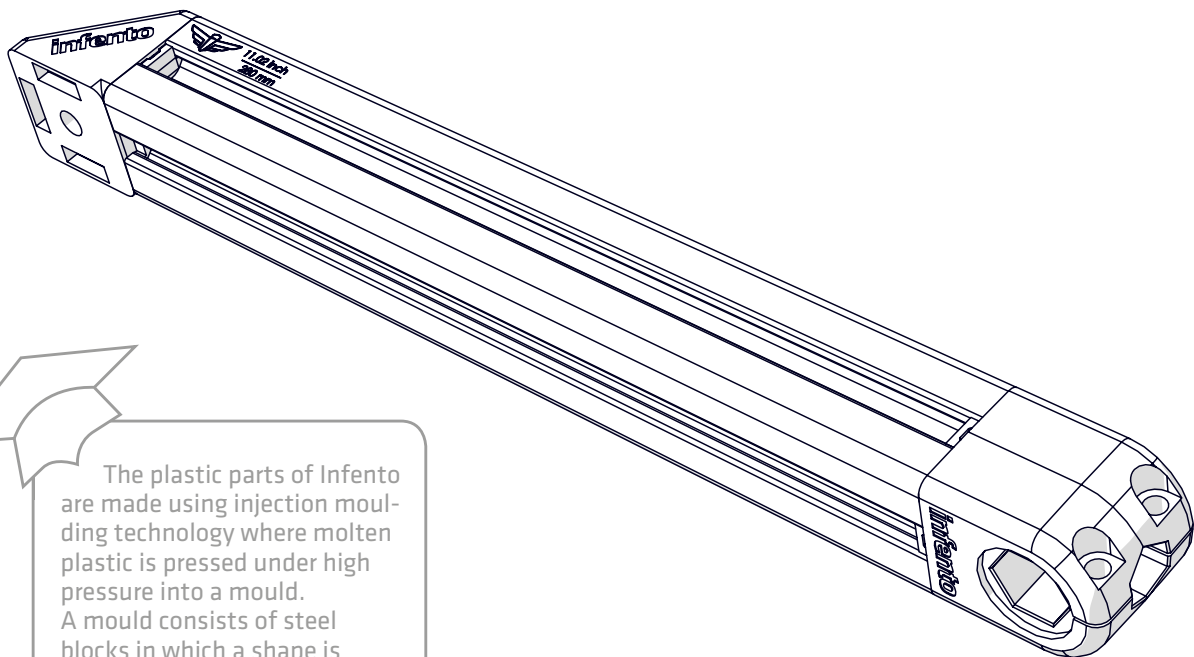
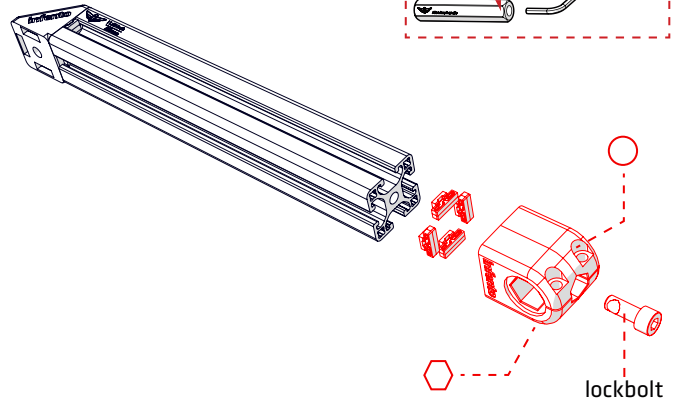


The plastic parts of Infento are made using injection moulding technology where molten plastic is pressed under high pressure into a mould. A mould consists of steel blocks in which a shape is recessed.



20

ride **BIKER**

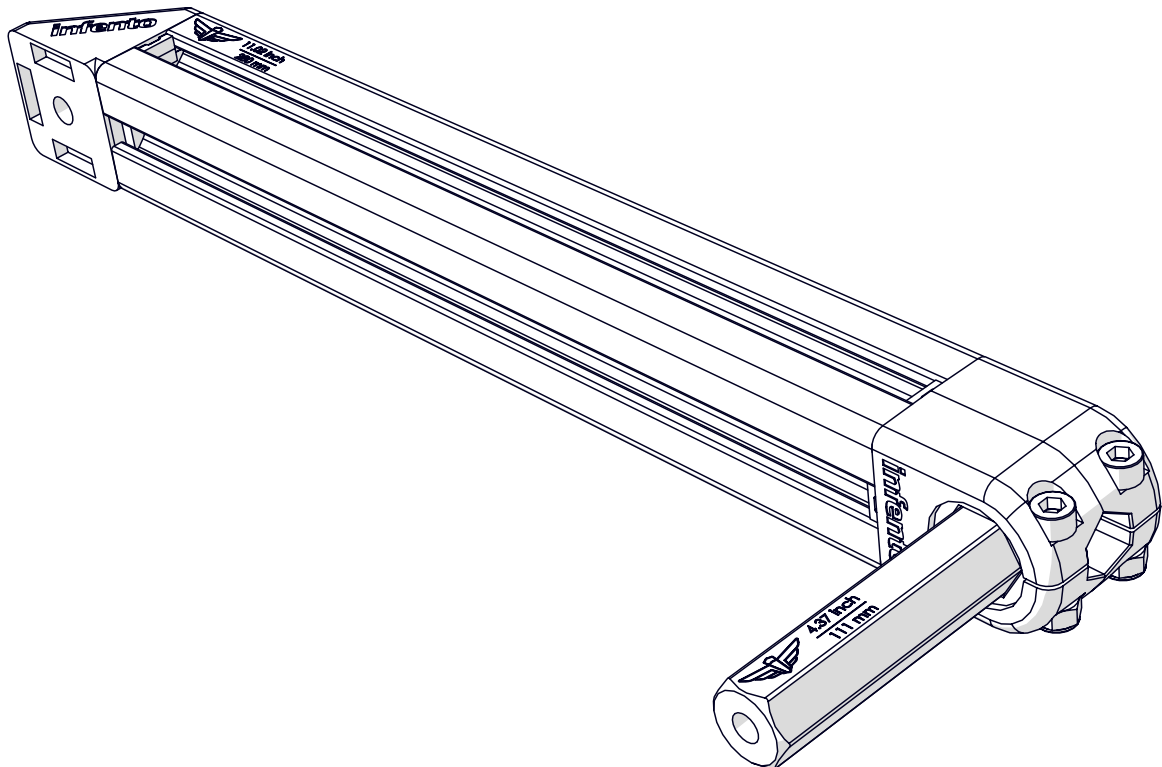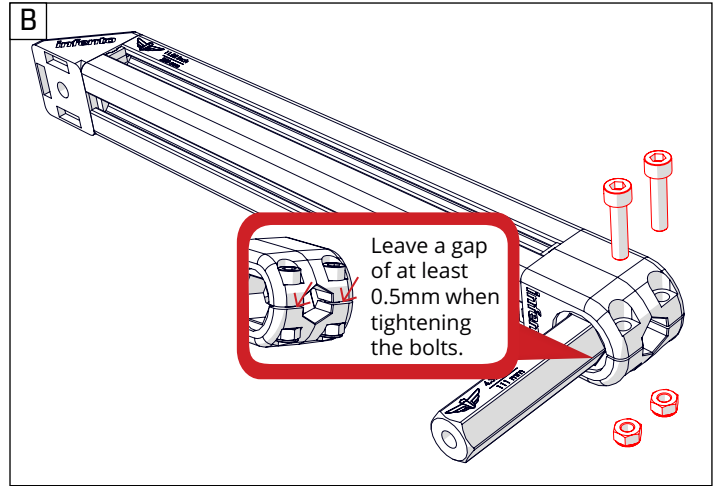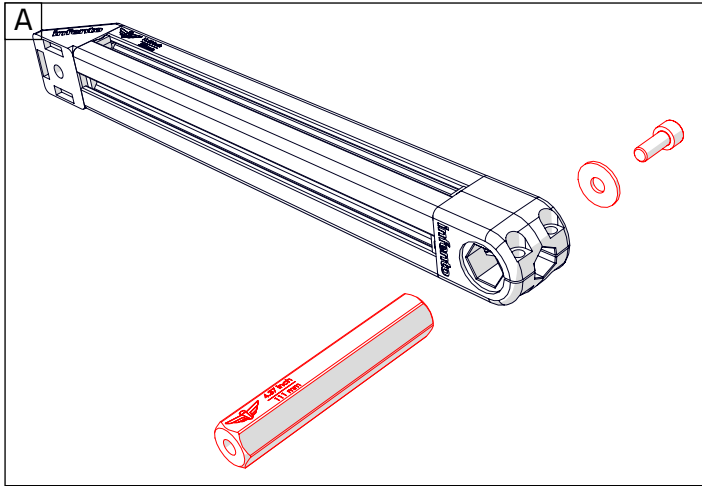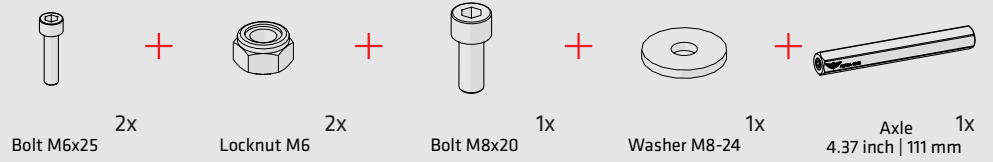



21

ride **BIKER**



Bolt M8x20
(low head) 1x

+



L-joint 1x

+




T-Positioning block 2x

+




Profile nut short 1x

A


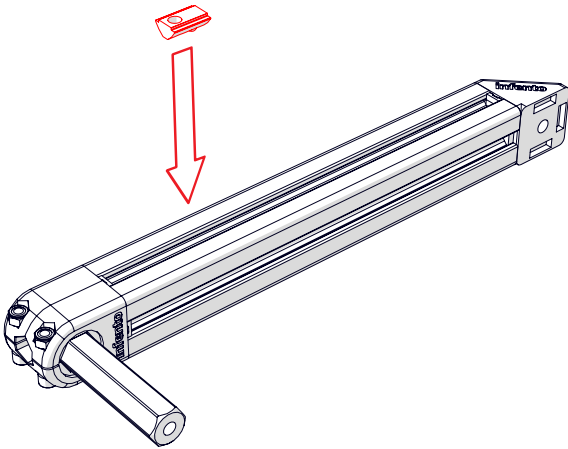


B

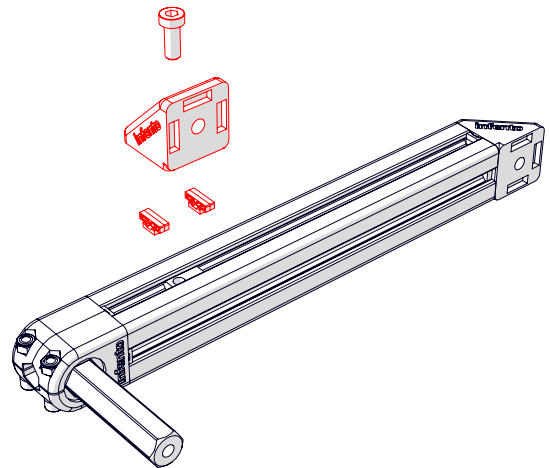

C


30 mm | 1,18"

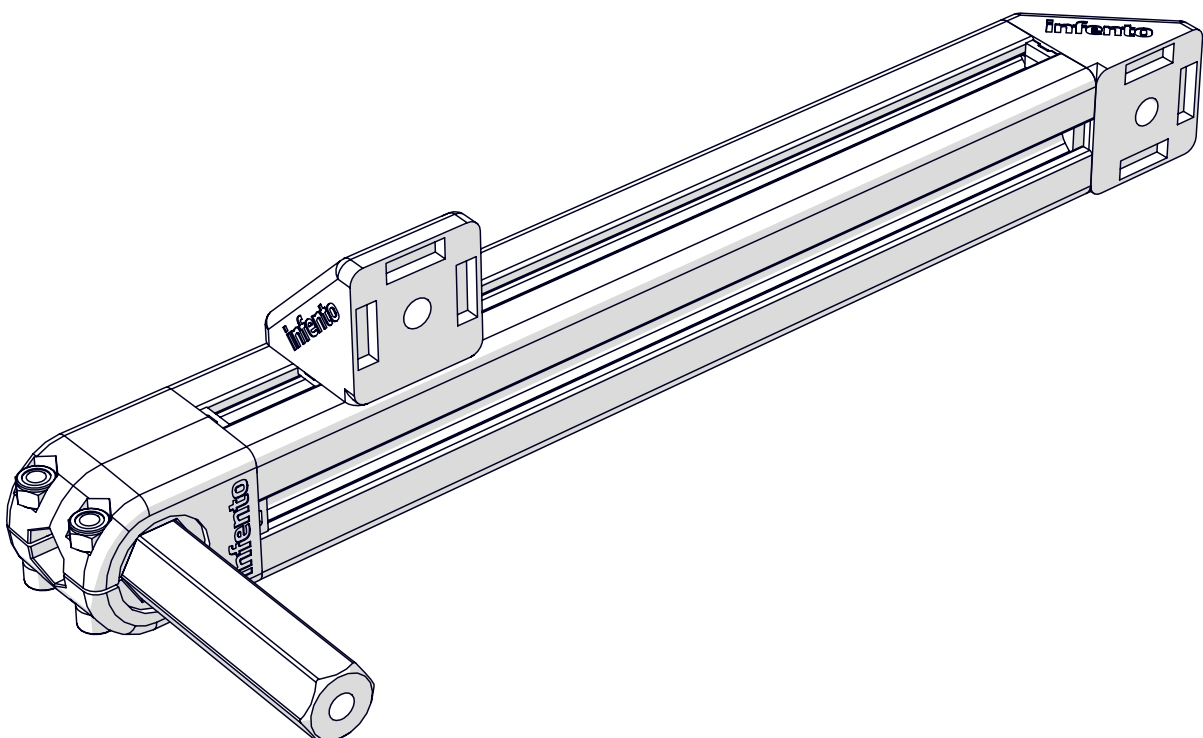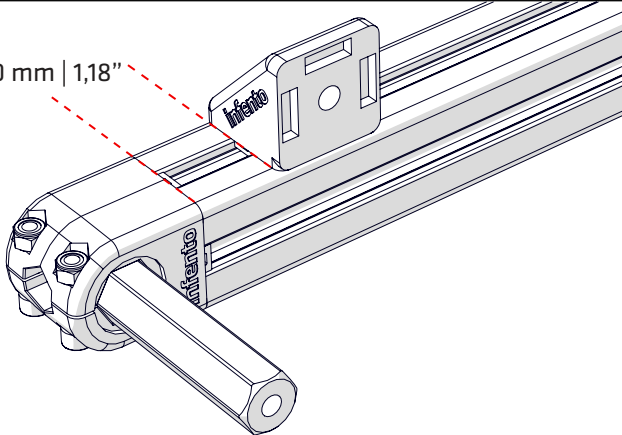







22

ride **BIKER**

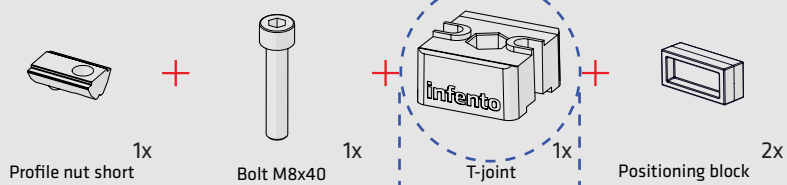





Depending on your Kit, the T-joint might look like this. The new T-joint doubles as a profile connector (part A)

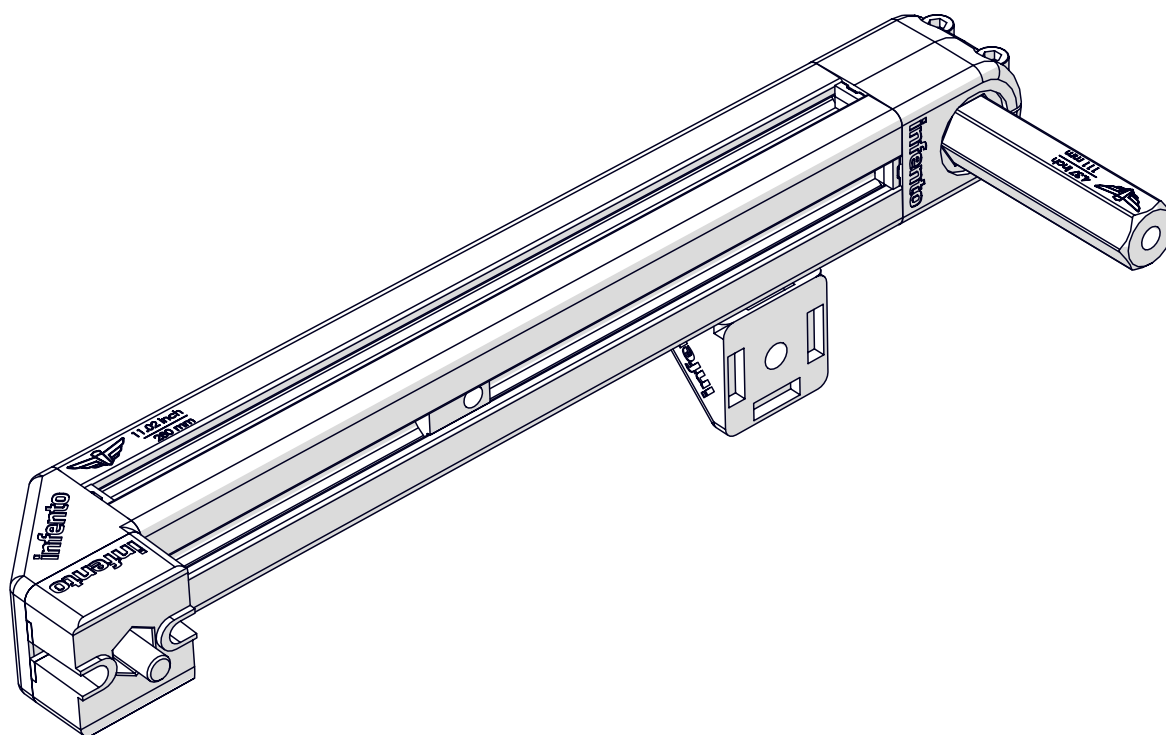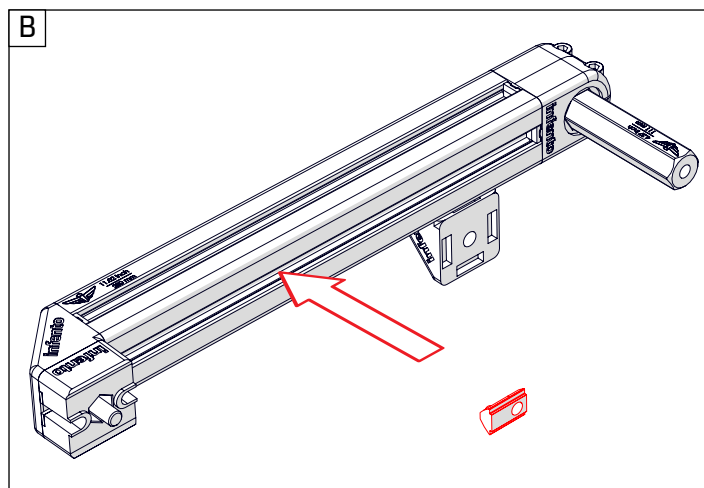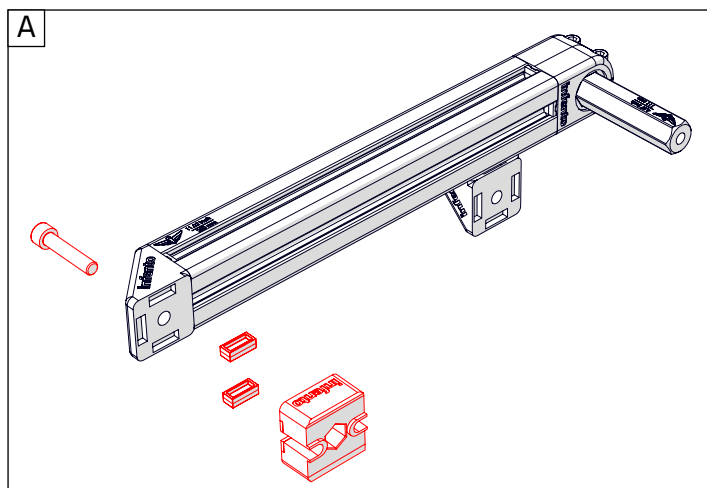



23




ride **BIKER**

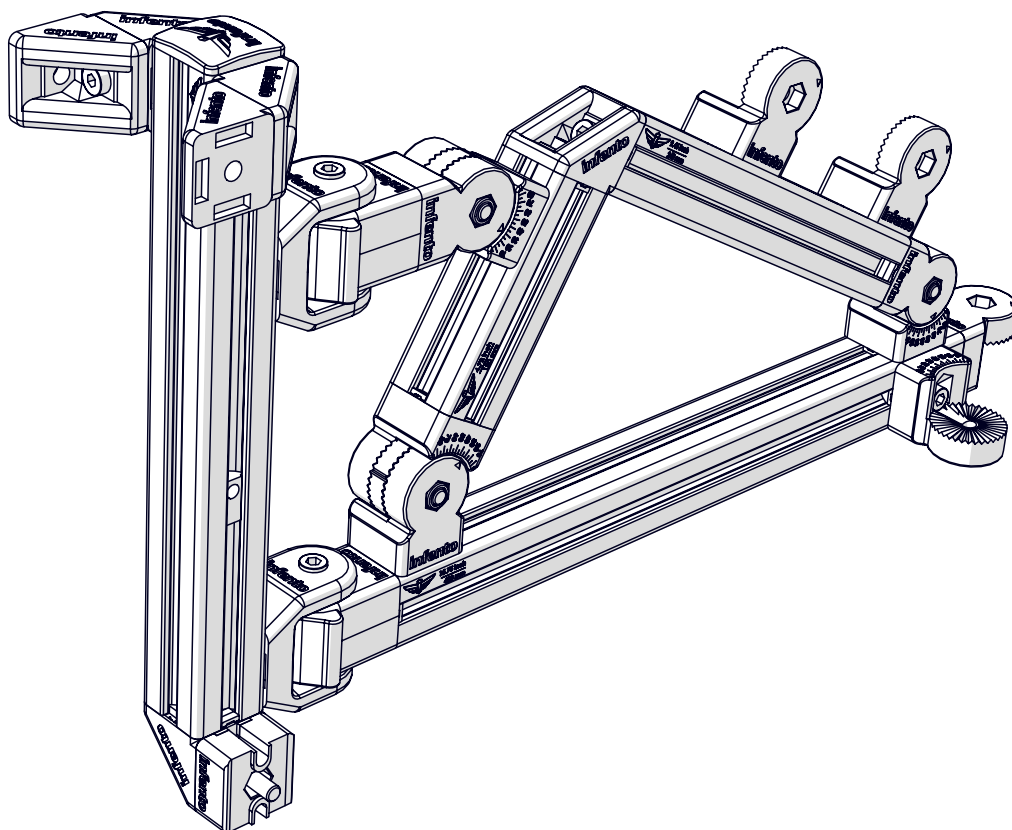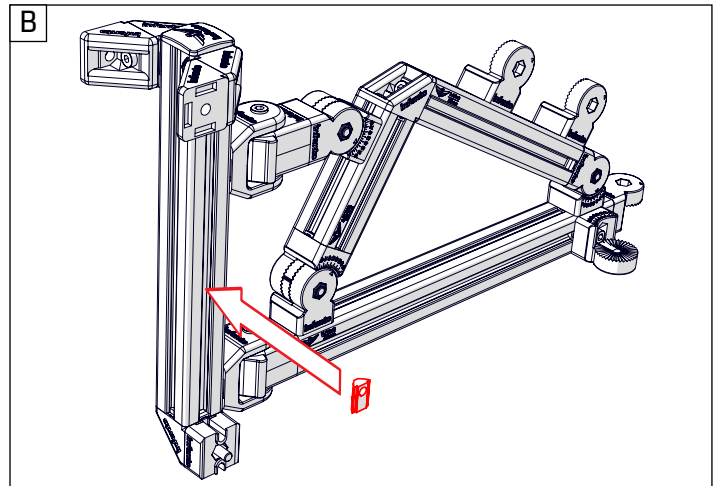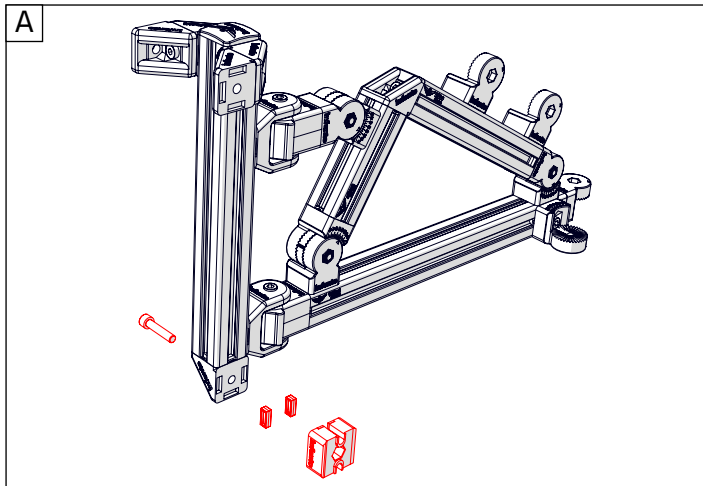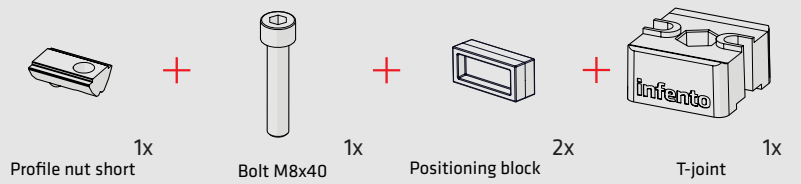



24





ride **BIKER**

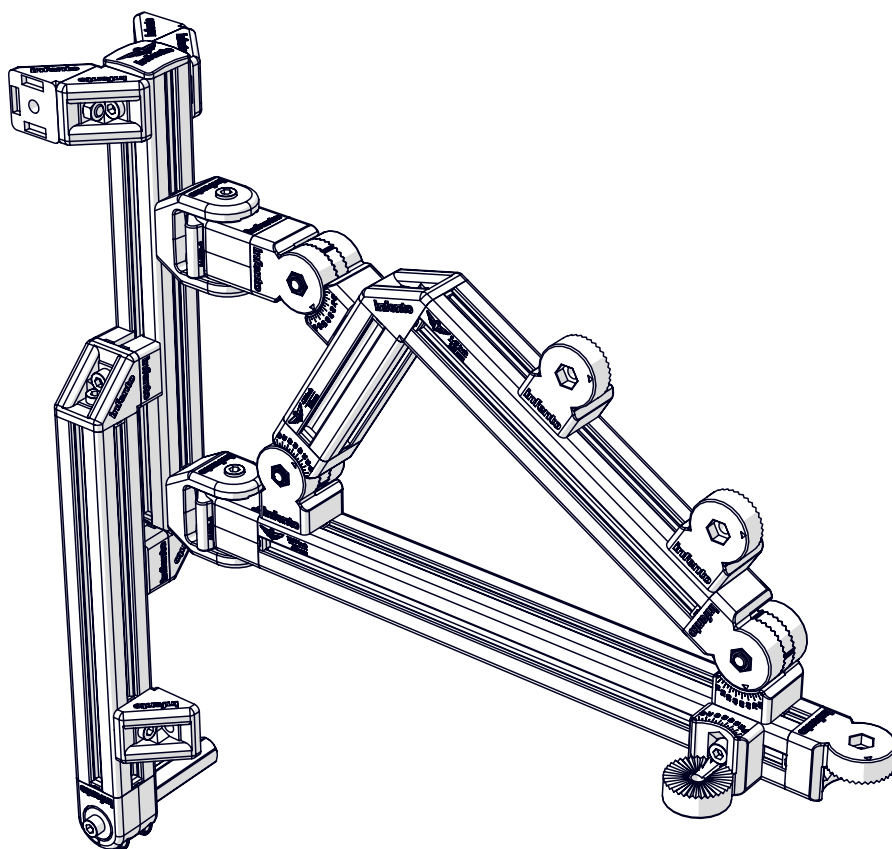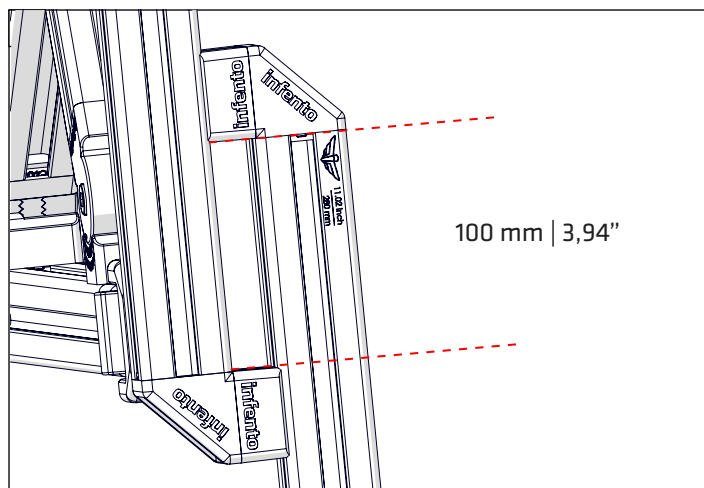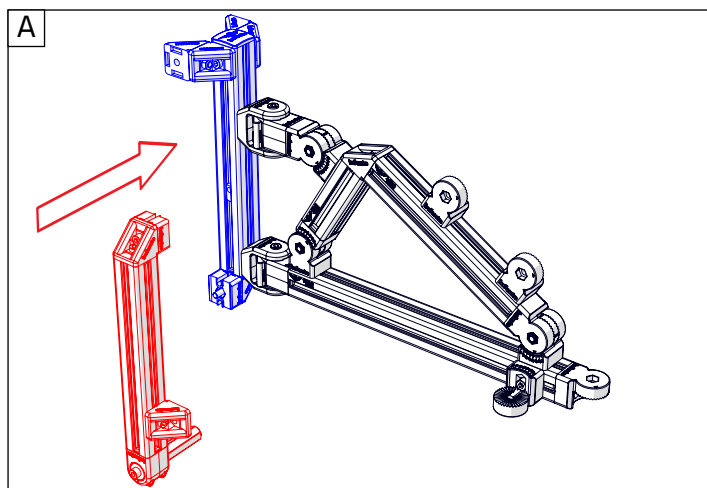



25

ride **BIKER**

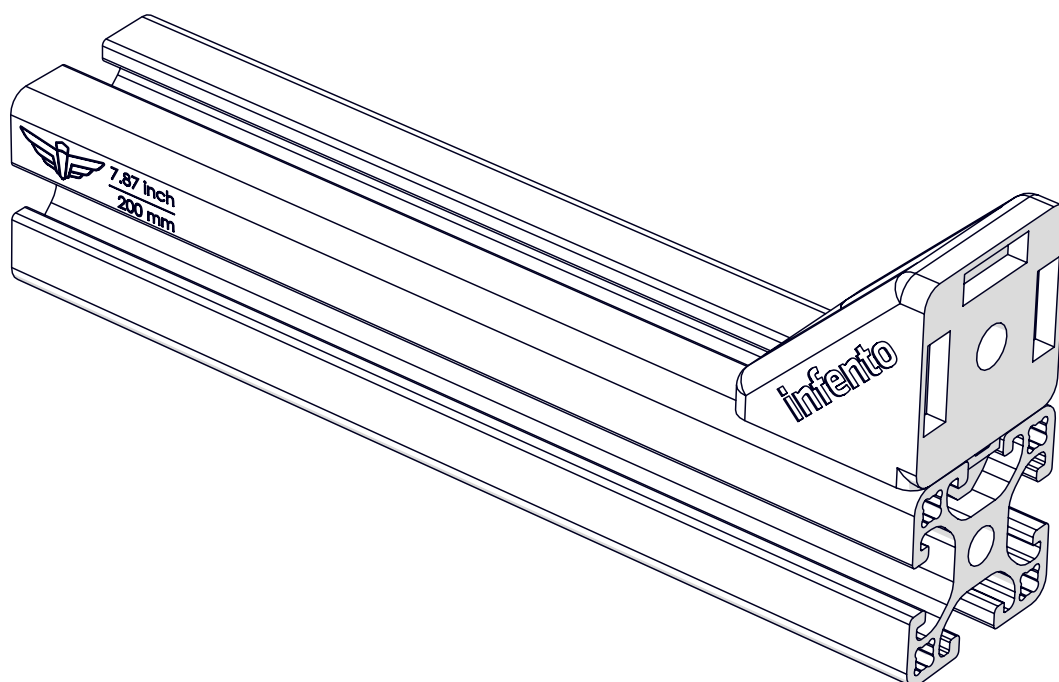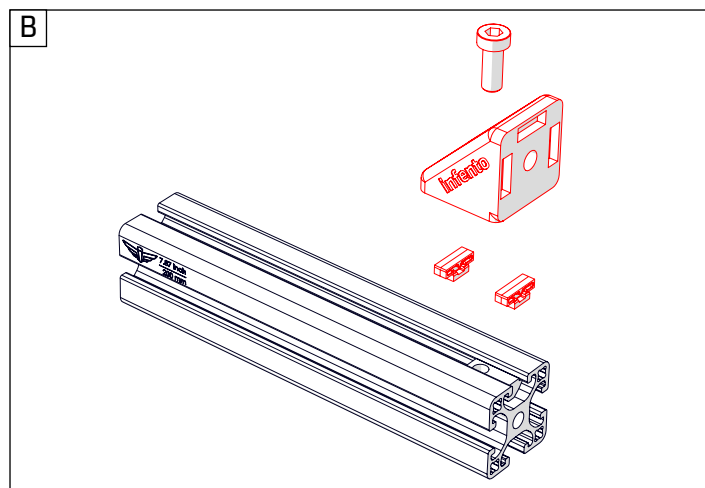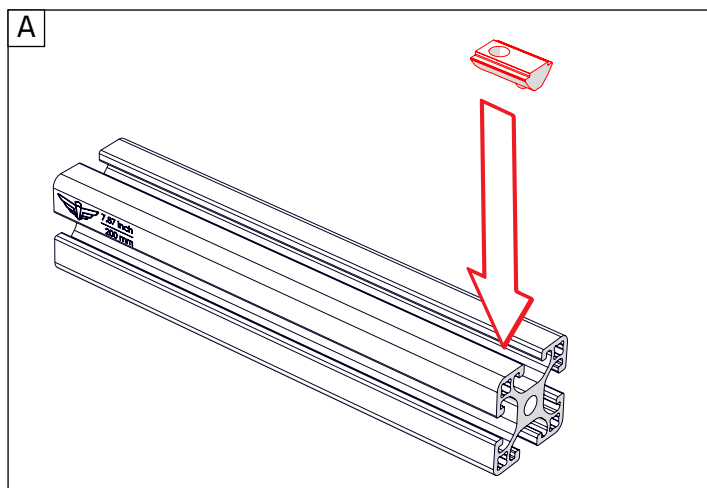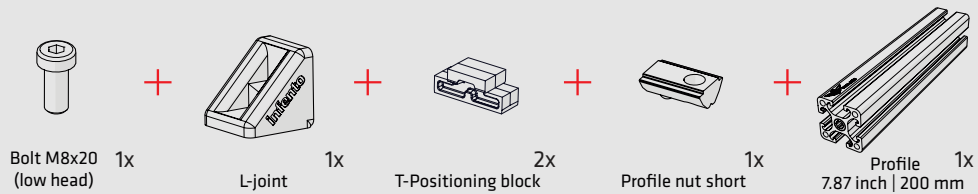



26

ride **BIKER**



Locknut M8

1x




Bolt M8x25
(low head)

1x



Bolt M8x20

1x



Bearingblock
40x80_hexa 19

1x



T-Positioning block


1x





Positioning block

2x

A

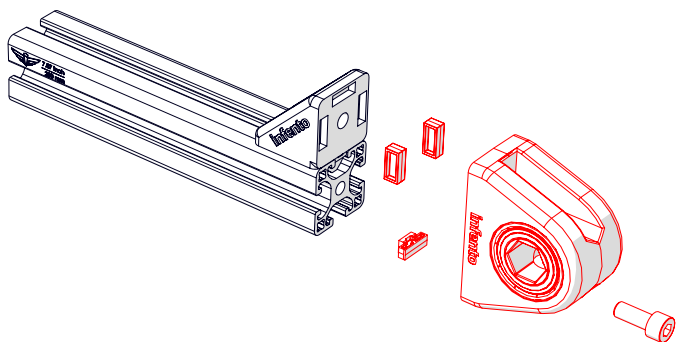







B

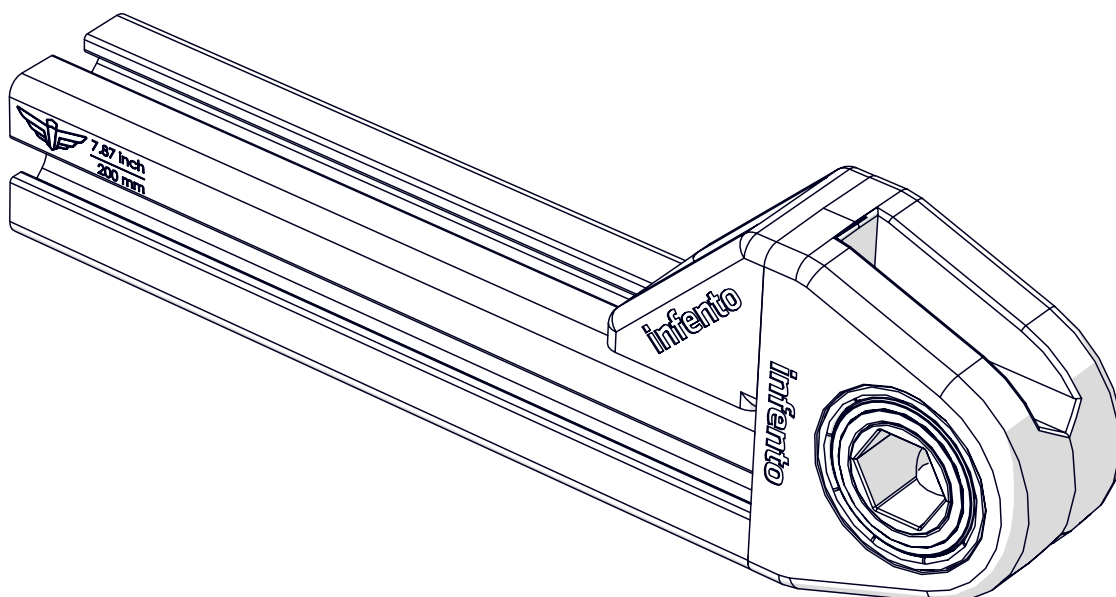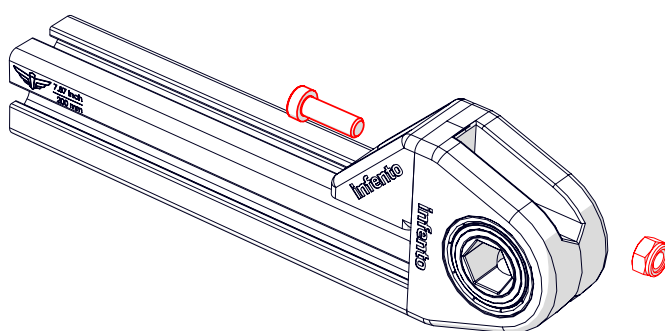



27

ride **BIKER**

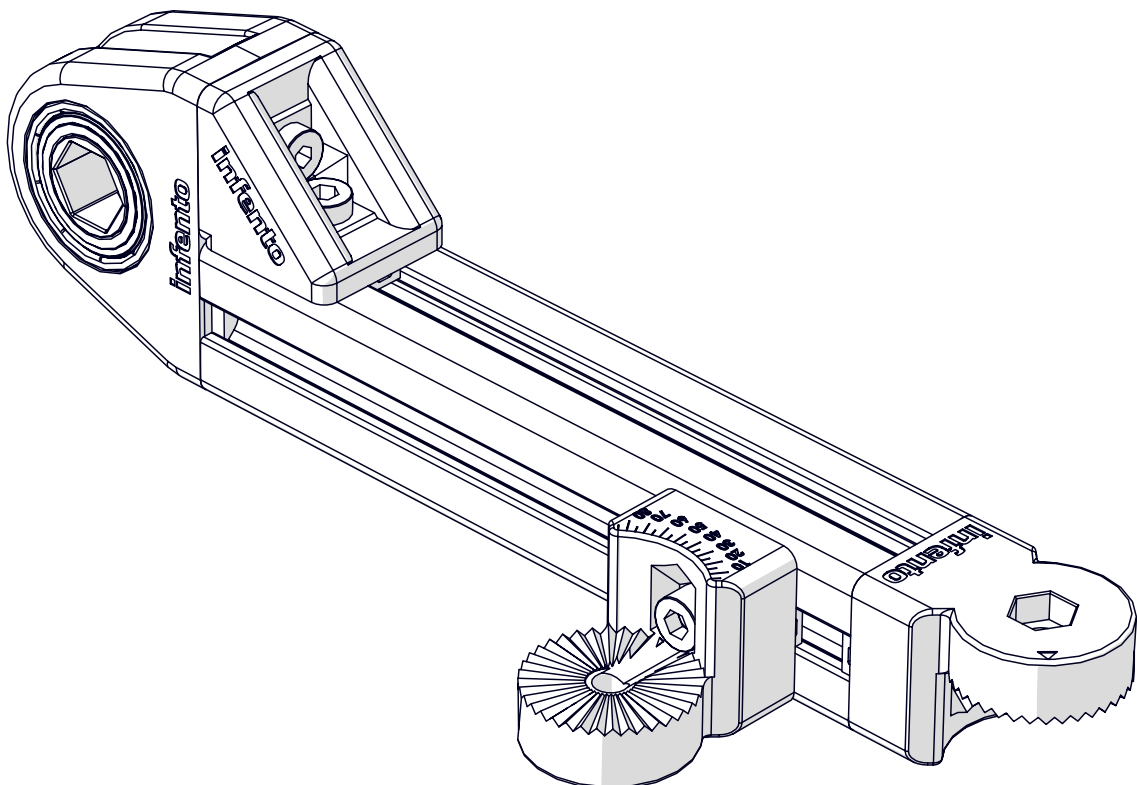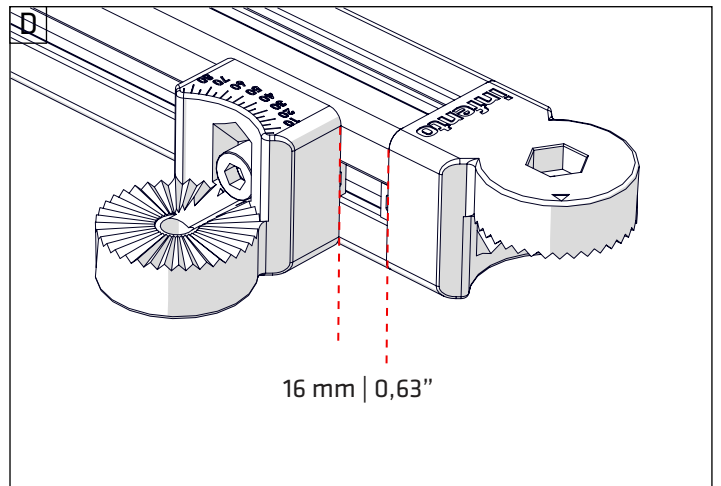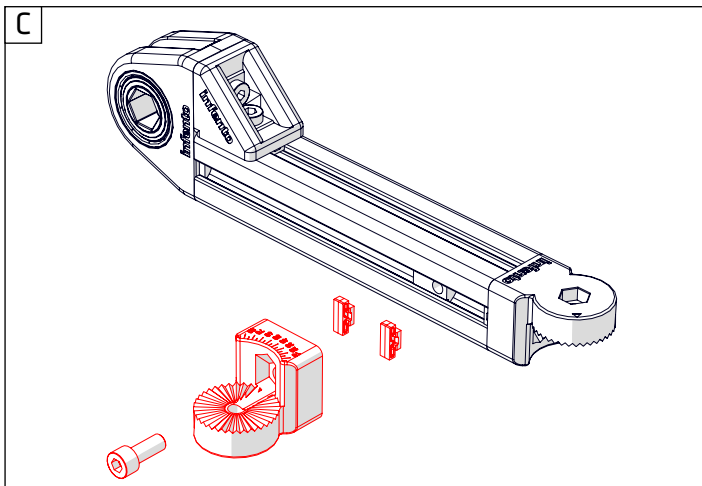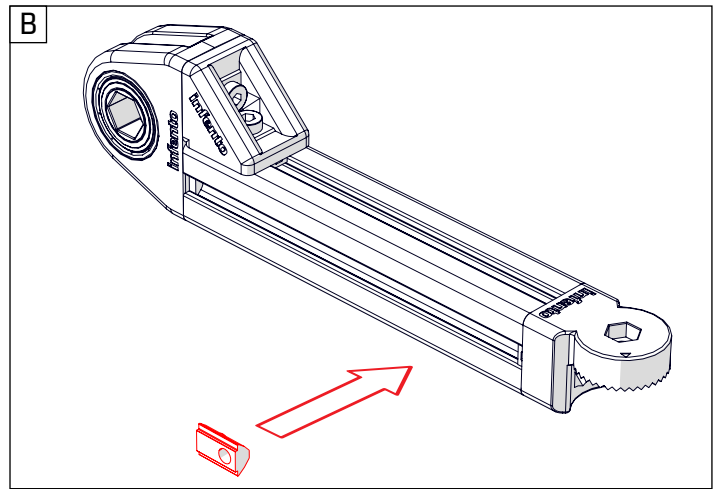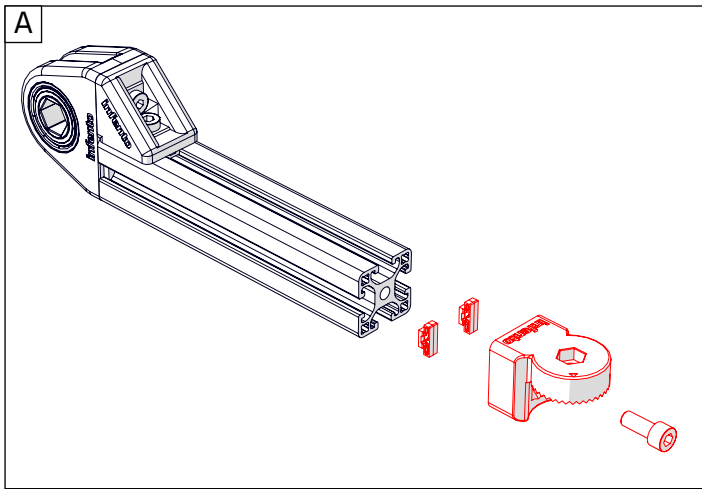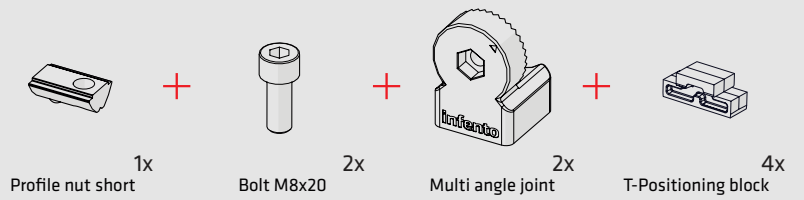



28

ride **BIKER**




2x

Locknut M8



2x


Bolt M8x35





2x

Knurled disc 2 stripes

A

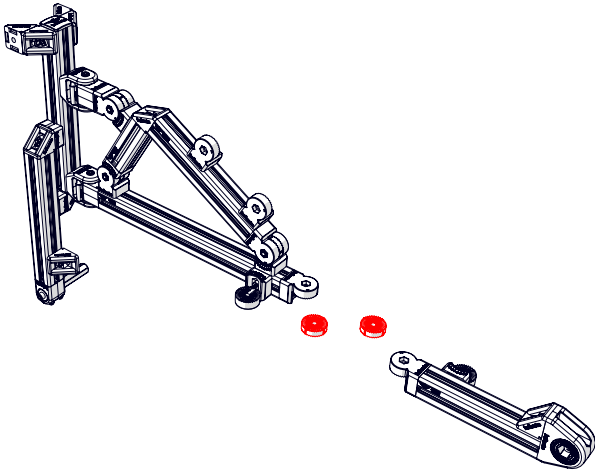


B

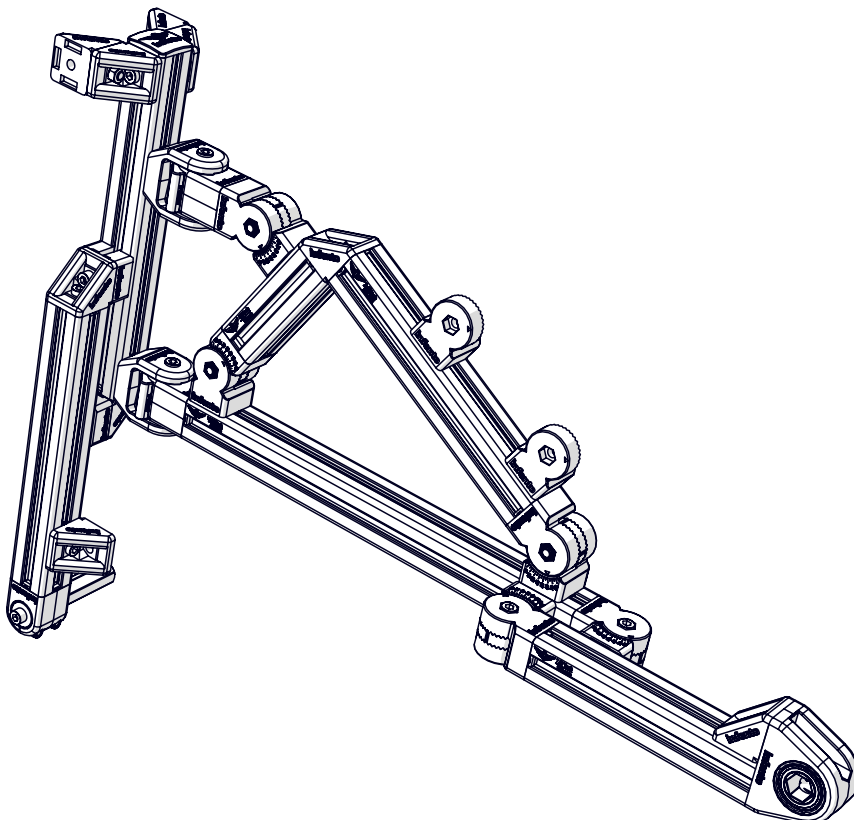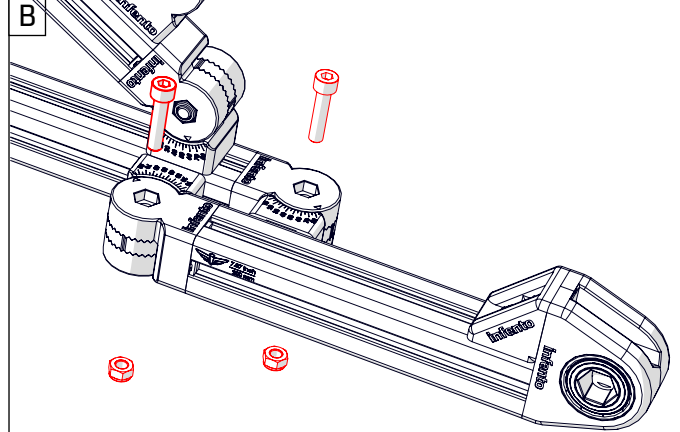





29

ride **BIKER**

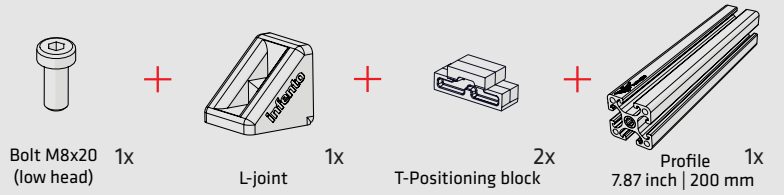







This side has 3 position holes.

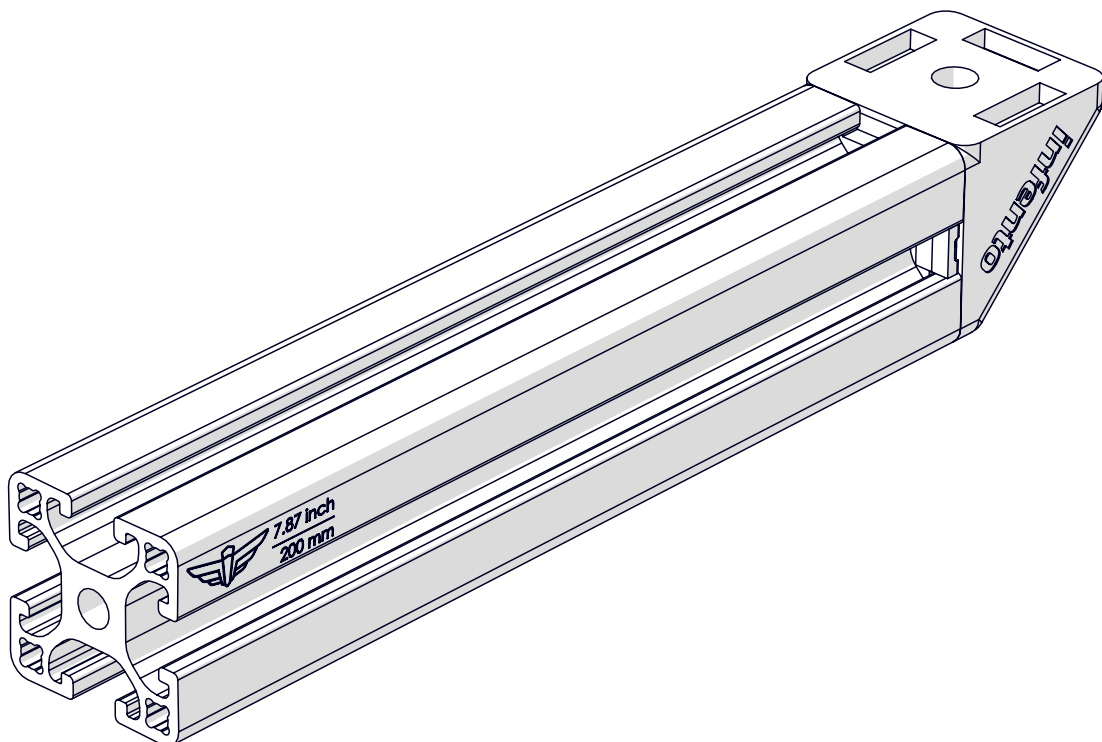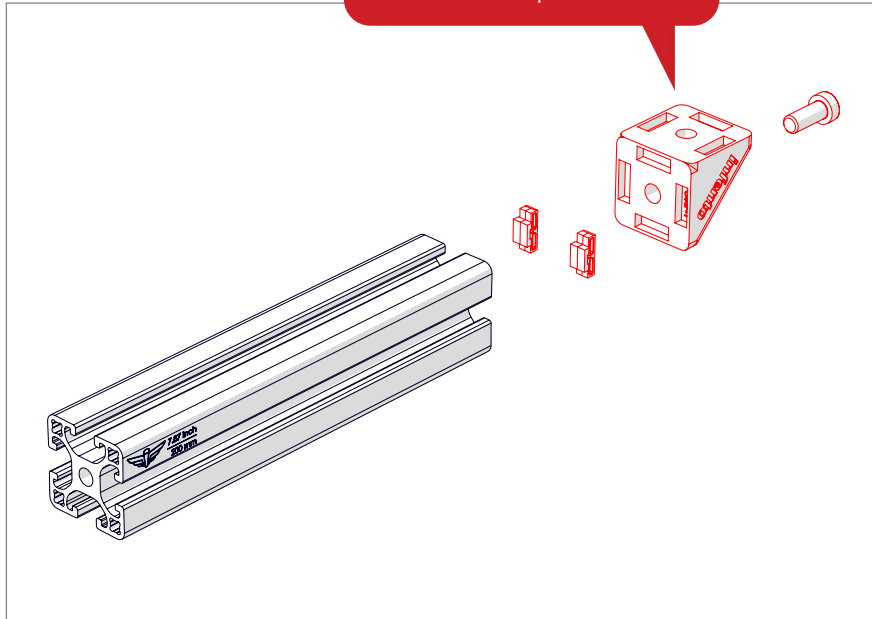



30

ride **BIKER**

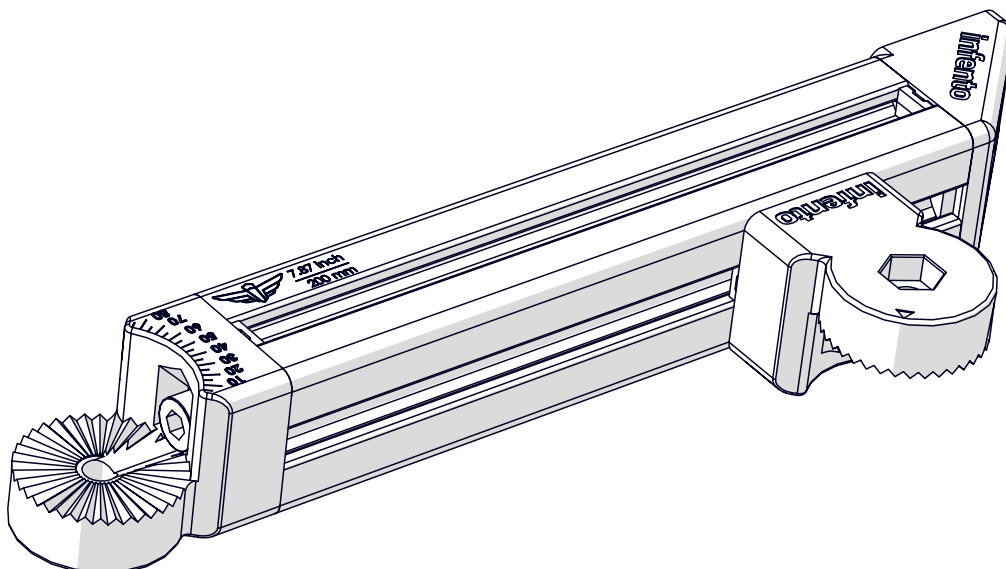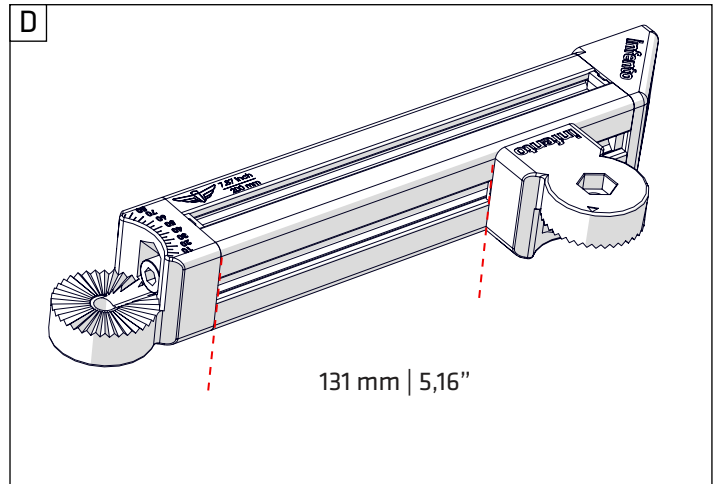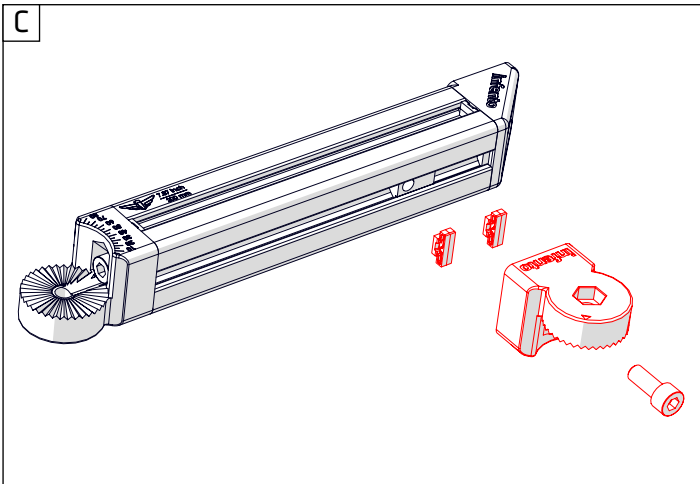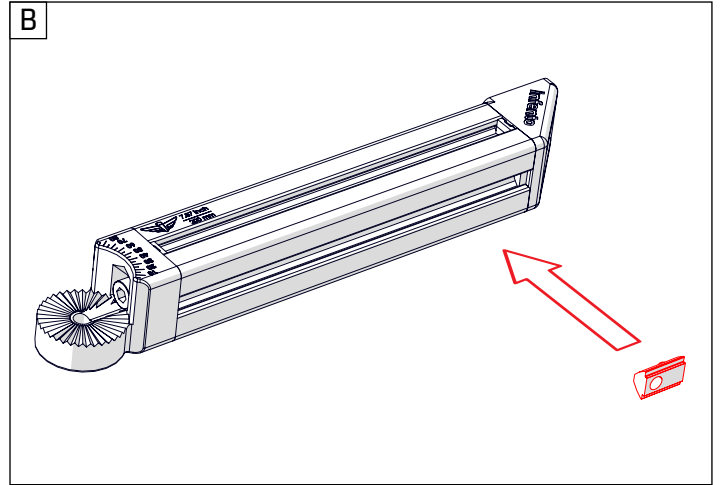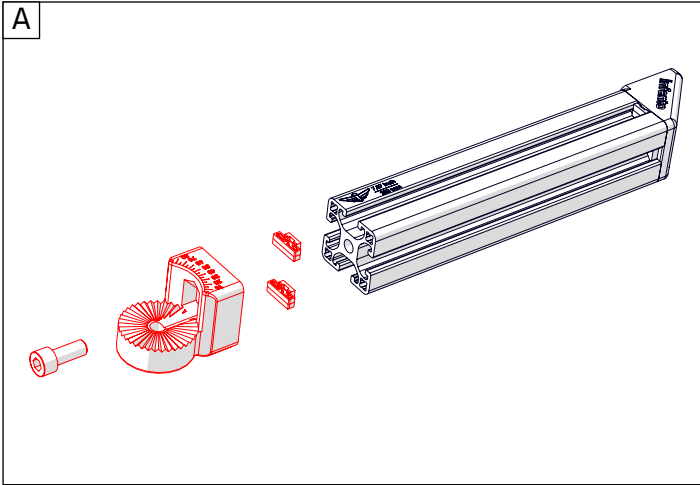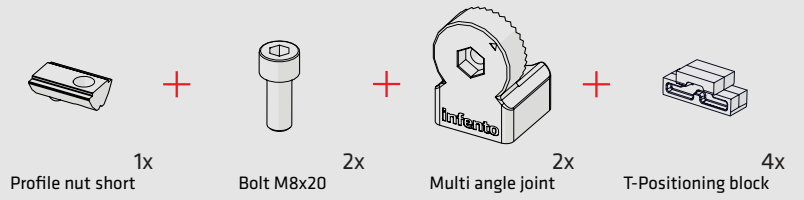




31

ride **BIKER**



Bolt M8x35

1x



Knurled disc 2 stripes


1x





Locknut M8

1x

A

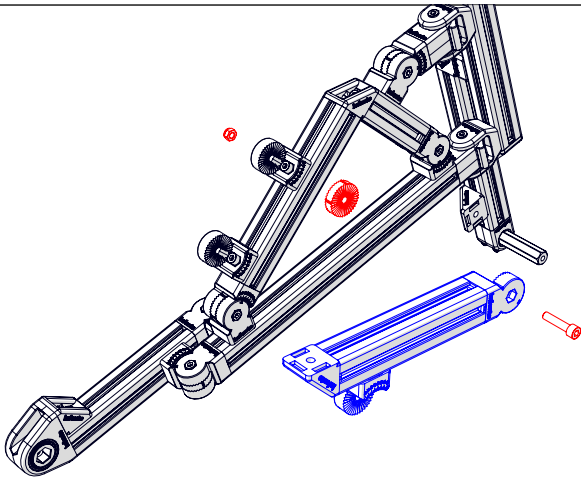




B

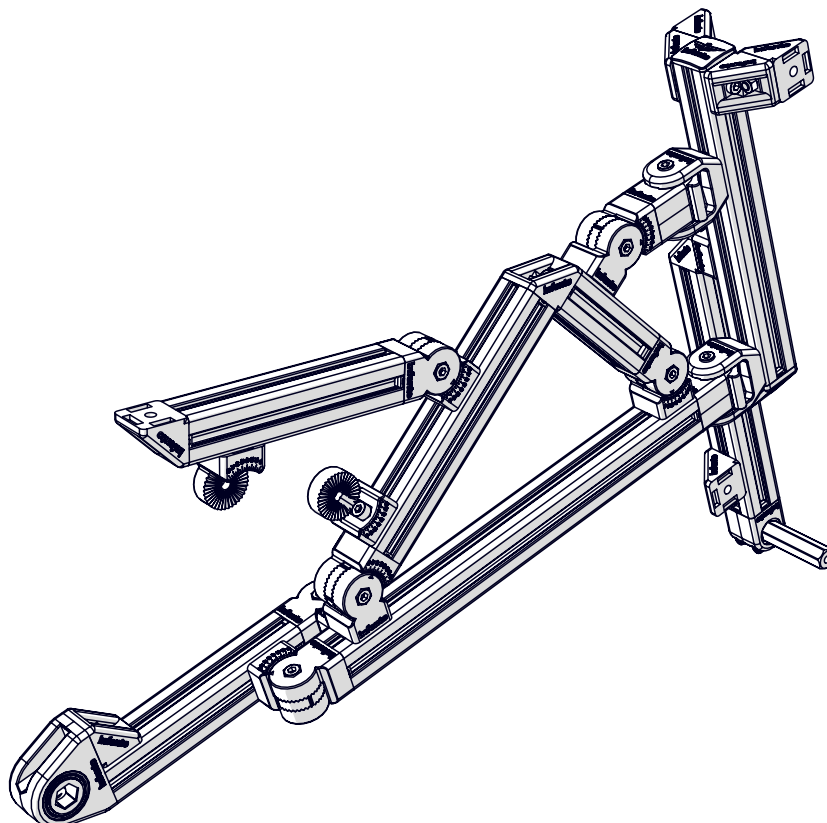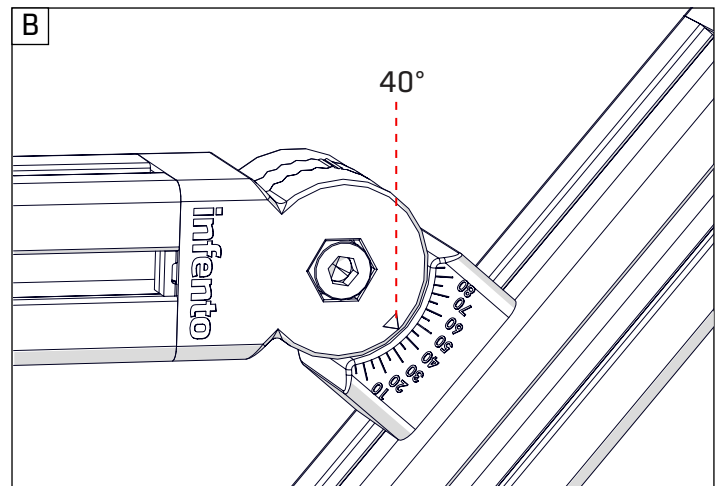



32

ride **BIKER**

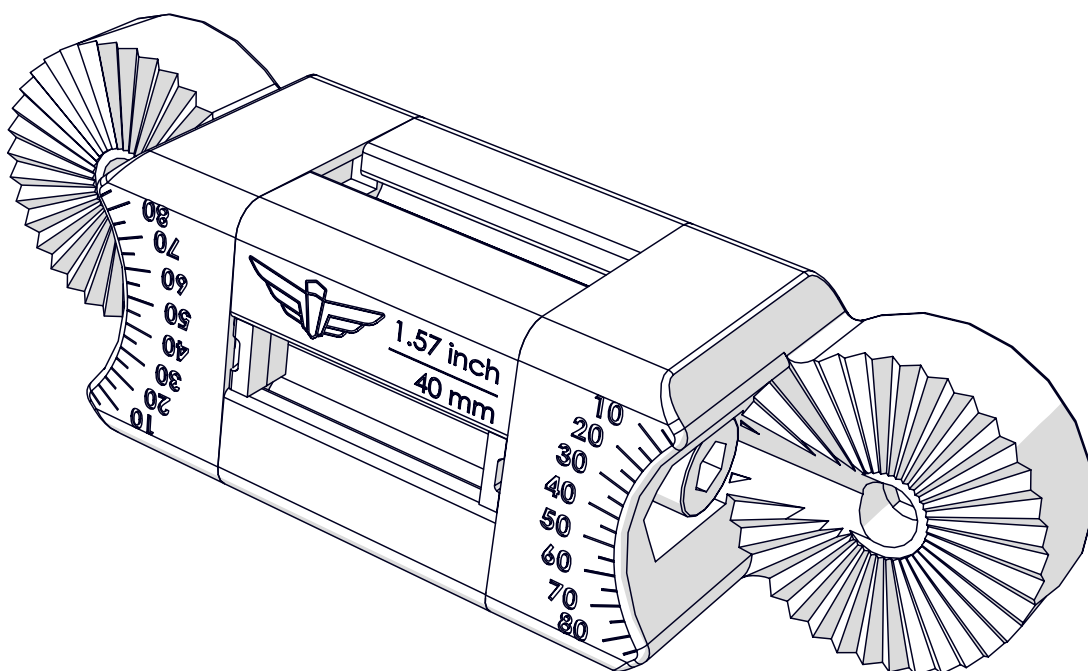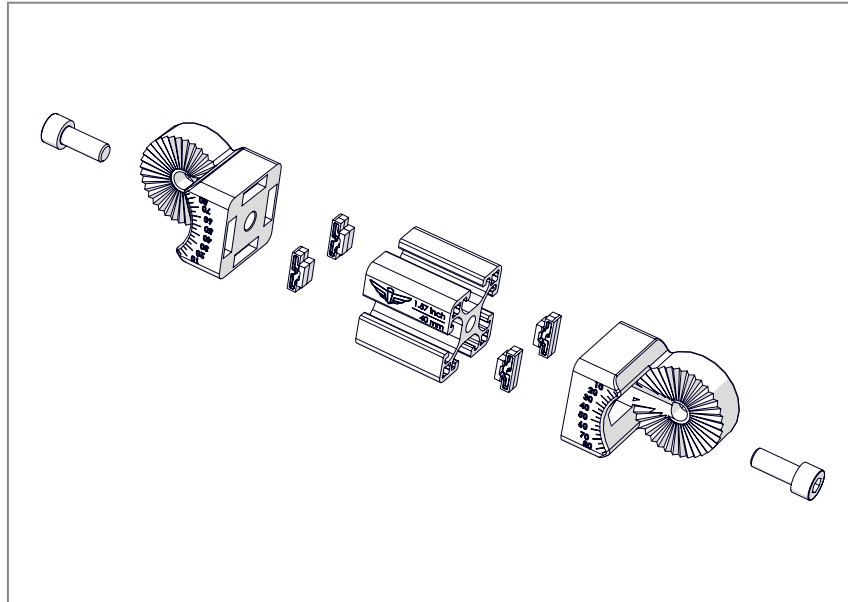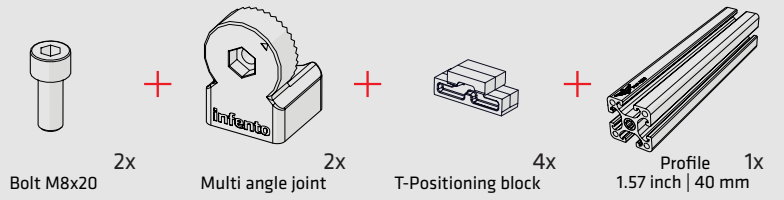




33

ride **BIKER**



2x

Bolt M8x35





2x

Knurled disc 2 stripes




2x

Locknut M8


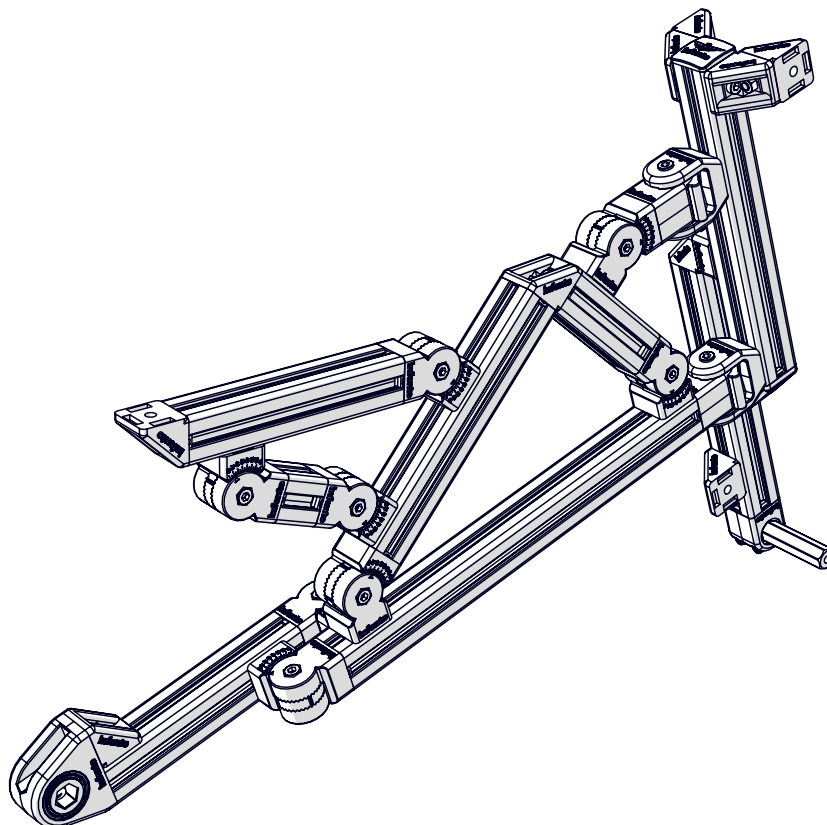
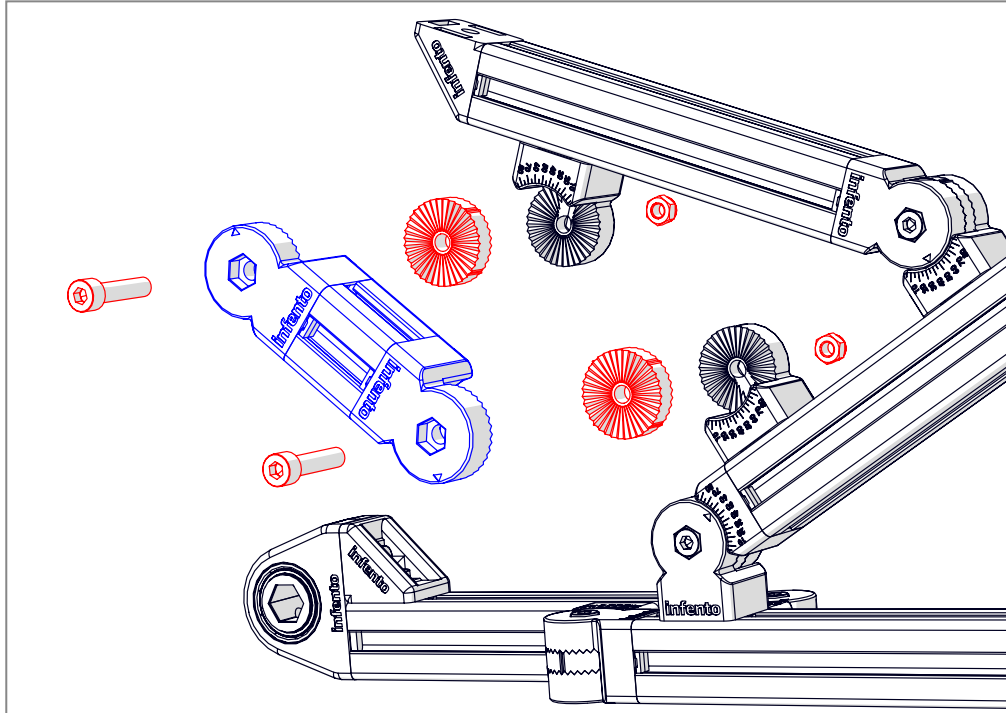




34

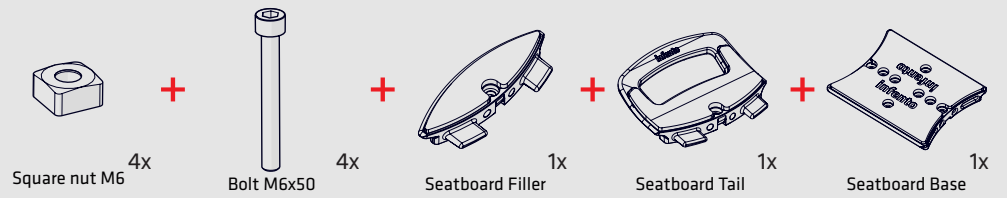





If you have this type of seat in your Kit, please skip to the next page. If not, follow the instructions below to construct your seatboard.

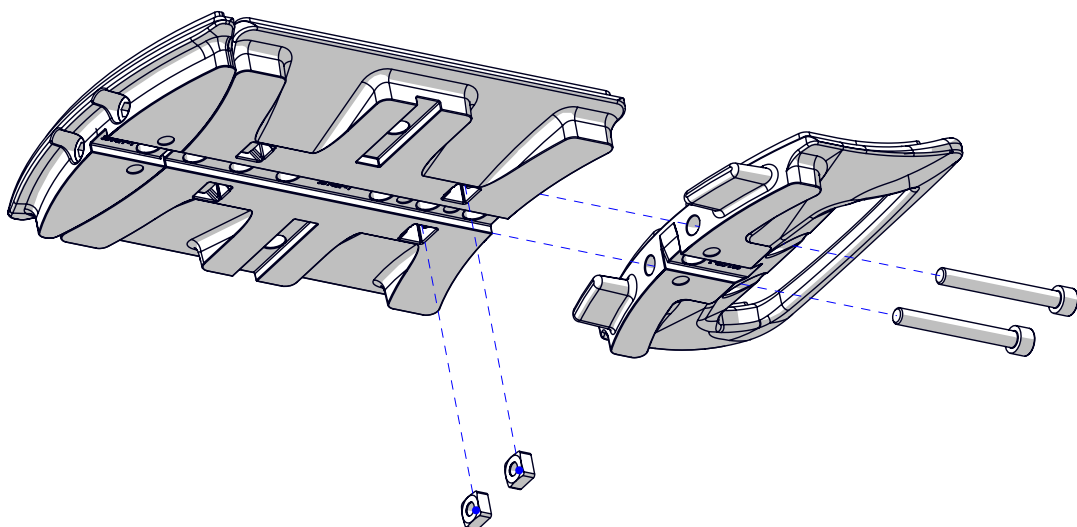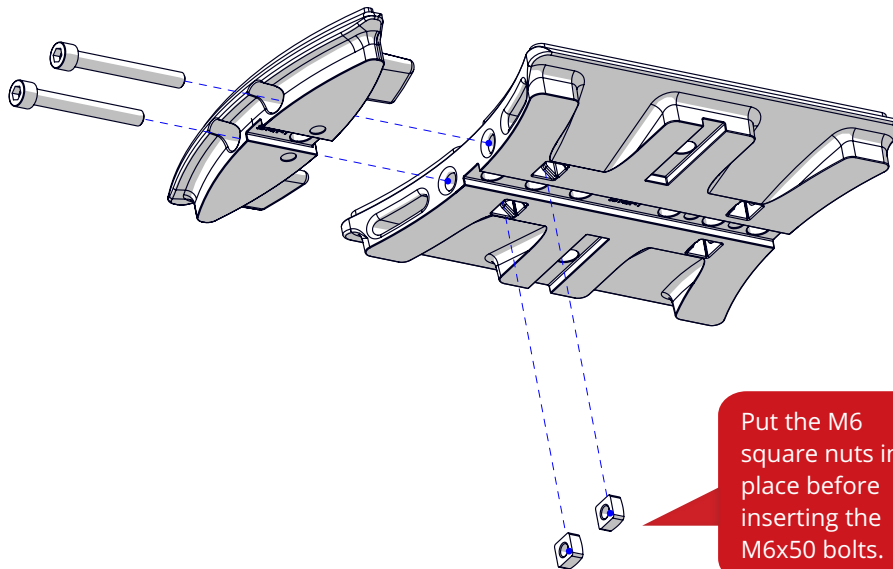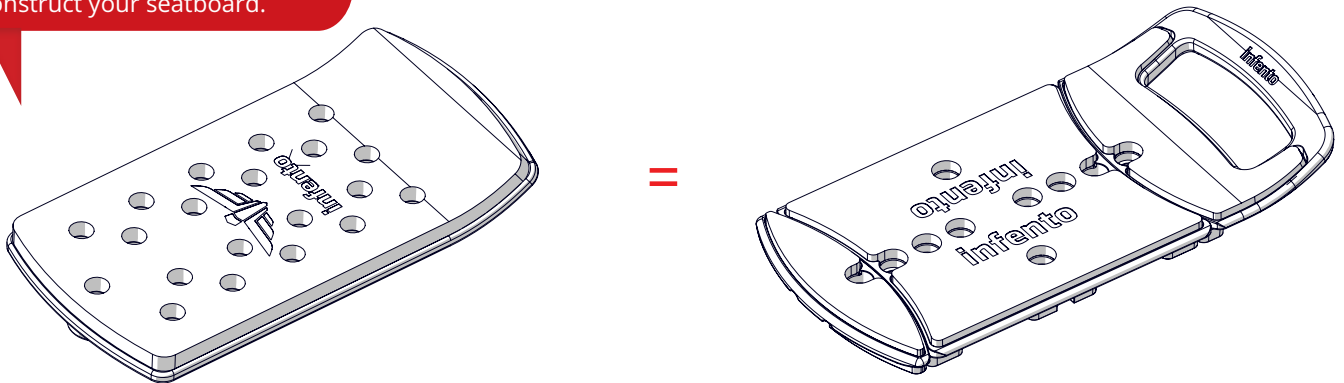



35






ride **BIKER**

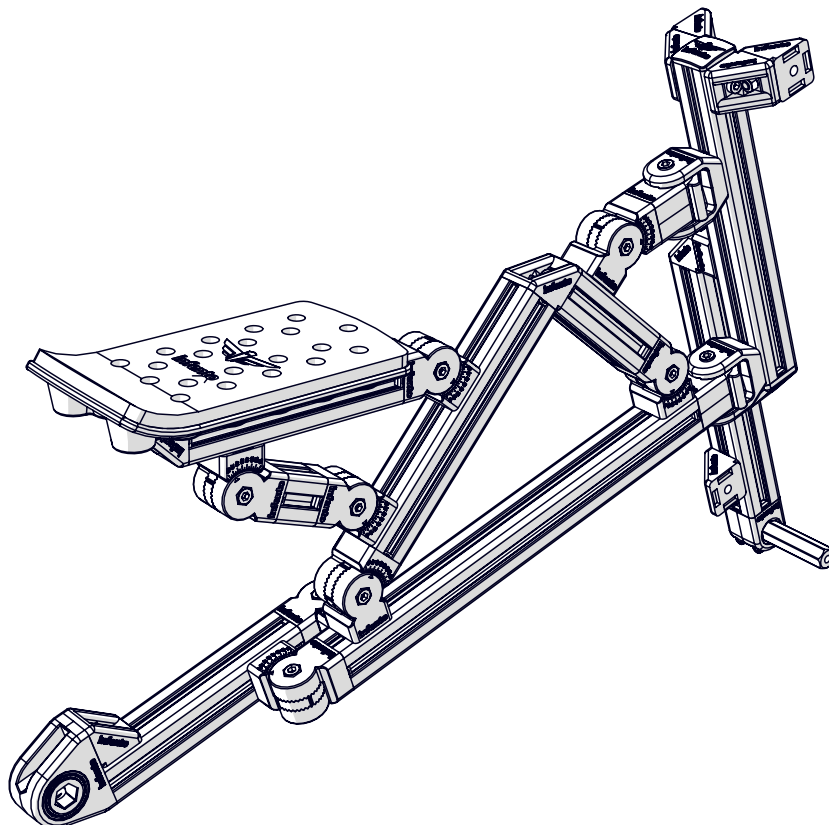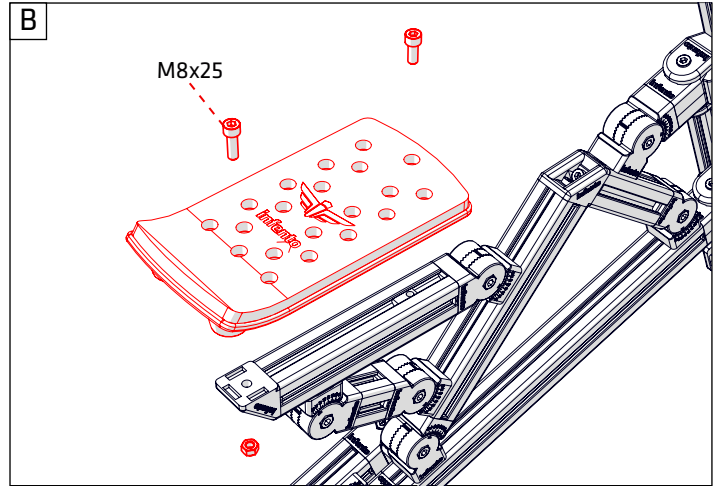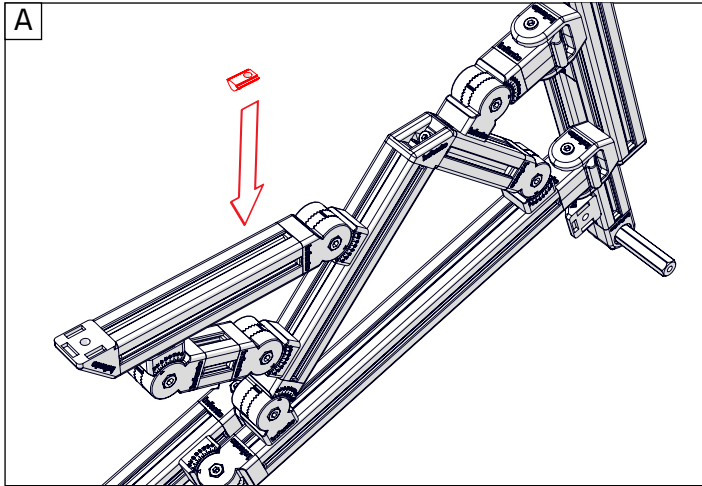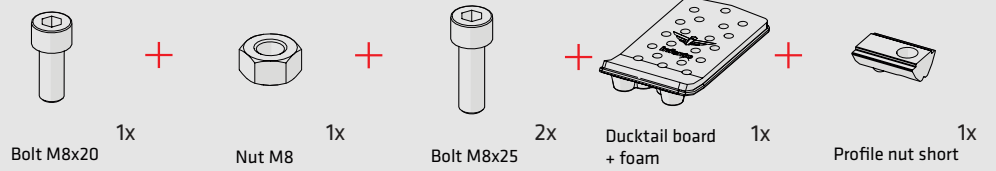



36





ride **BIKER**

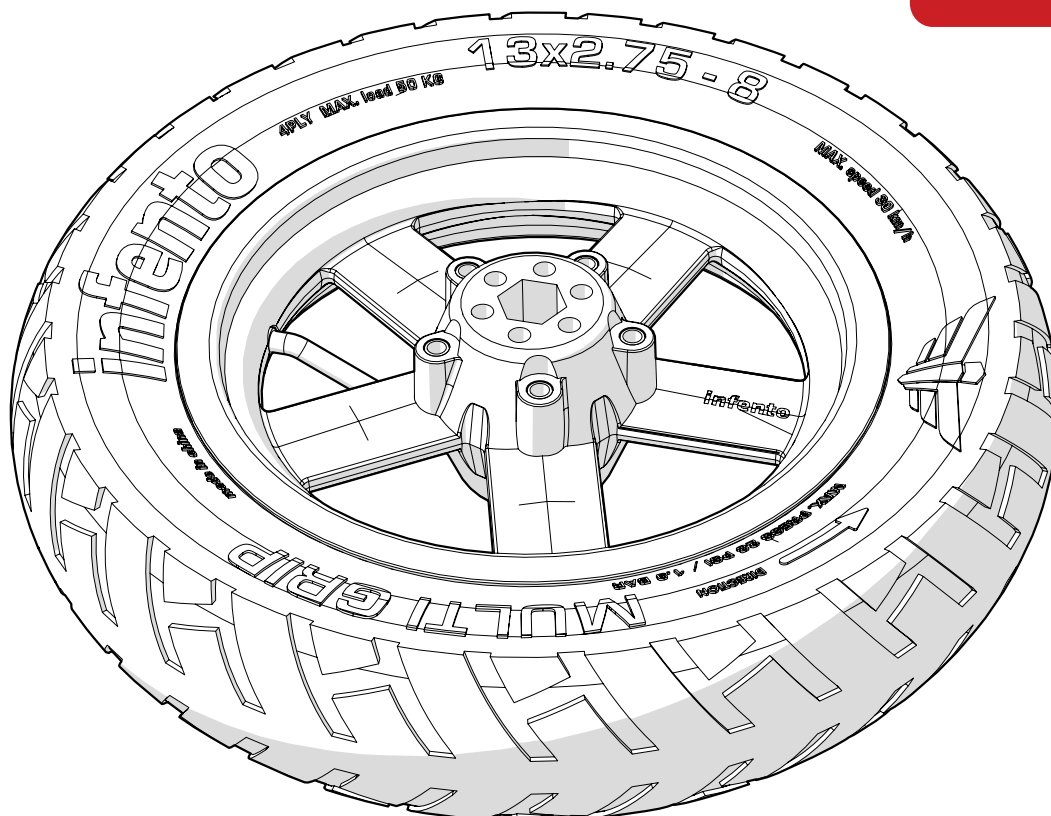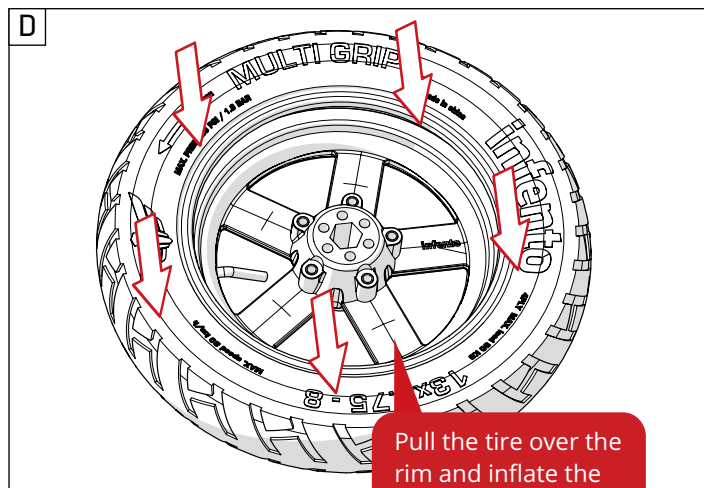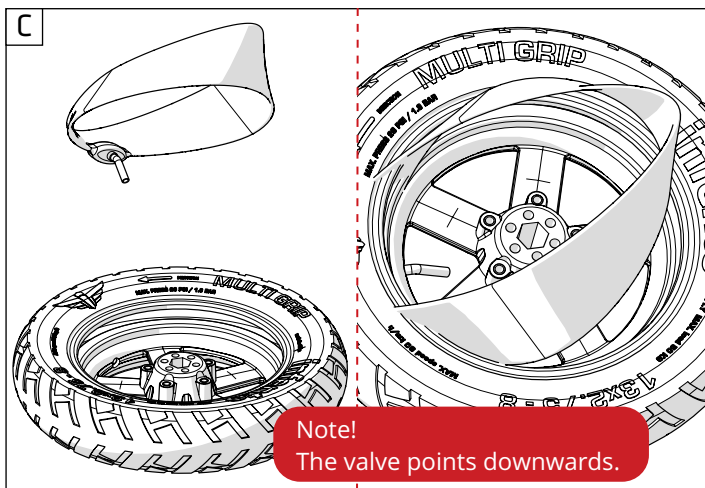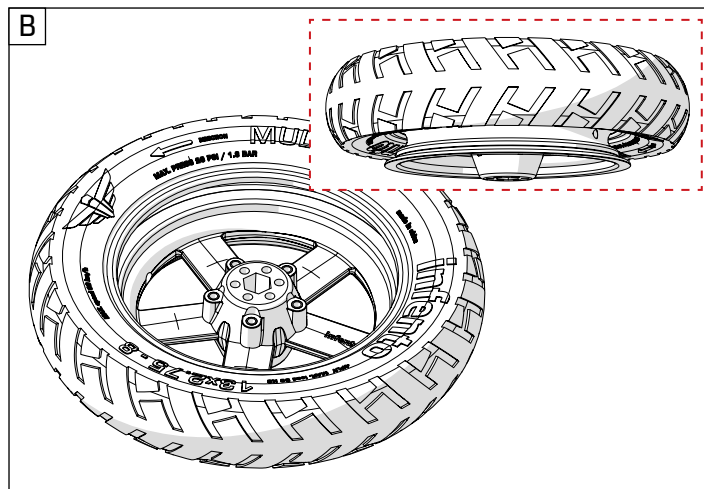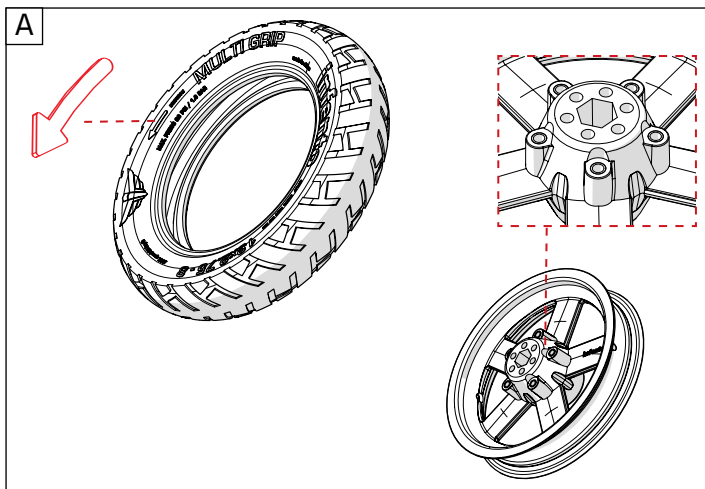



37


ride **BIKER**

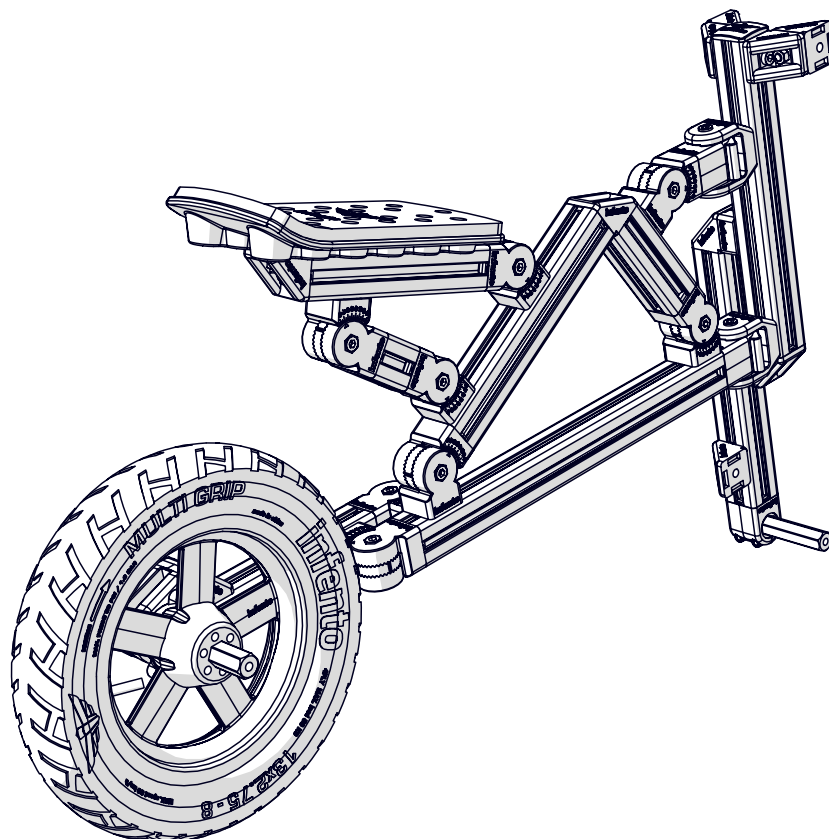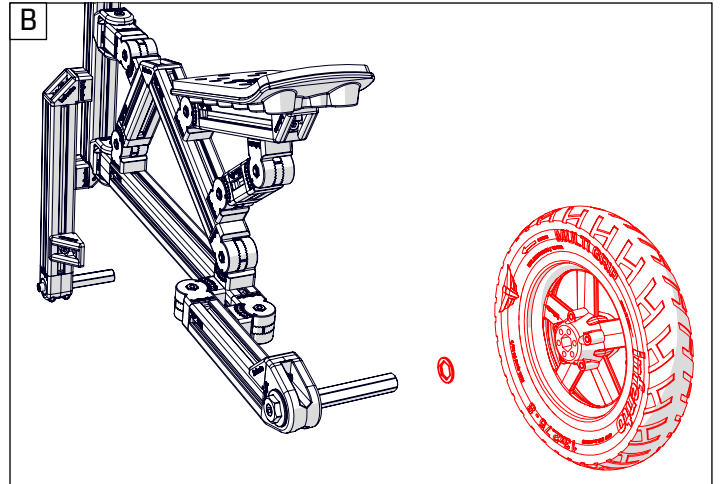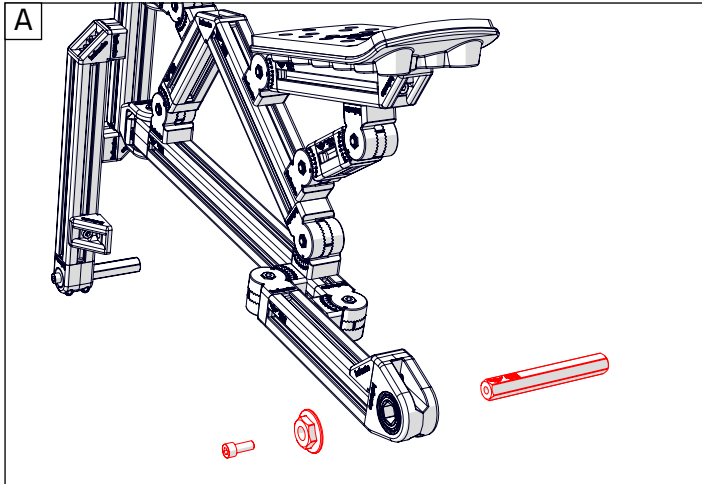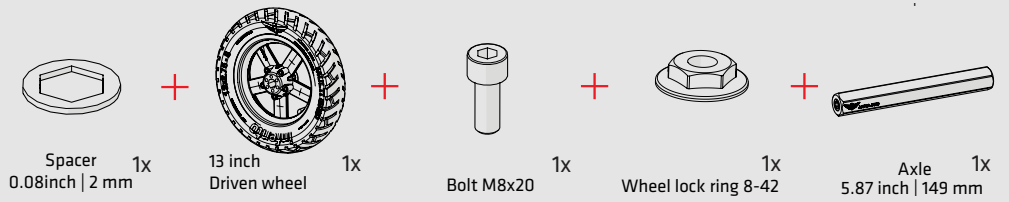




38

ride **BIKER**




Spacer 1x
0.2 inch | 5 mm

+



Spacer 1x
0.39 inch | 10 mm

+




Clamping part 1x
holes with M6 thread

+







Bolt M6x20 2x

+




Axle flange 1x

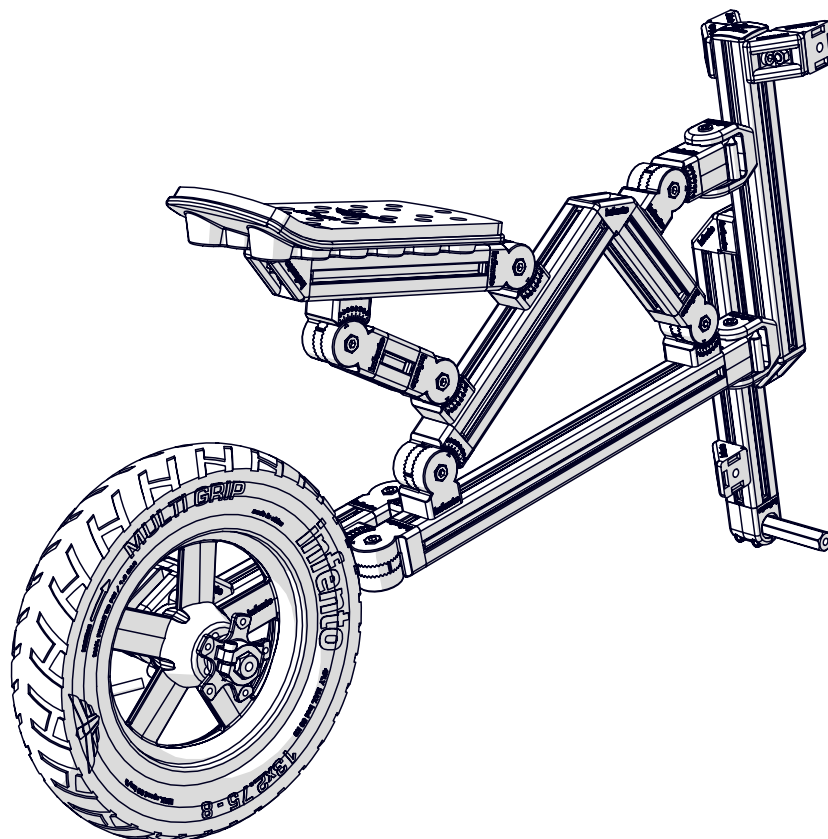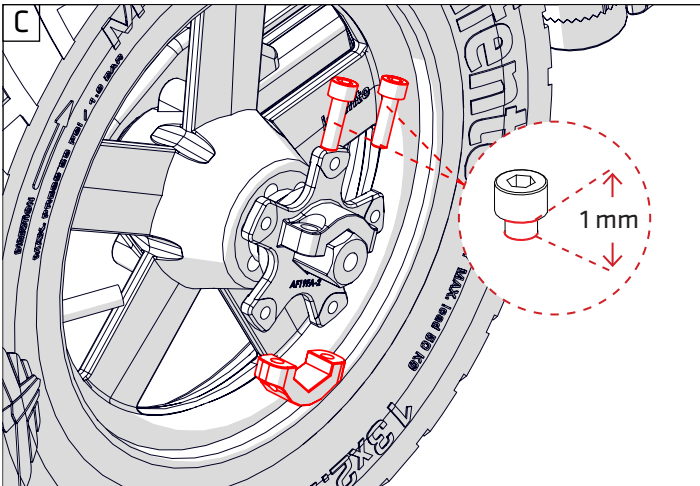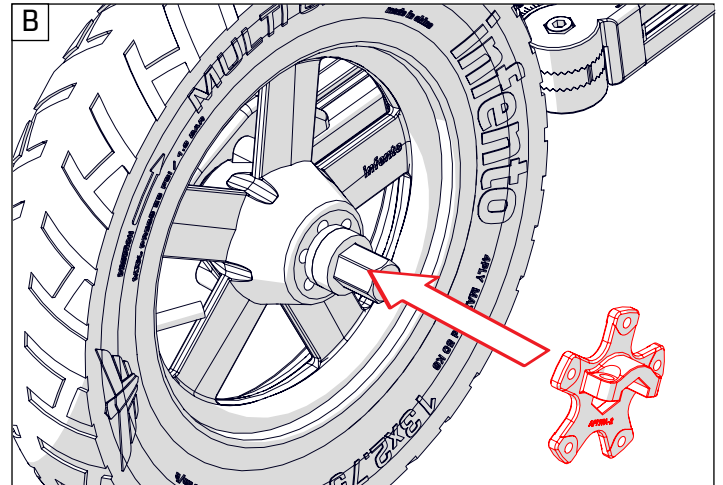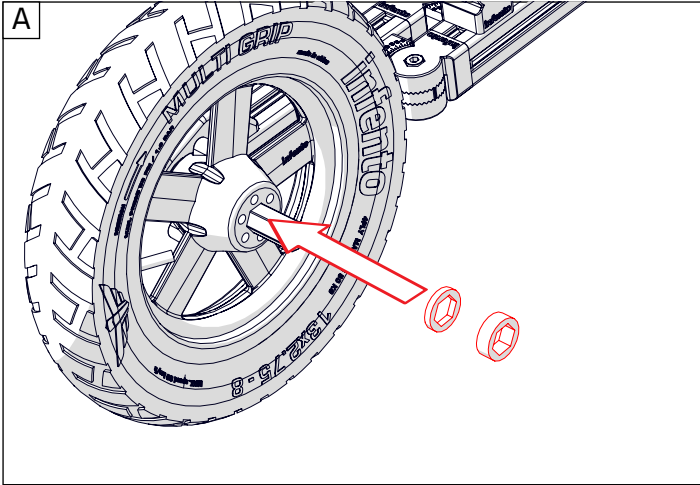



39

ride **BIKER**



Toothed belt pulley 26T 1x

+



Bolt M6x12 5x

+




Bolt M8x20 1x

+








Washer M8-24 1x

+




Spacer 0.2 inch | 5 mm 1x

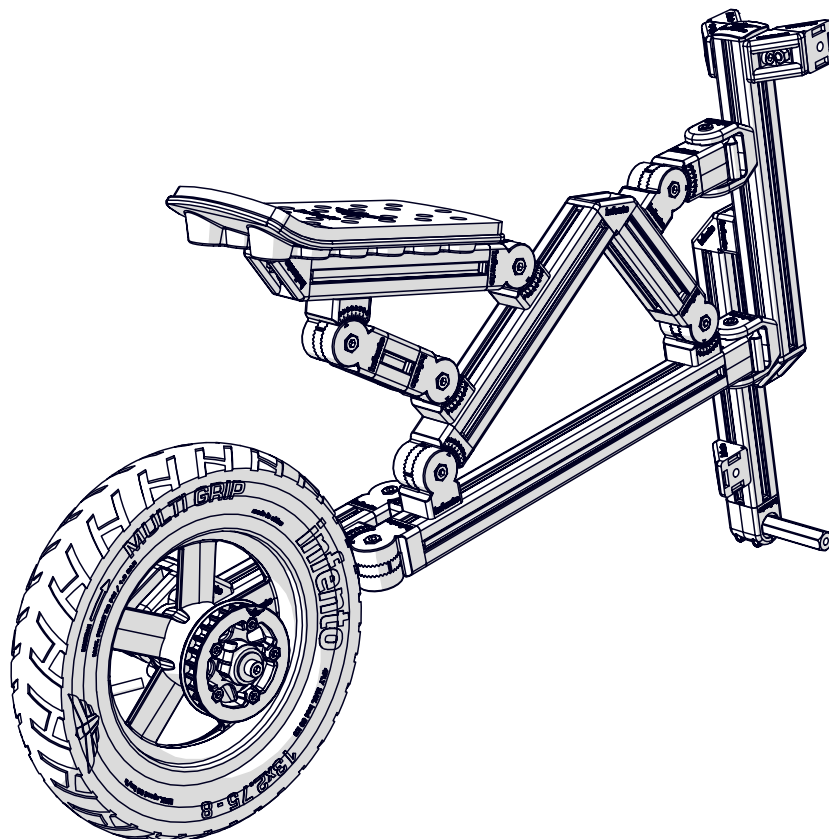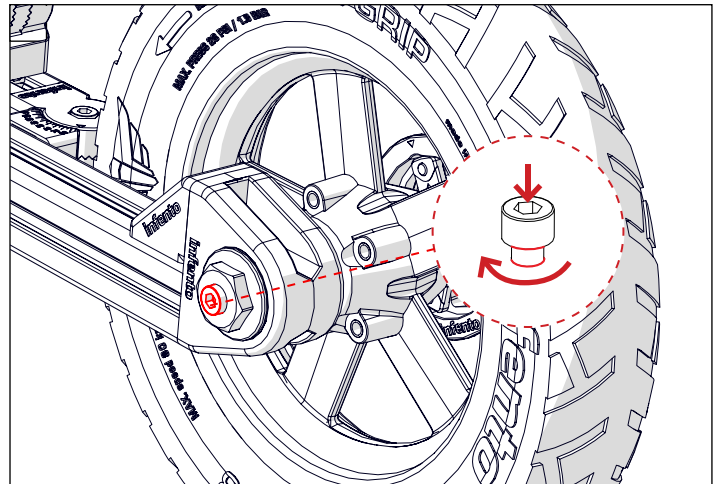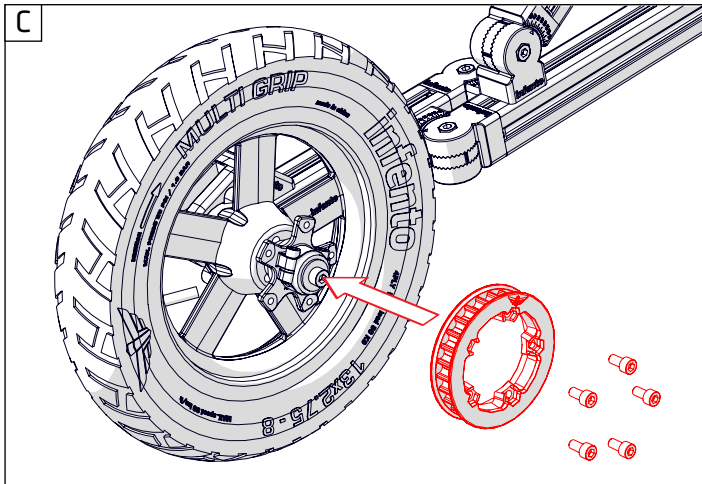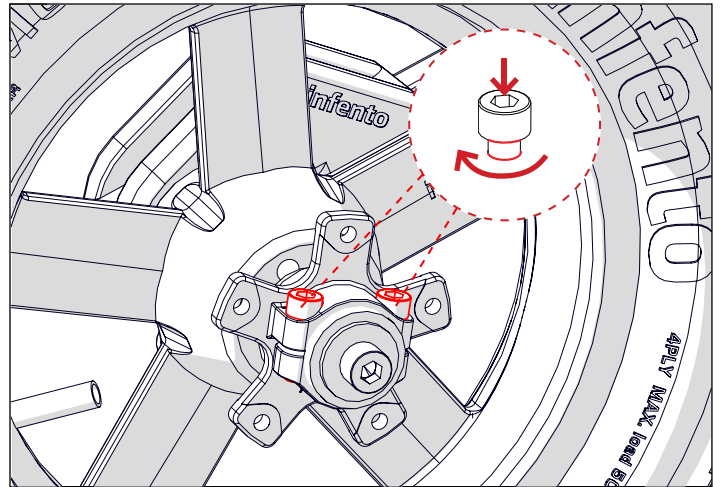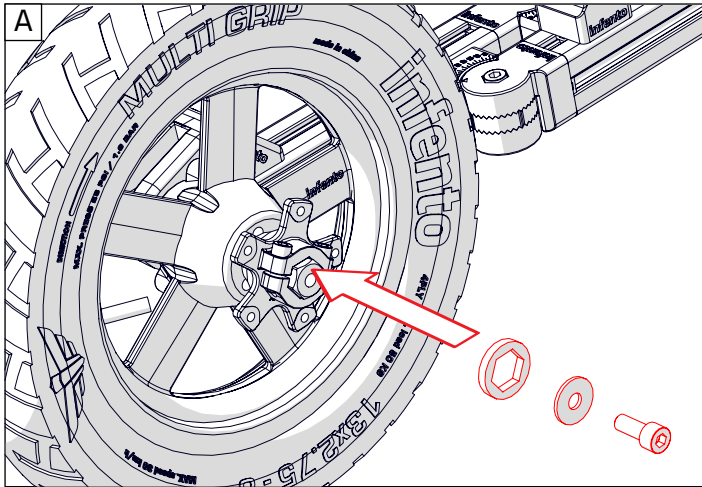



40

ride **BIKER**




Brake caliper
1x



Conical spring
washer M6-10
2x




Bolt M6x16
2x





Brake caliper holder
1x

A

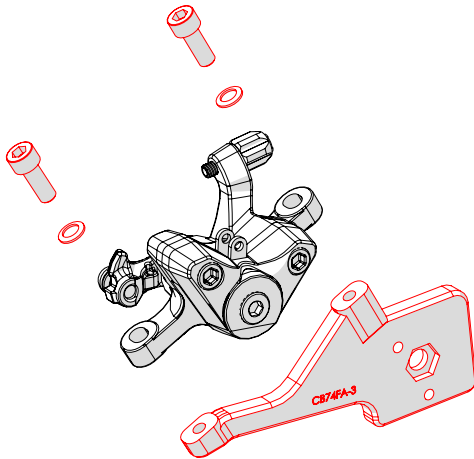





B

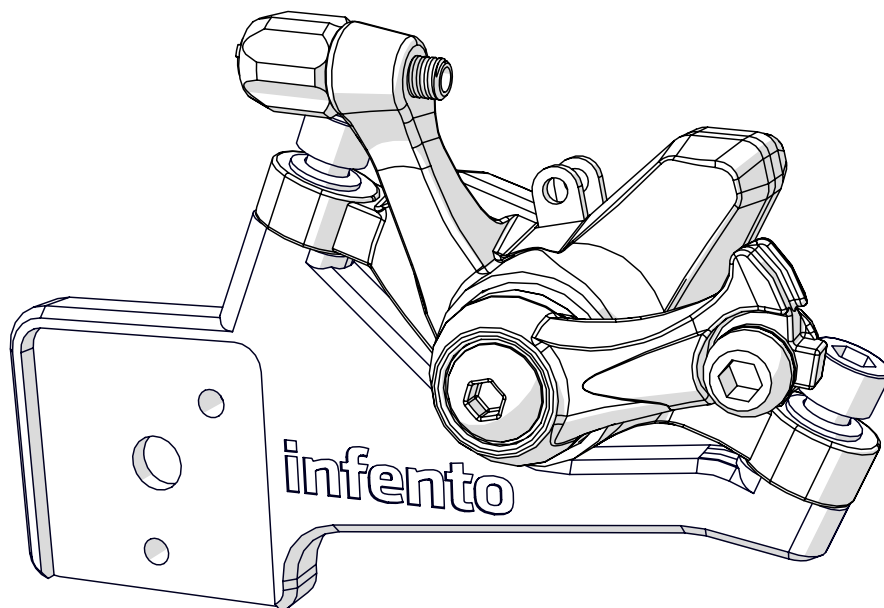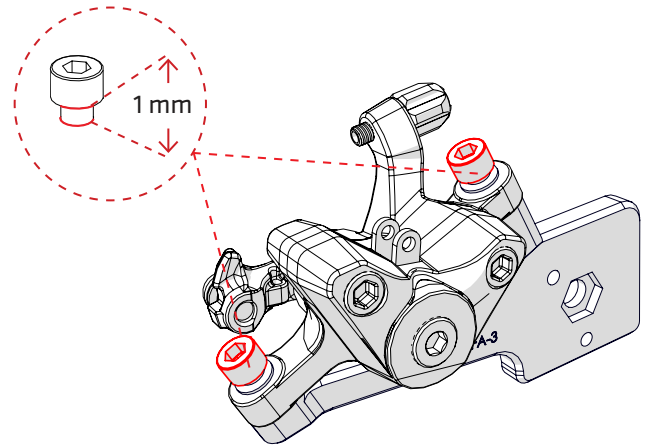



41





ride **BIKER**

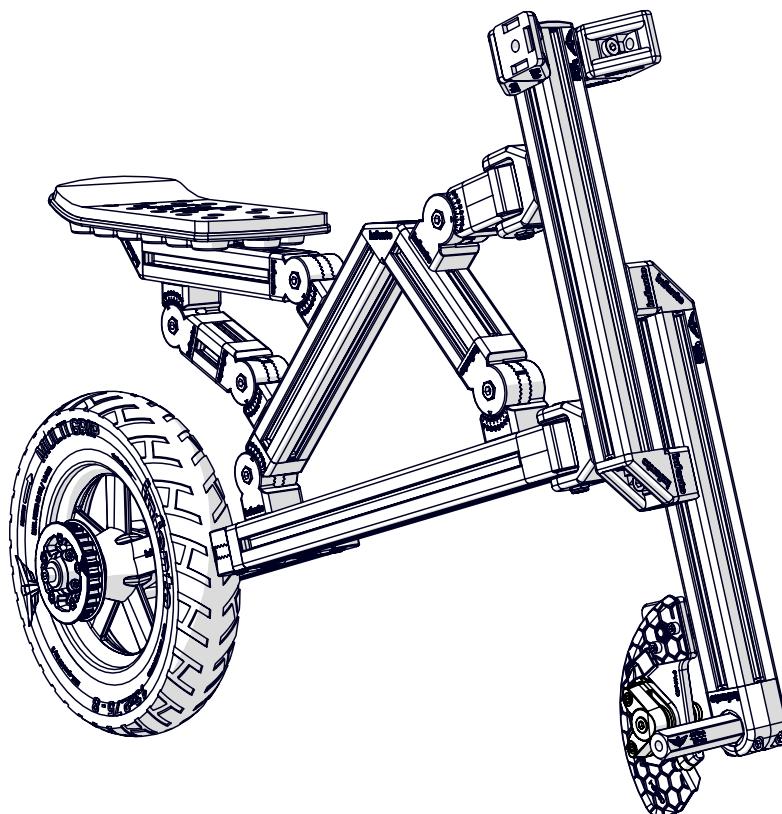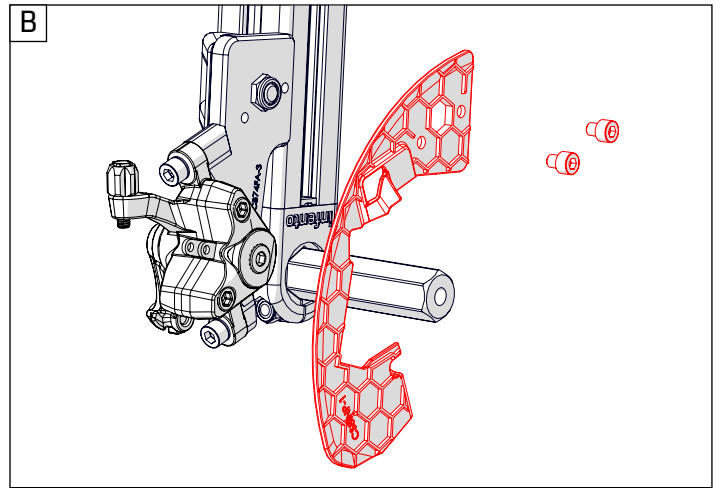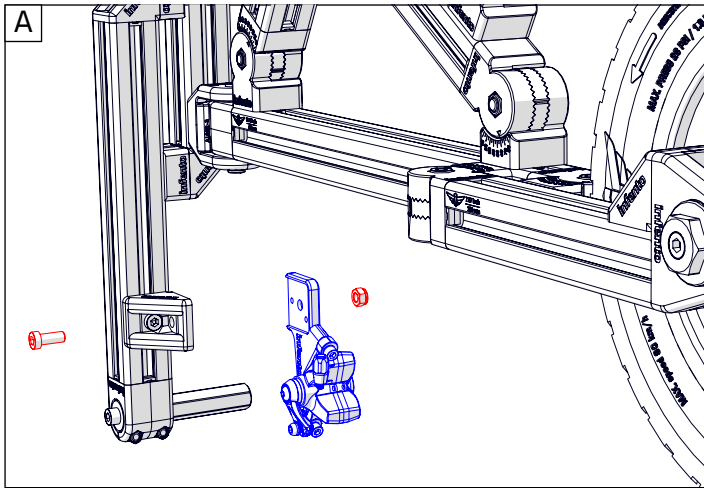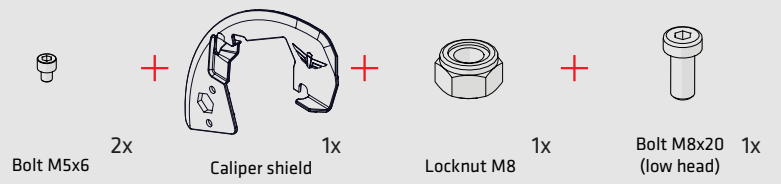



42


ride **BIKER**

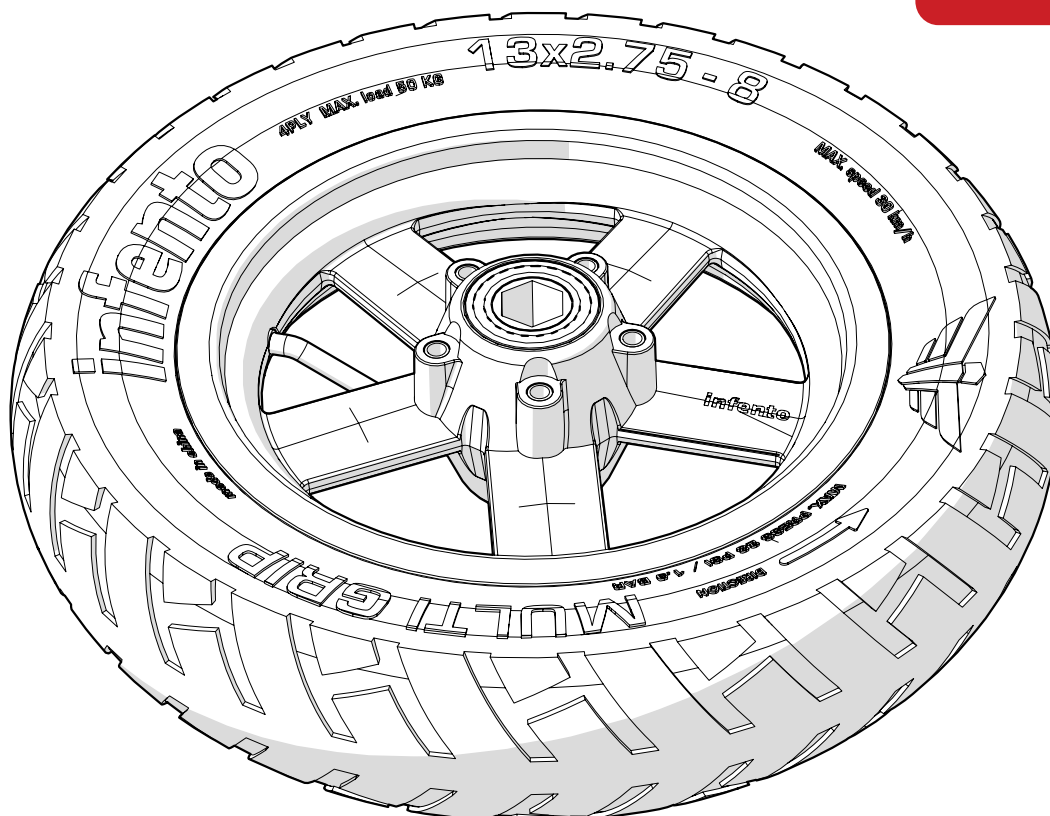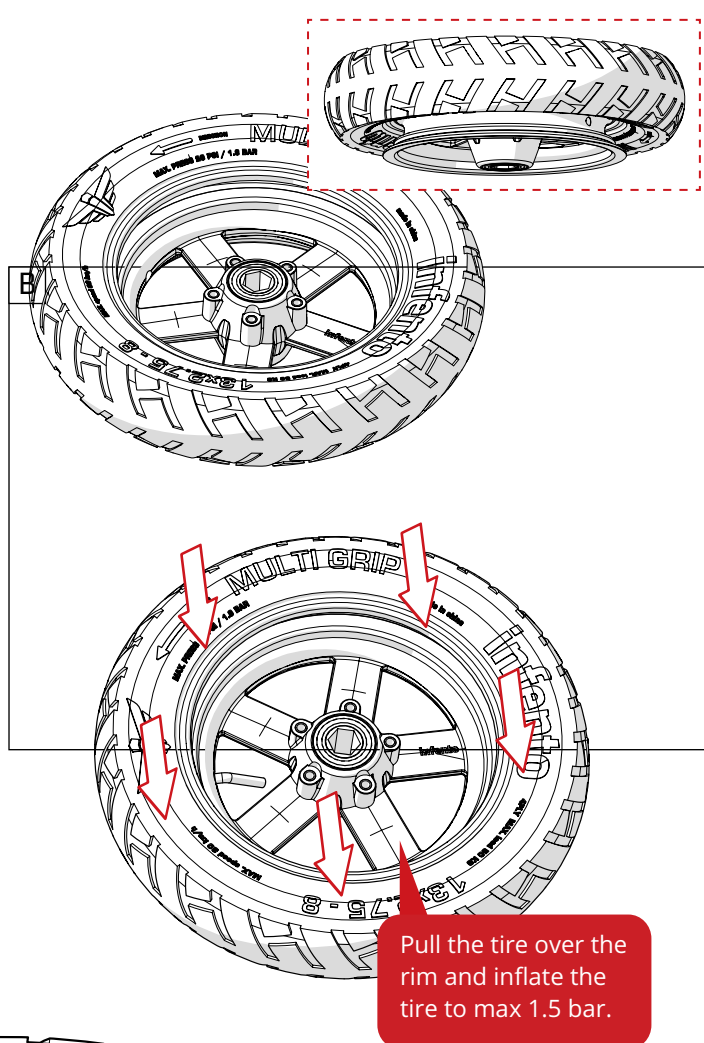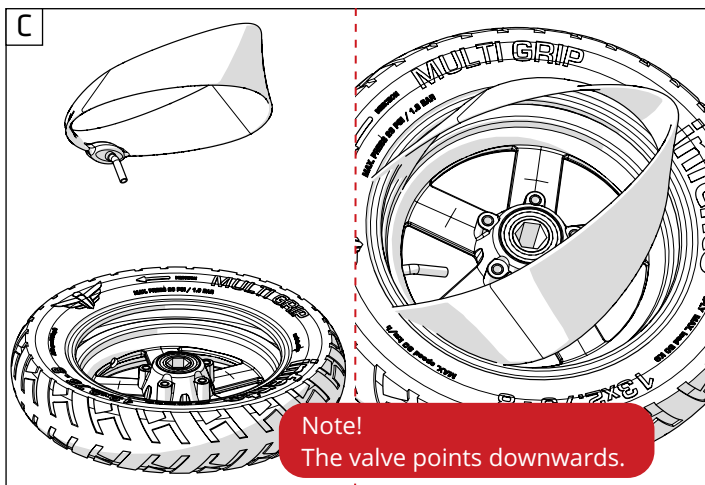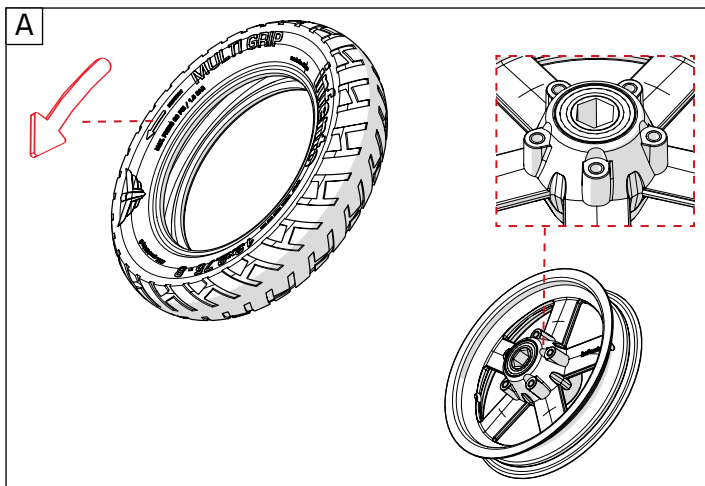




43

ride **BIKER**







Spacer
0.2 inch | 5 mm

+




Brake disc
1x

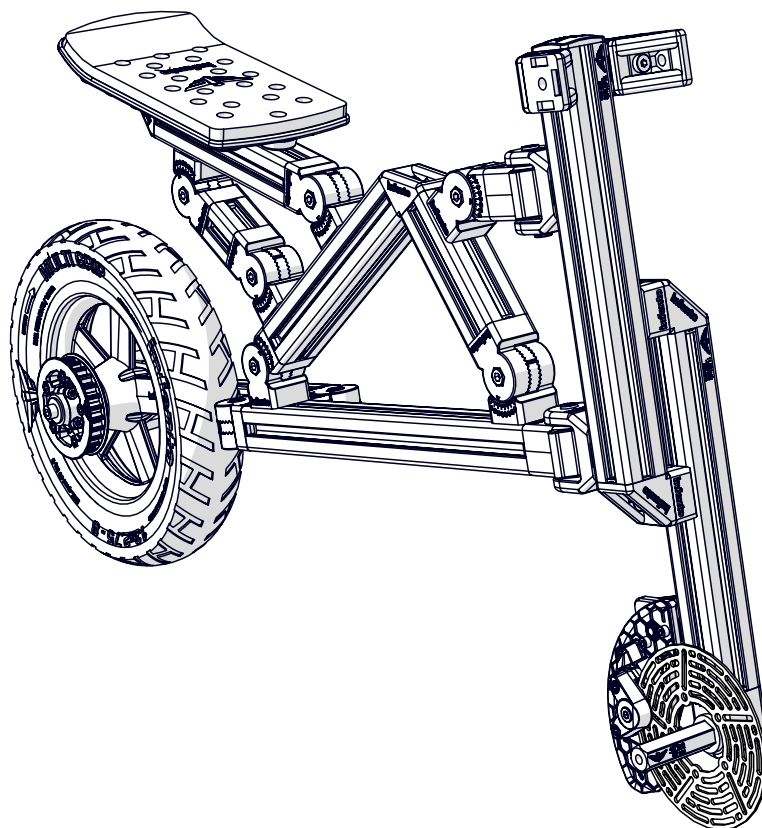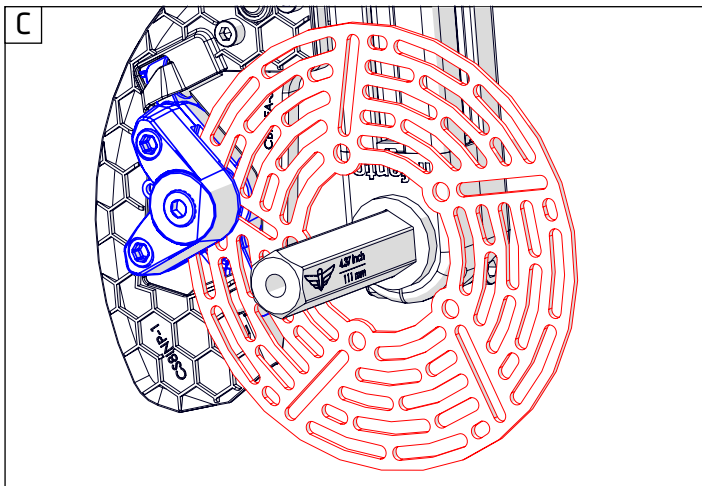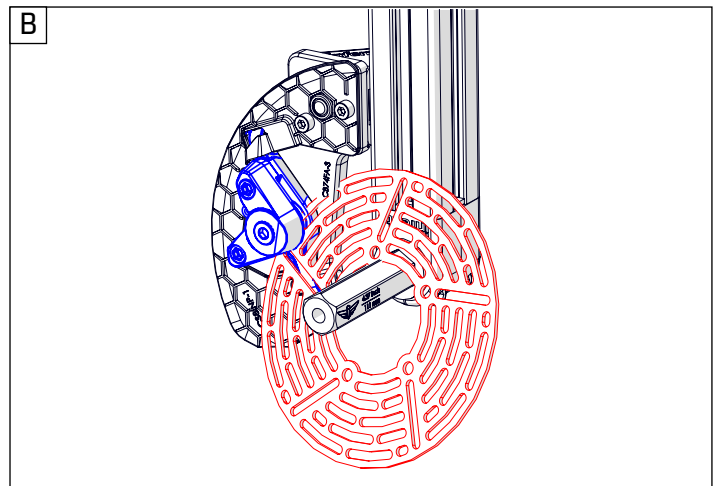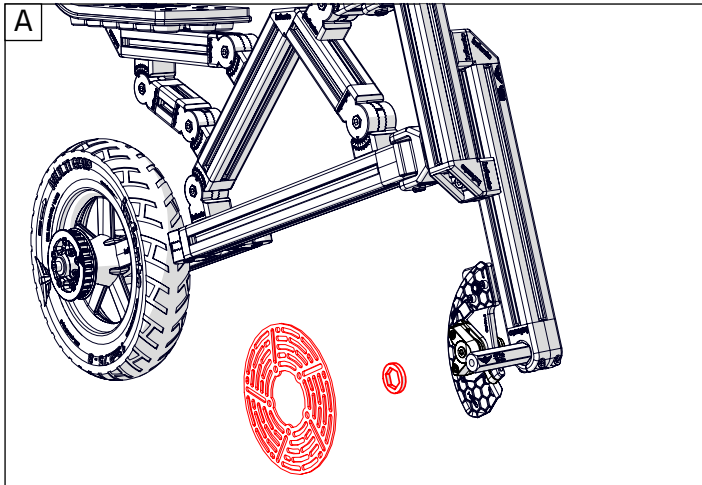







44

ride **BIKER**

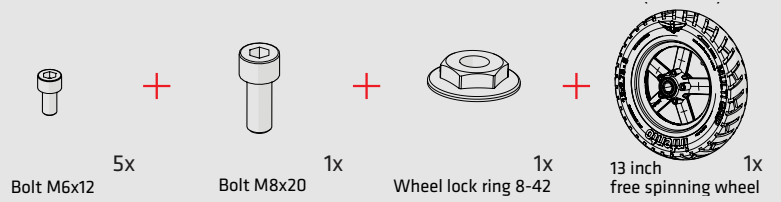






A

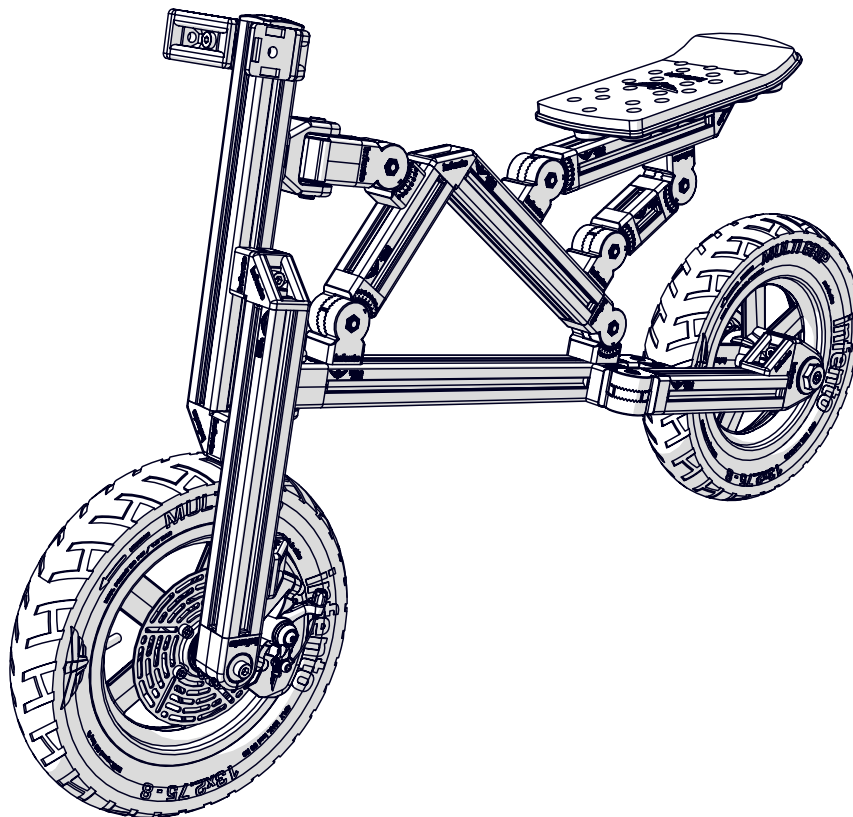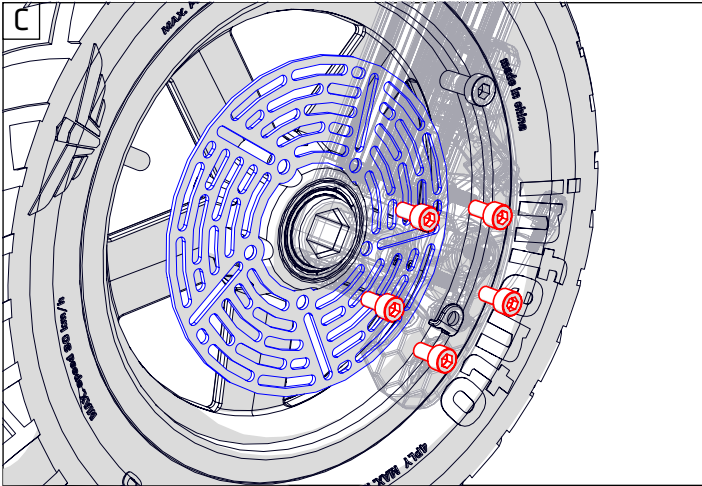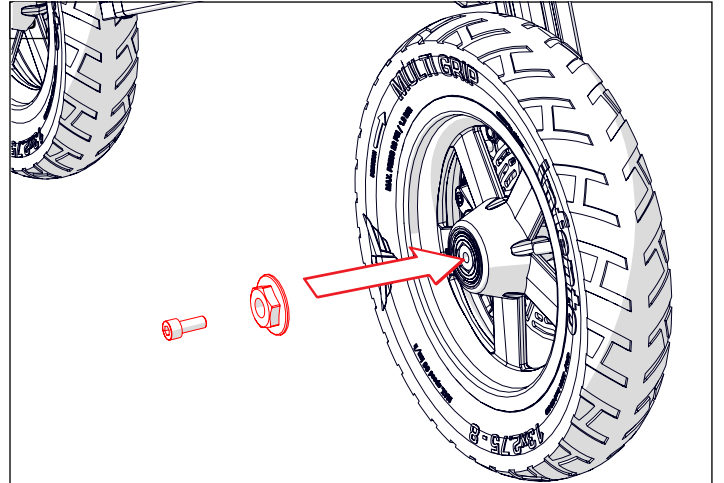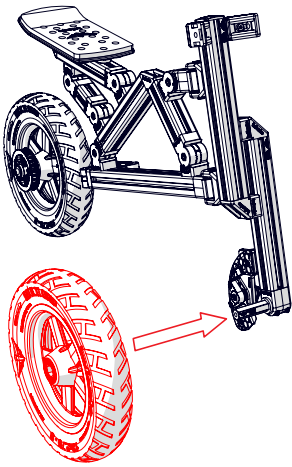



45





ride **BIKER**

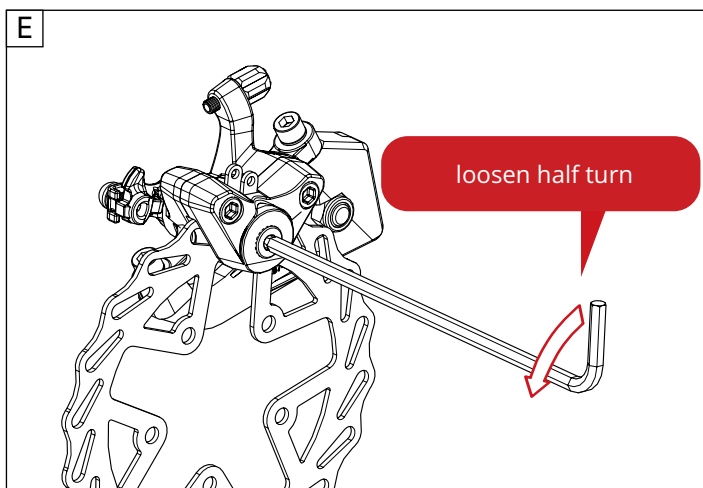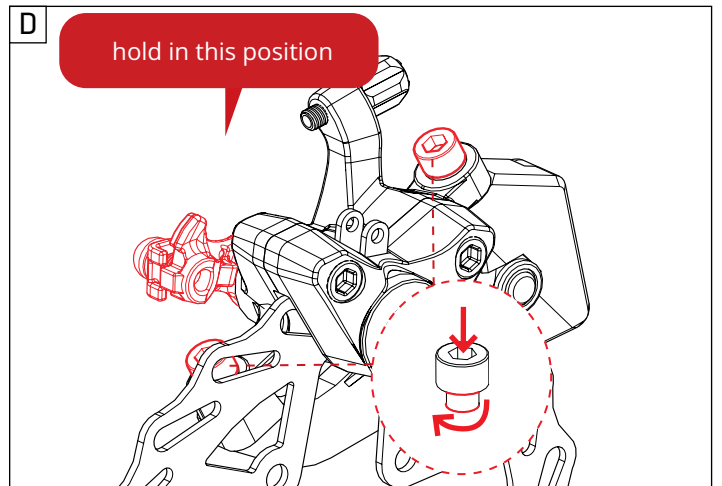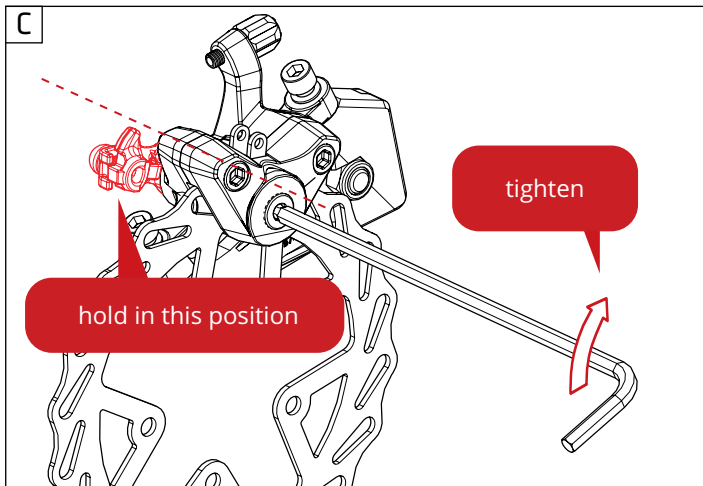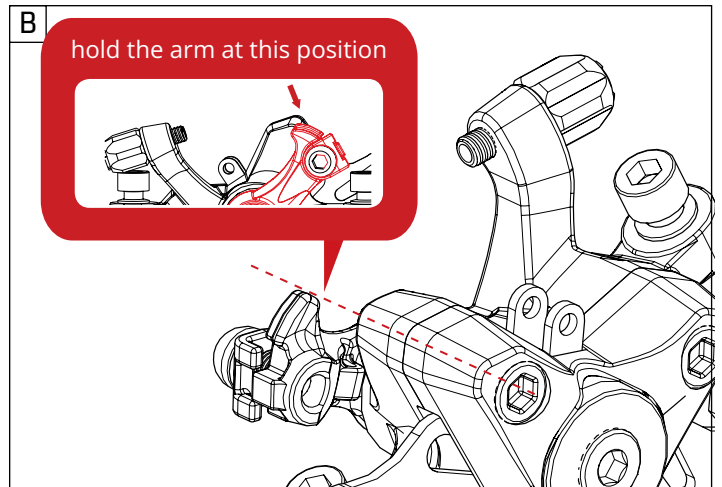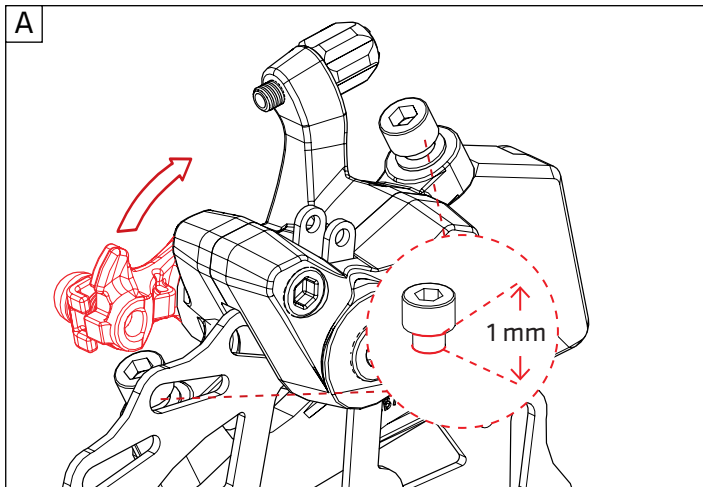



46


ride **BIKER**

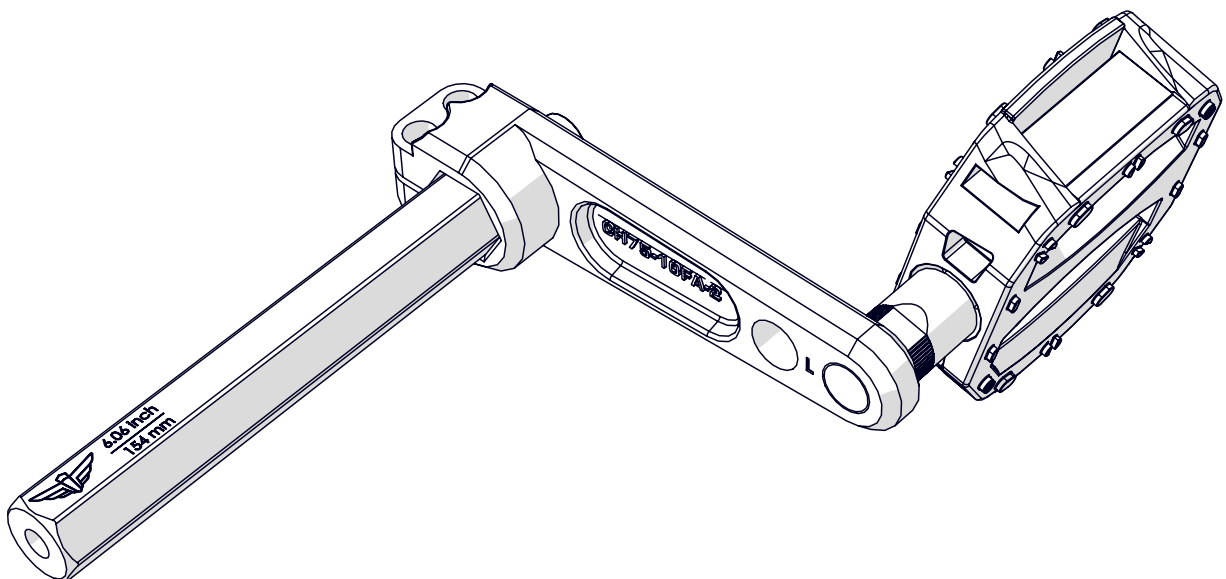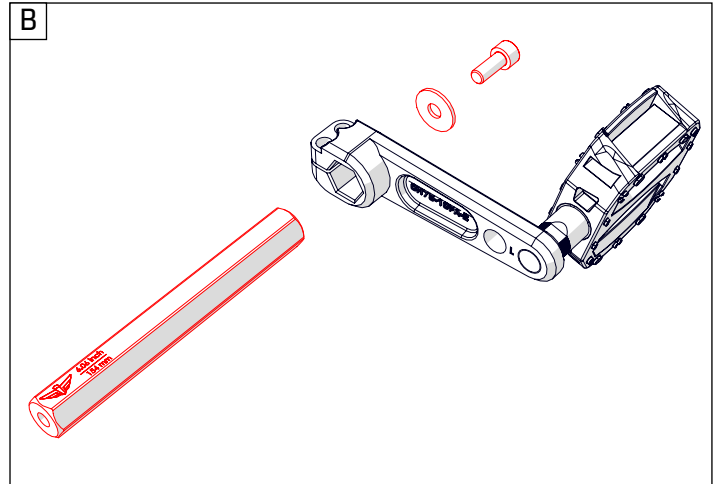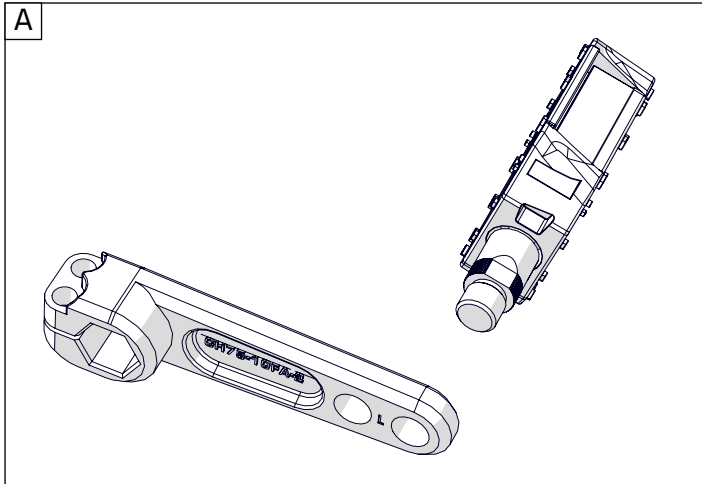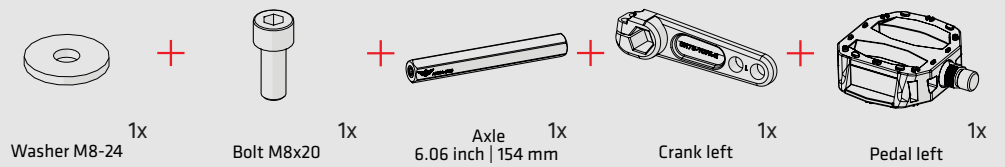




47

ride **BIKER**




Spacer 1x
0.04inch | 1 mm

+




Spacer 3x
0.39 inch | 10 mm

+




Spacer 2x
0.2 inch | 5 mm

+





Bearingblock 1x
40x80_hexa 19

A

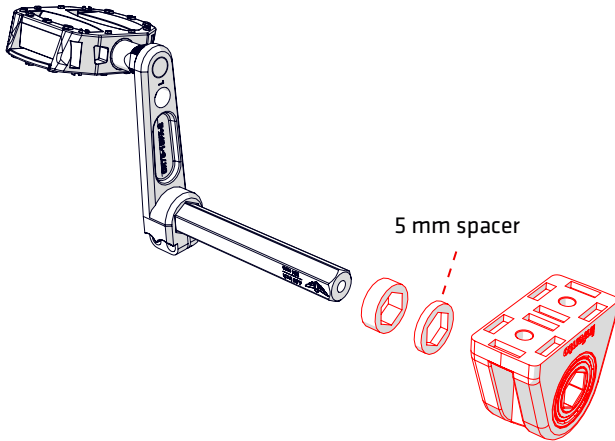



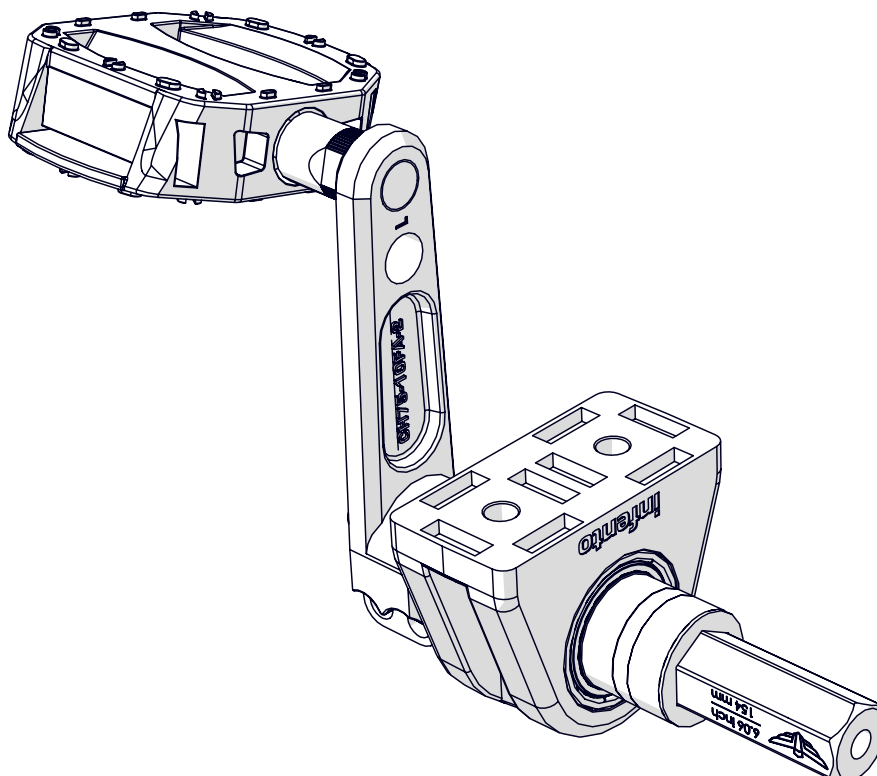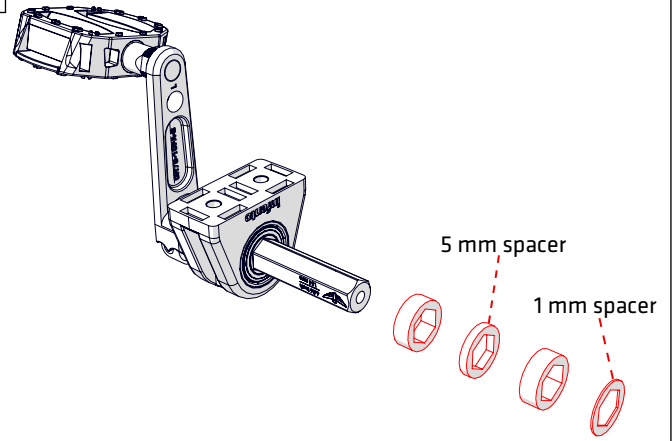


B






48


ride **BIKER**

- | | | | | | | | | | |
|--|----|--|----|---|----|--|----|--|----|
|  | + |  | + |  | + |  | + |  | |
| Bolt M6x20 | 2x | Clamping part
holes with M6 thread | 1x | Bolt M6x12 | 5x | Toothed
belt pulley 46T | 1x | Axle flange | 1x |



A

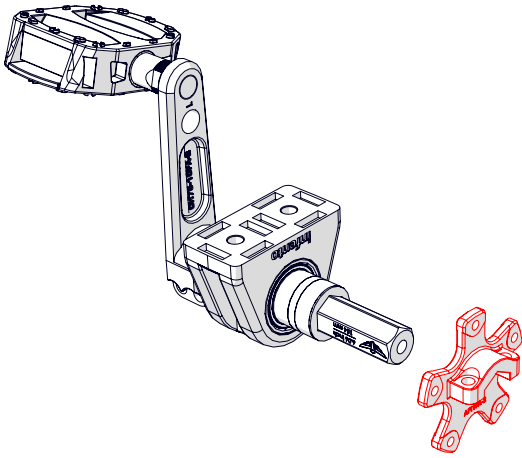

B

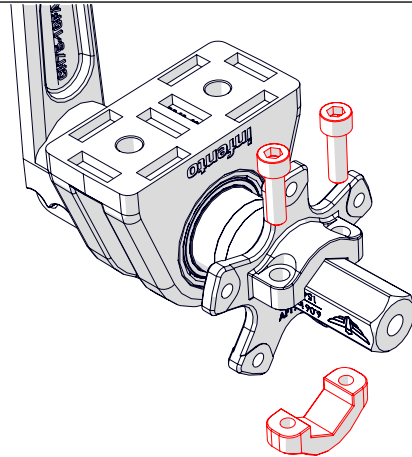


C

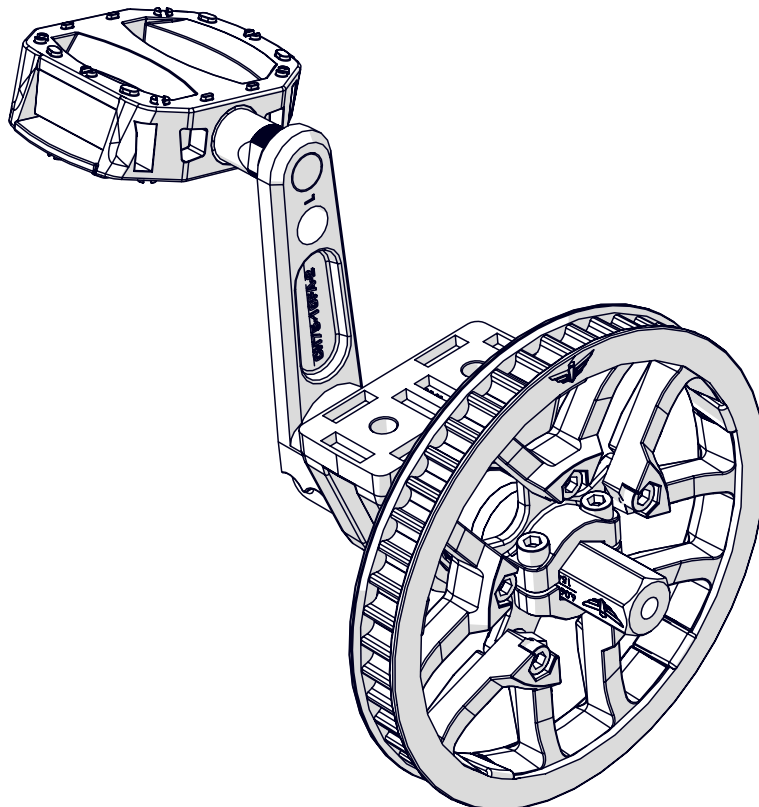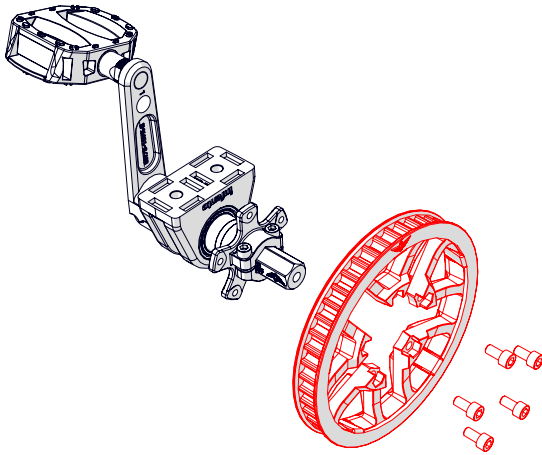




49

ride **BIKER**



Pedal right 1x

+



Crank right 1x

+




Washer M8-24 1x

+




Bolt M8x20 1x

+




Spacer 0.2 inch | 5 mm 1x

+





Spacer 0.04 inch | 1 mm 1x

A

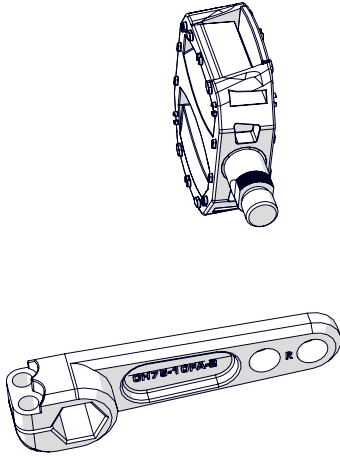

B

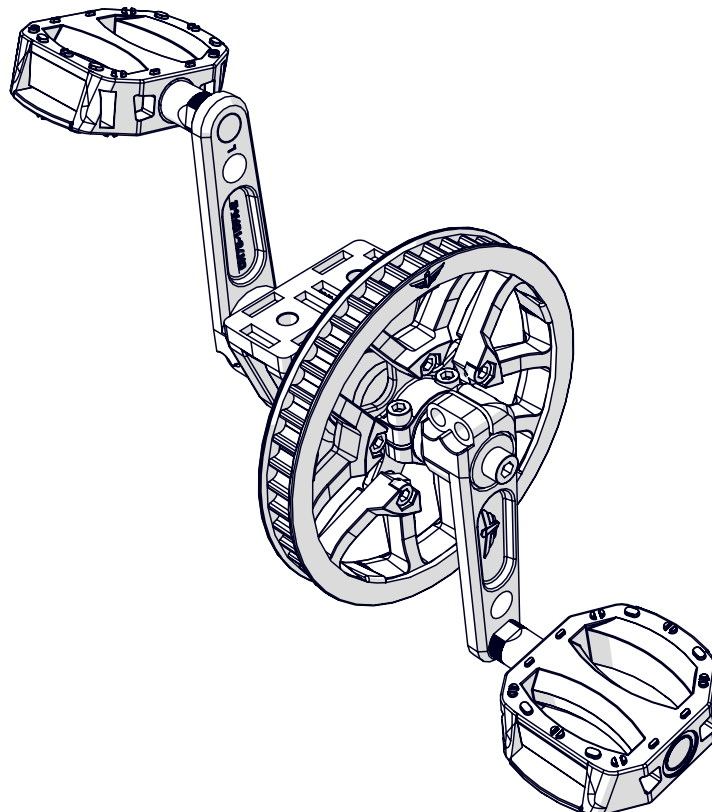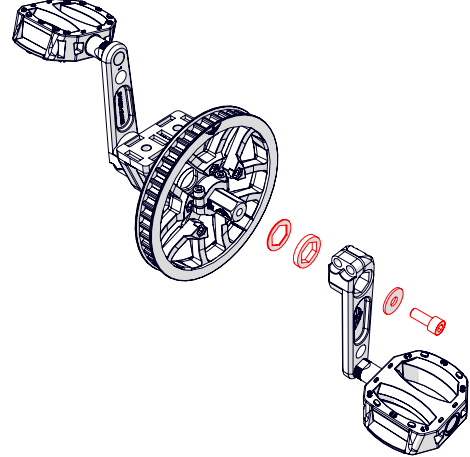






50

ride *BIKER*



Bolt M8x20 4x

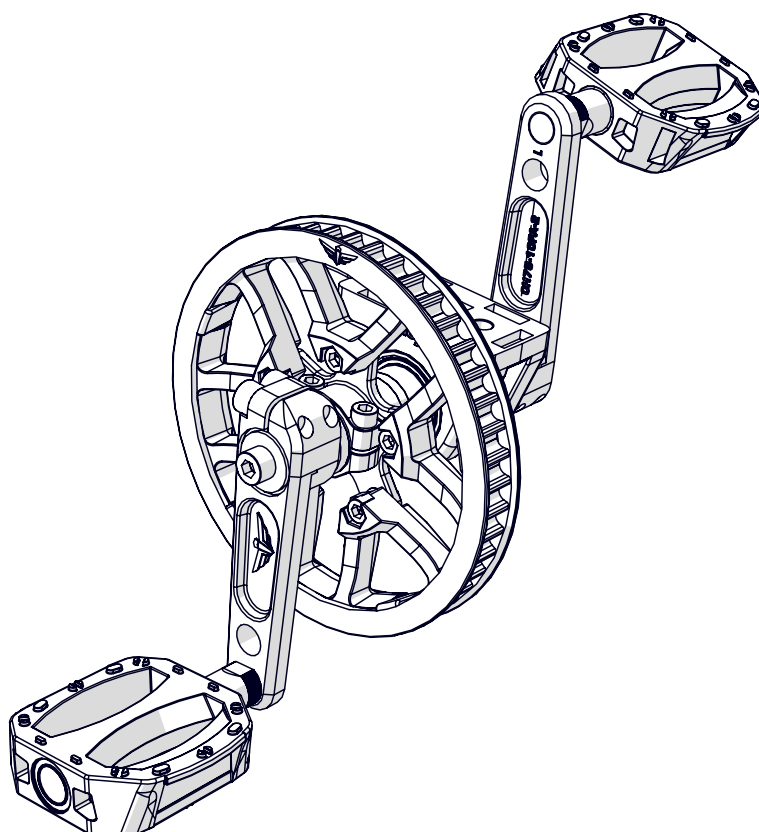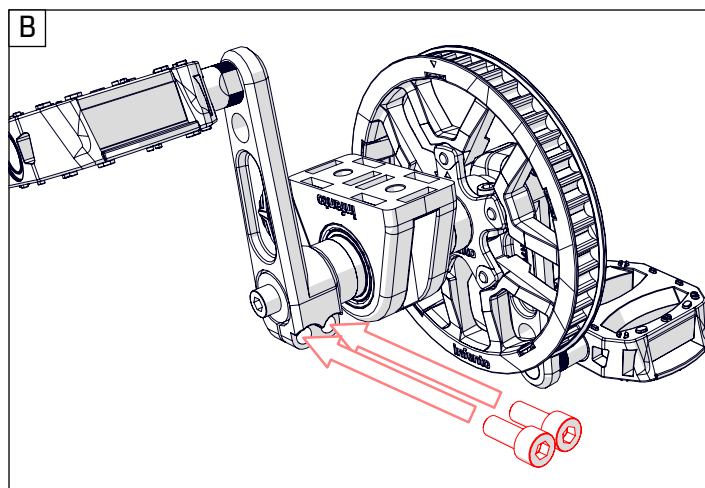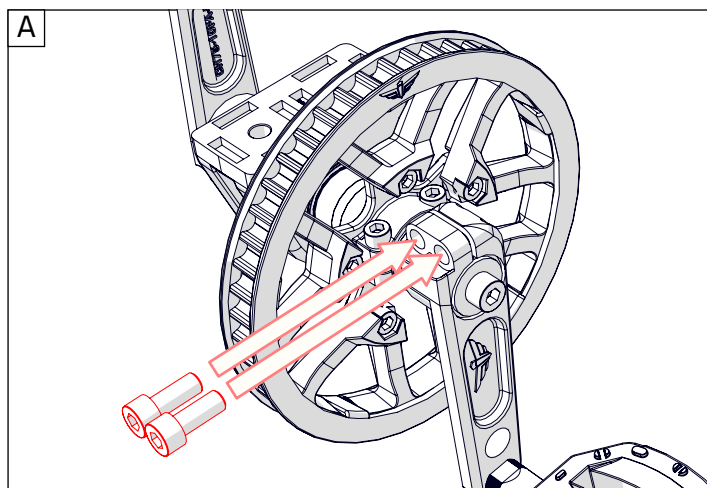



51

ride **BIKER**



Bolt M8x20

2x






T-Positioning block

2x



Profile nut short

2x

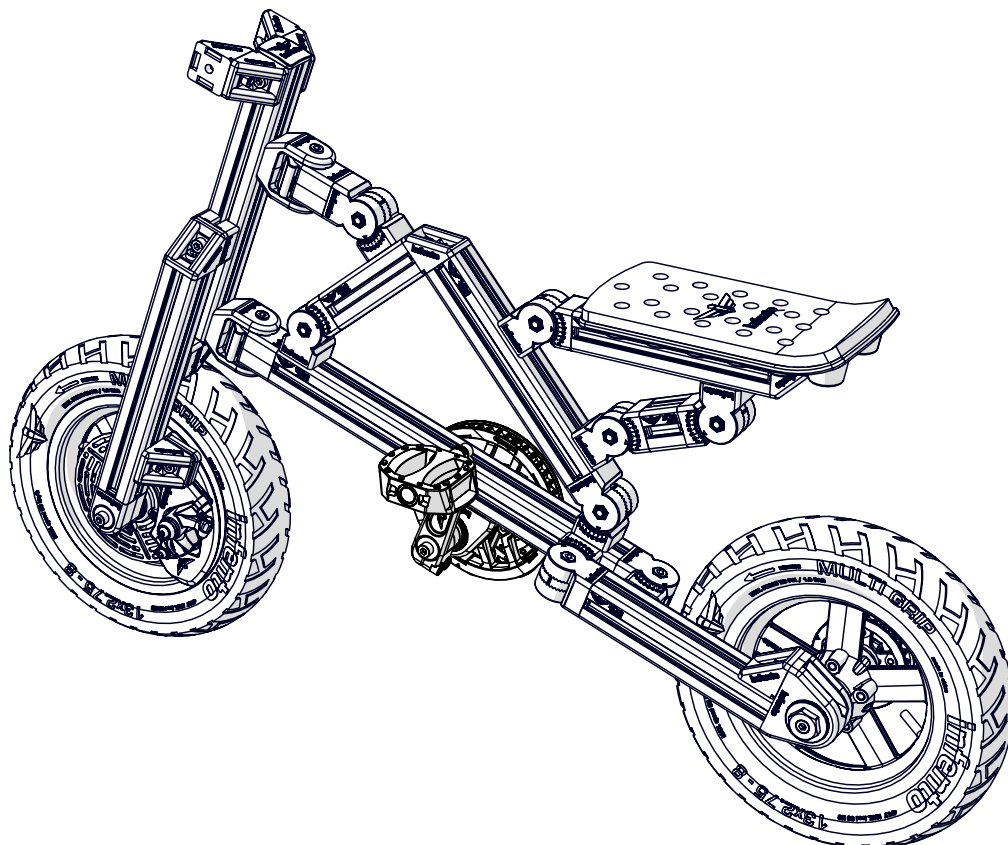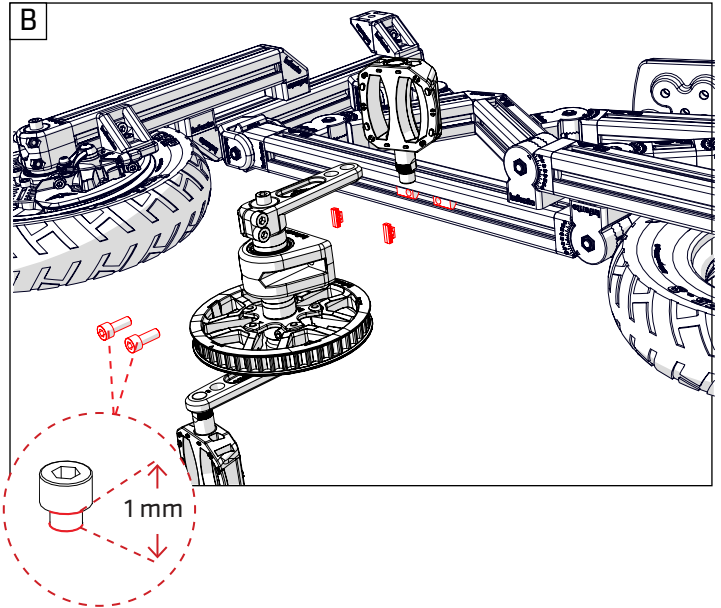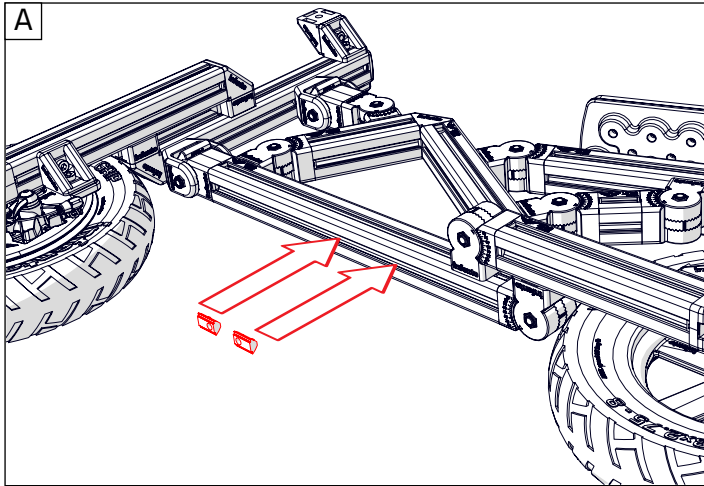





52

ride **BIKER**





Toothed belt 118T 1x

A

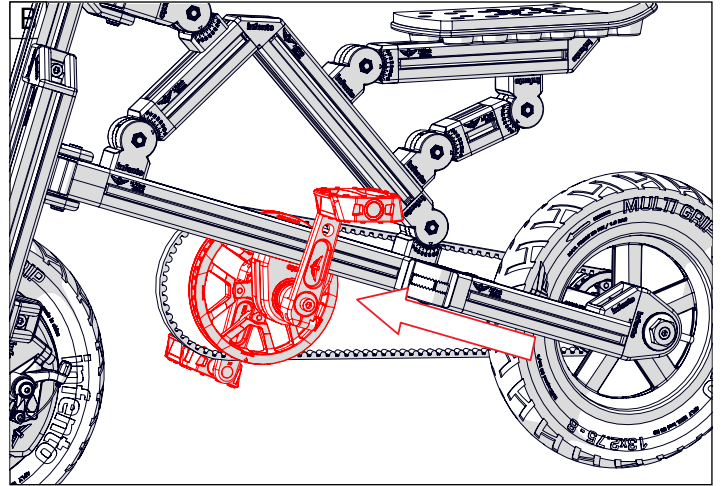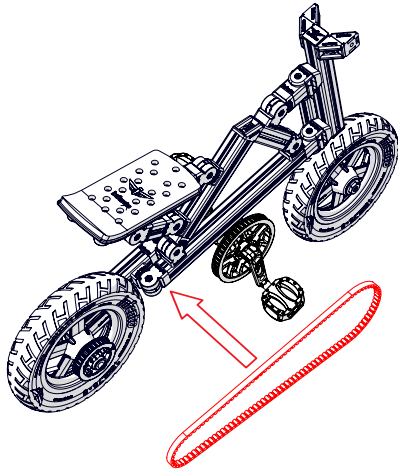




C

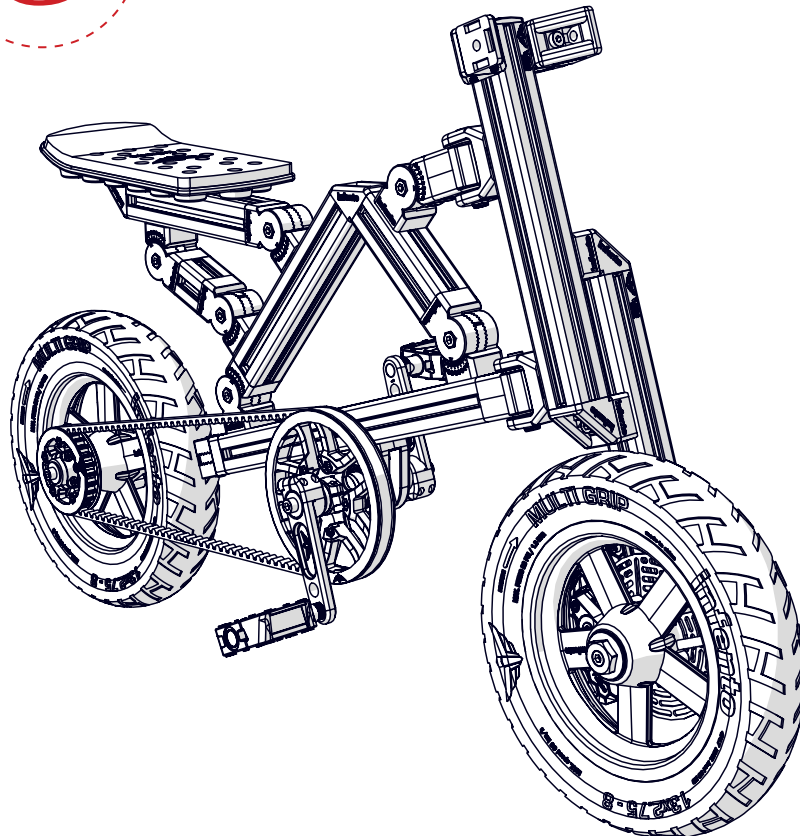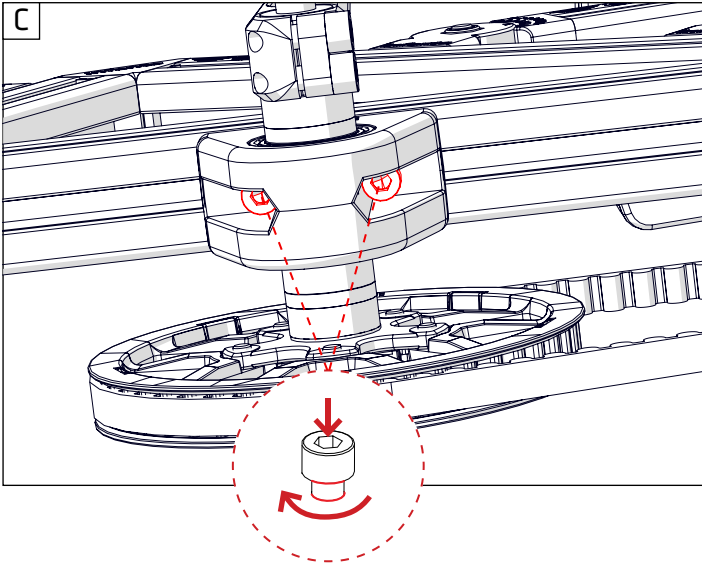



53


ride **BIKER**

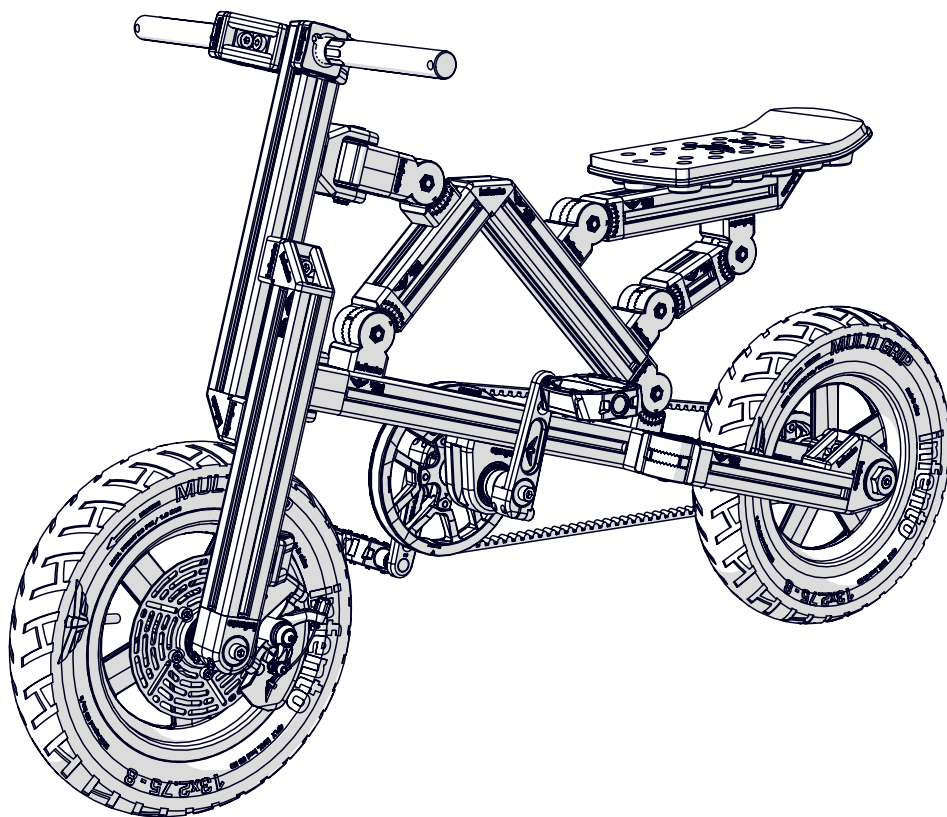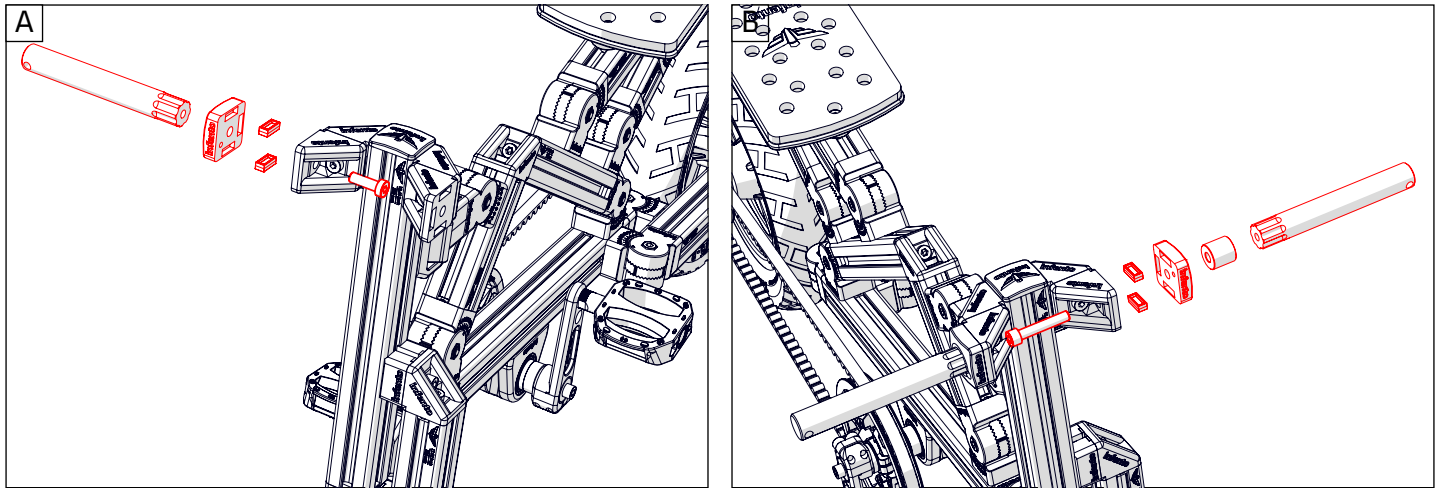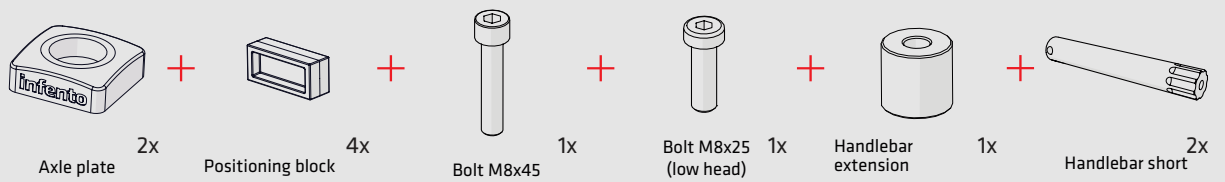






54

ride **BIKER**




1x
Brake lever left

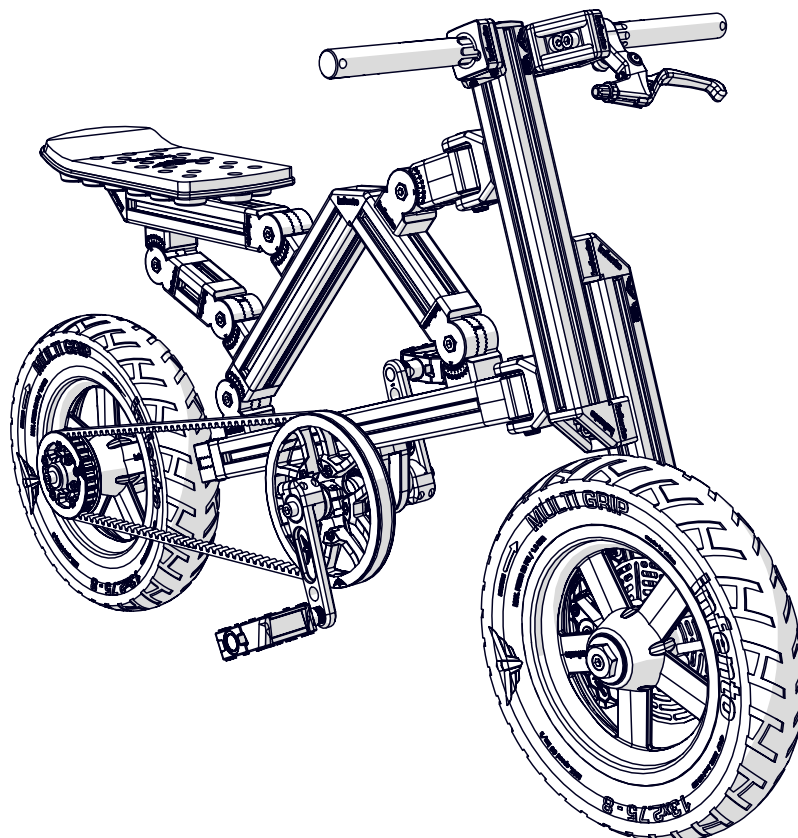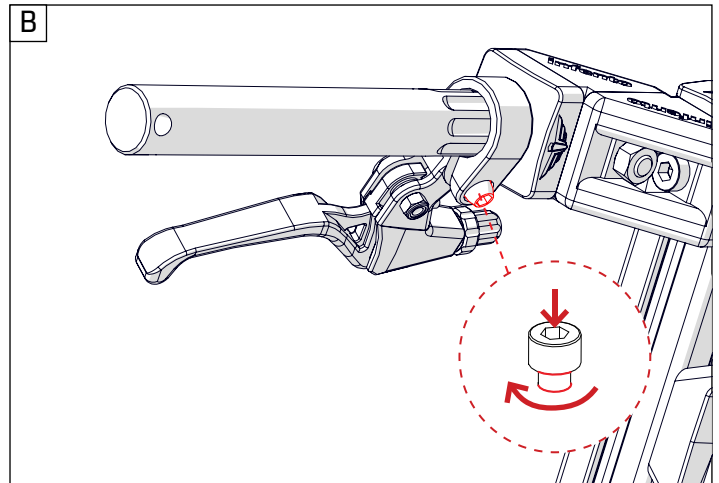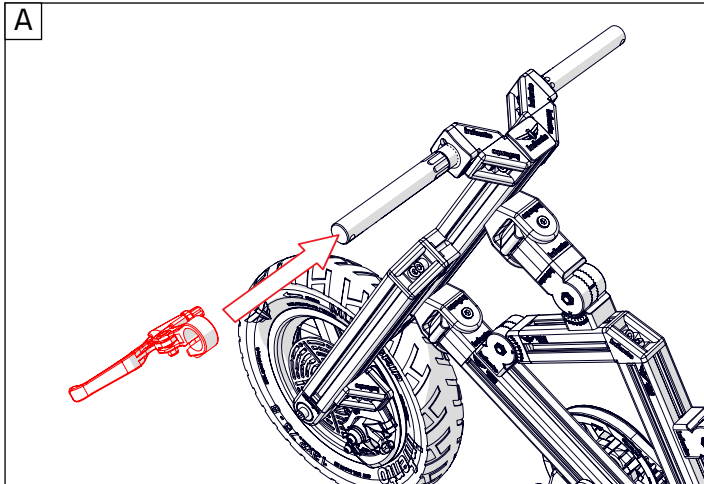








55

ride **BIKER**




Handgrip 2x

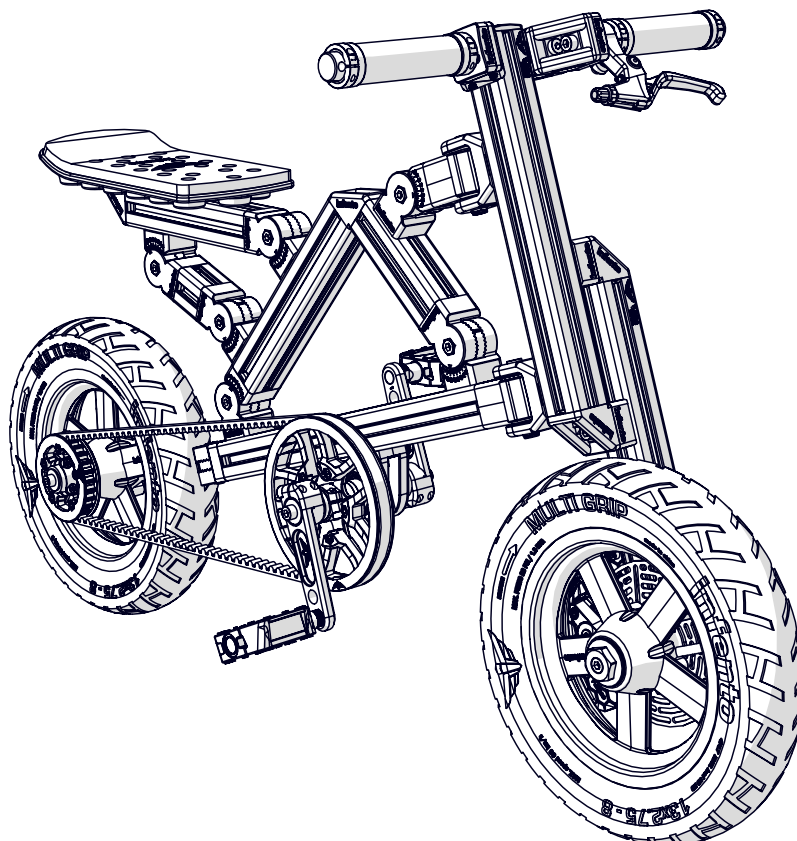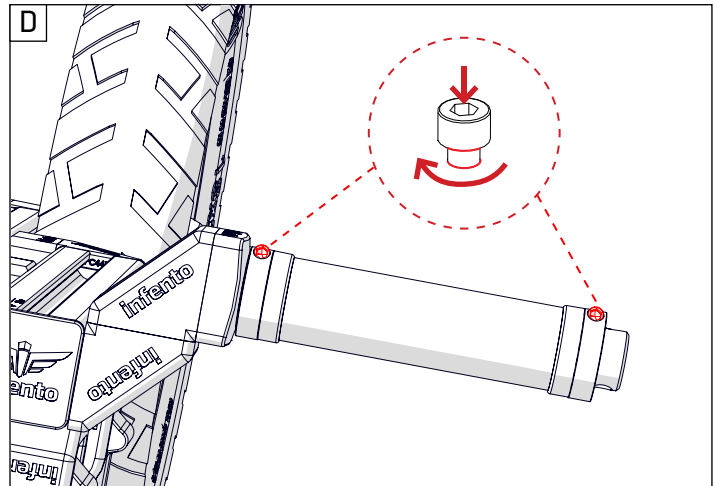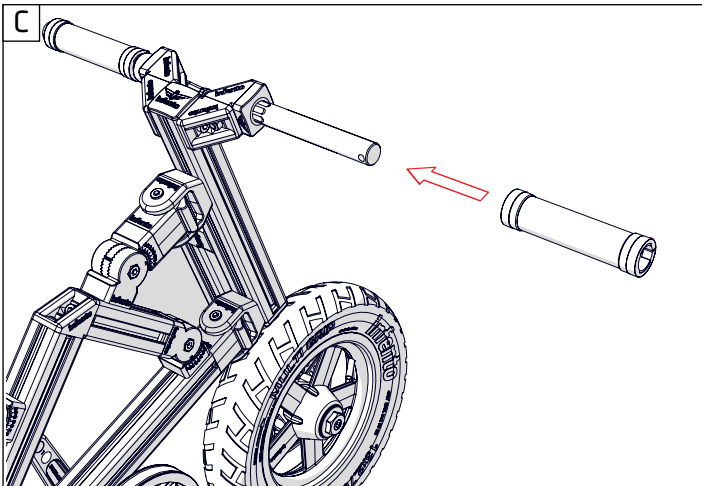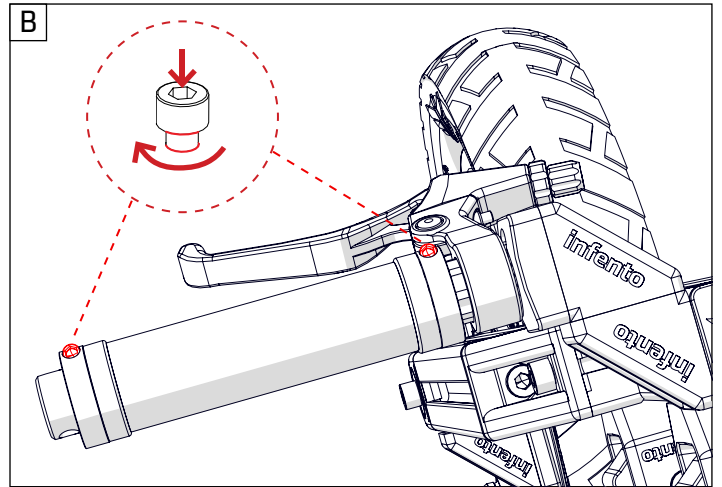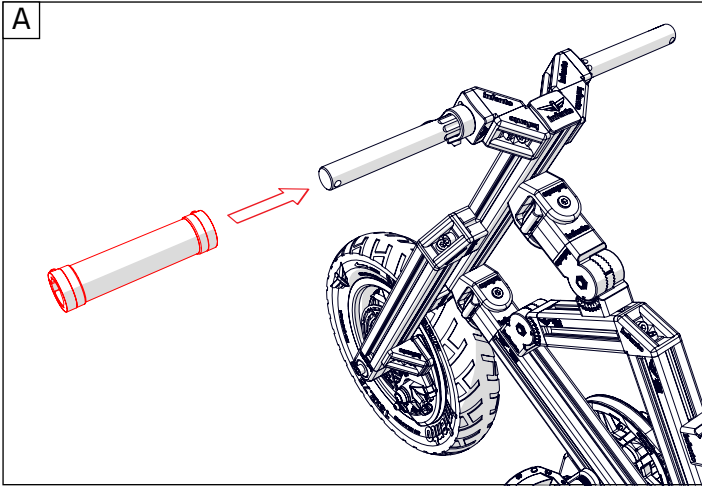









56

ride **BIKER**



Belt shield cap 46T 2x

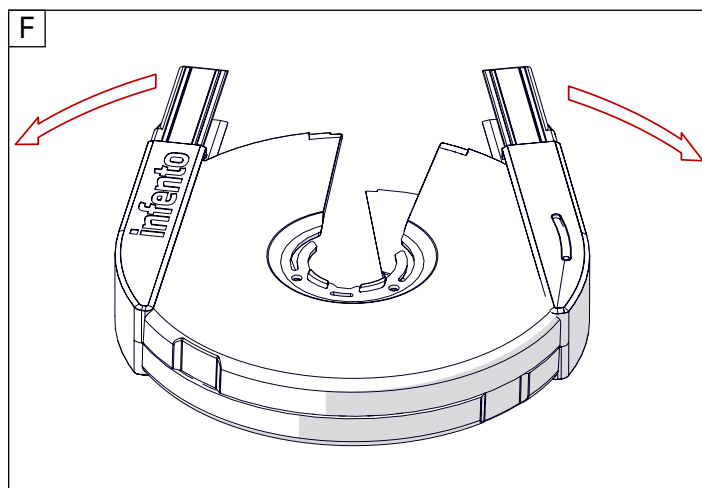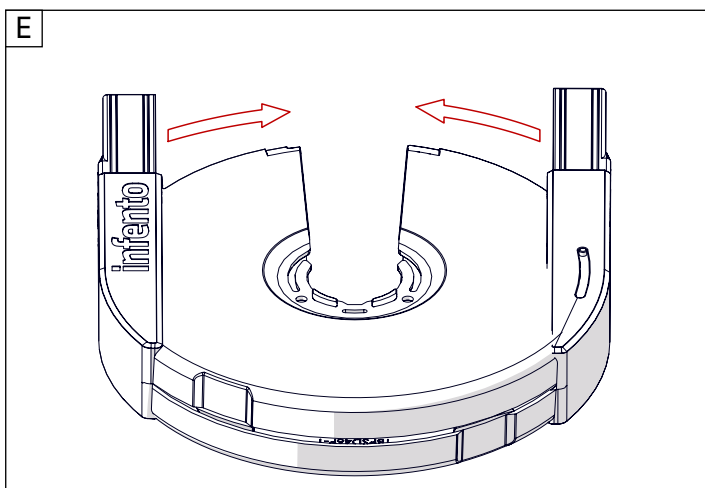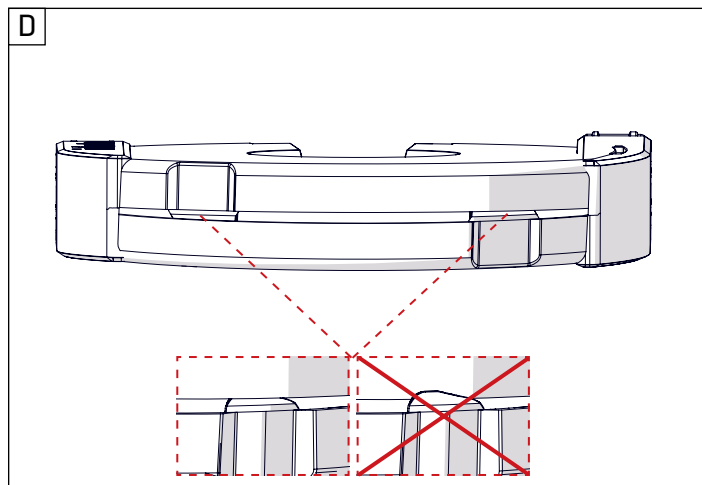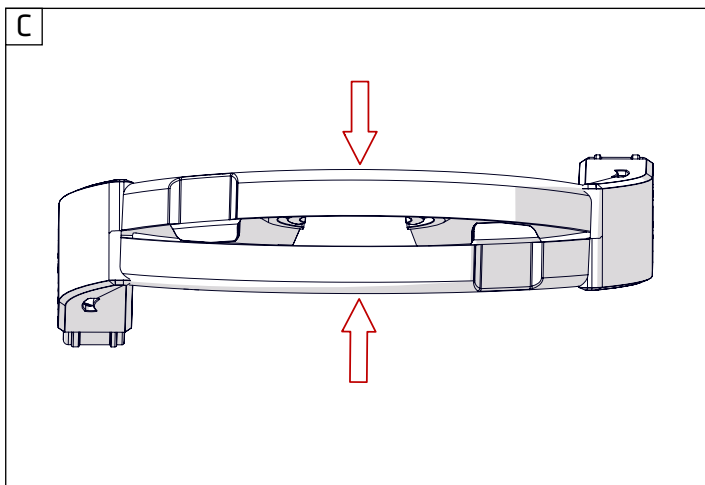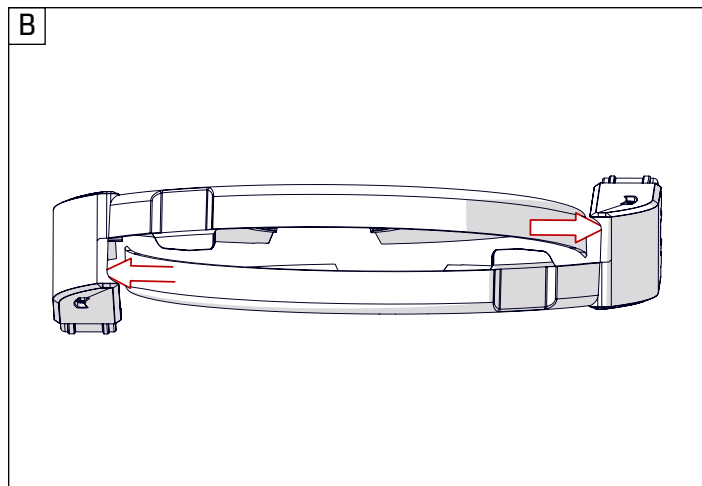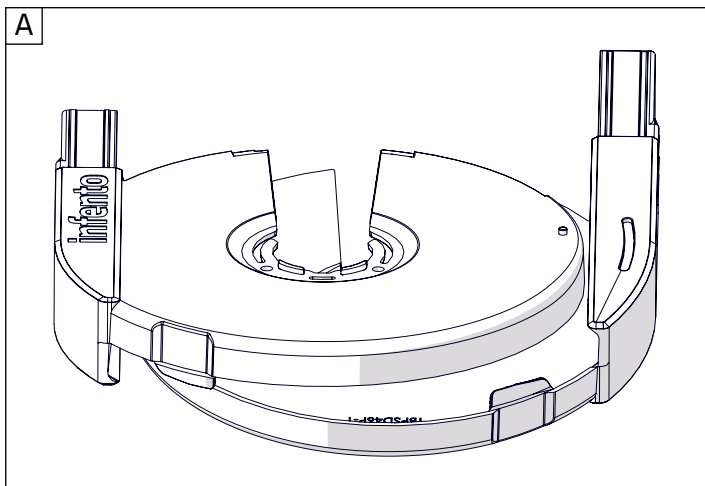







57

ride **BIKER**




Belt shield 2x
nylon ring

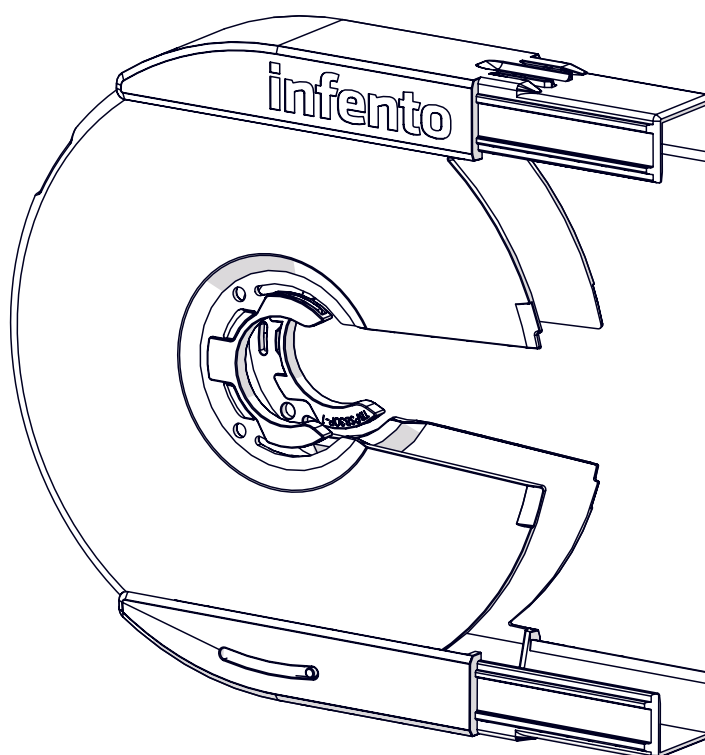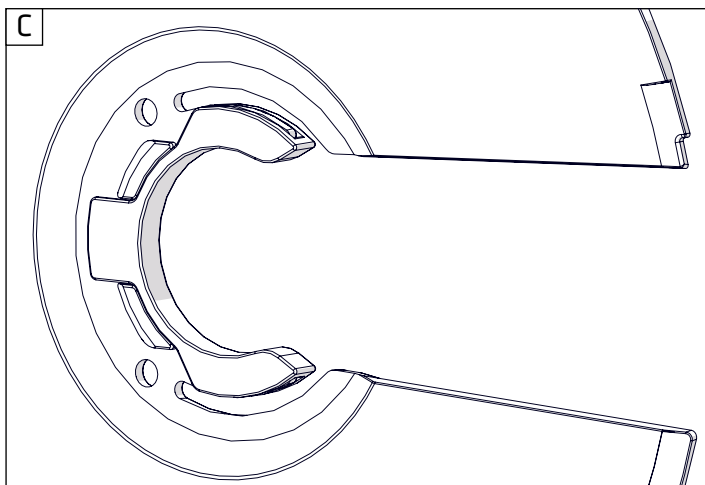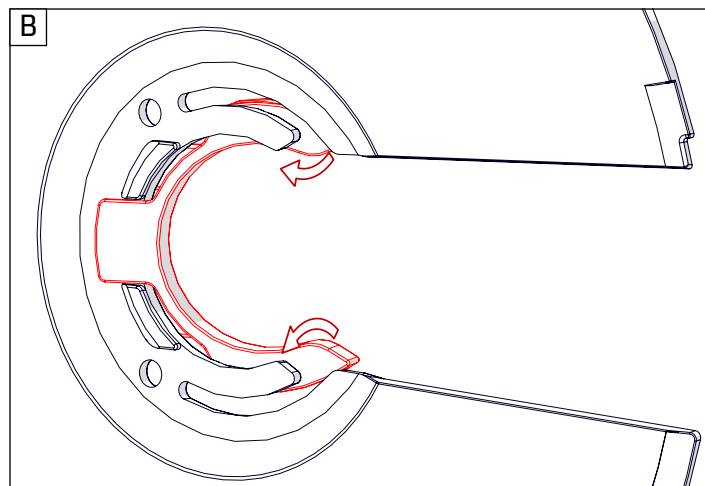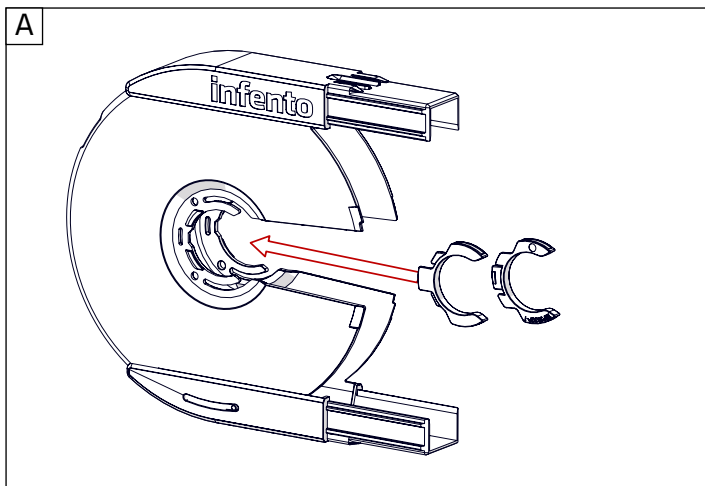





58

ride *BIKER*



Belt shield
centre 46T




2x

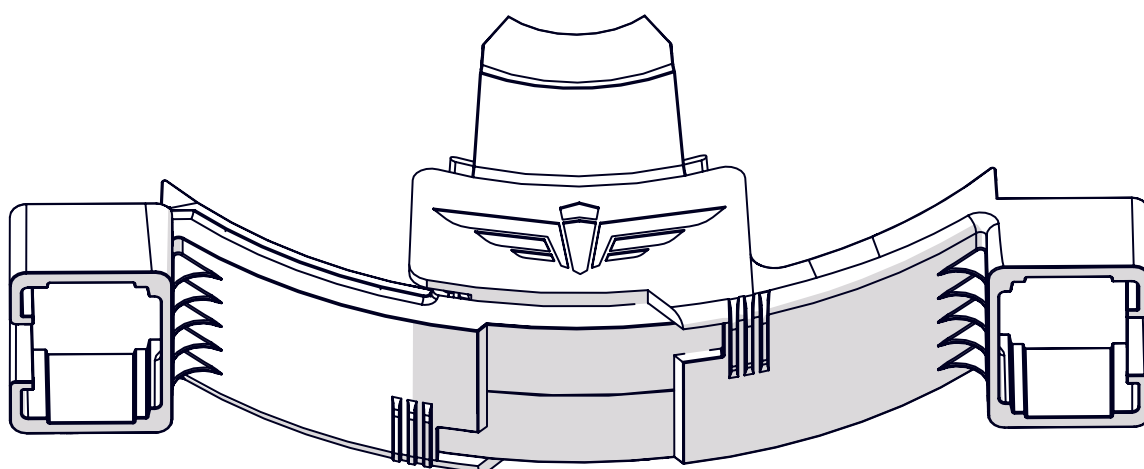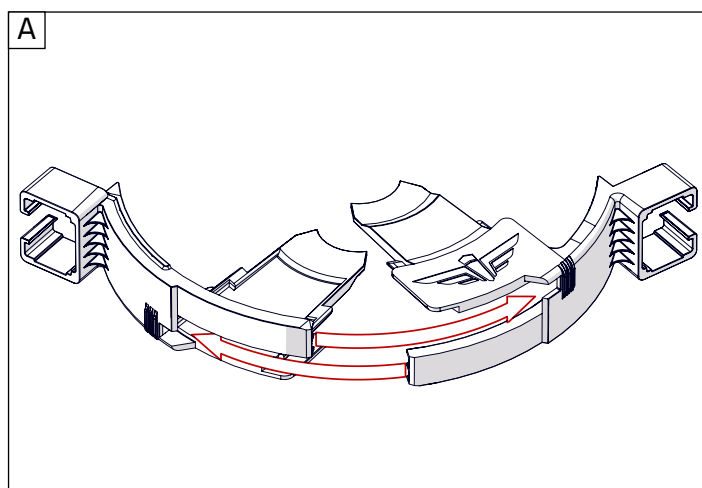



59




ride **BIKER**

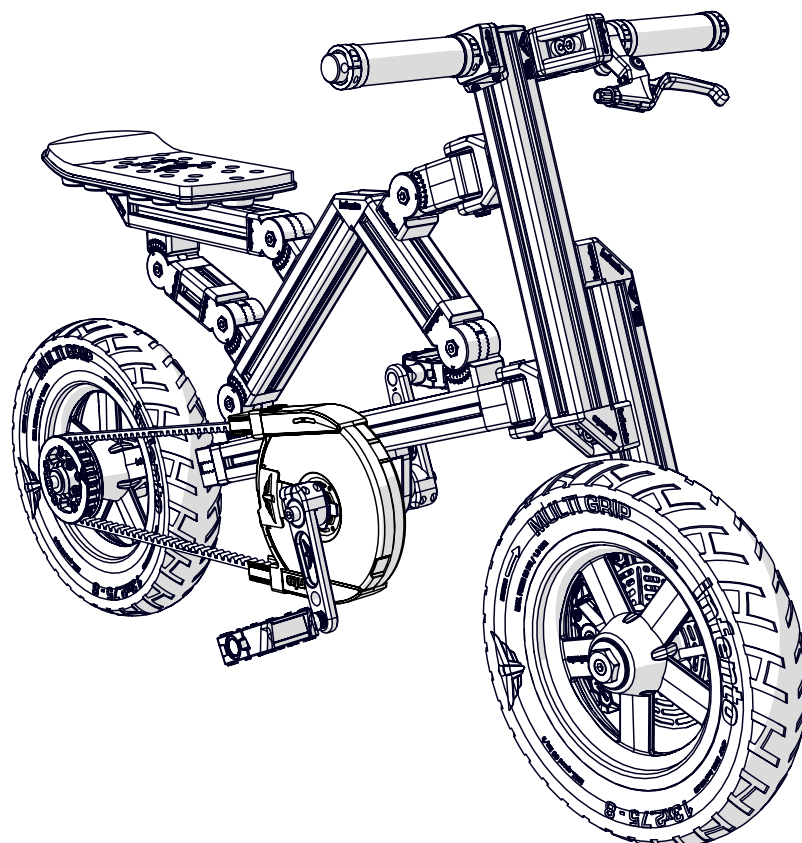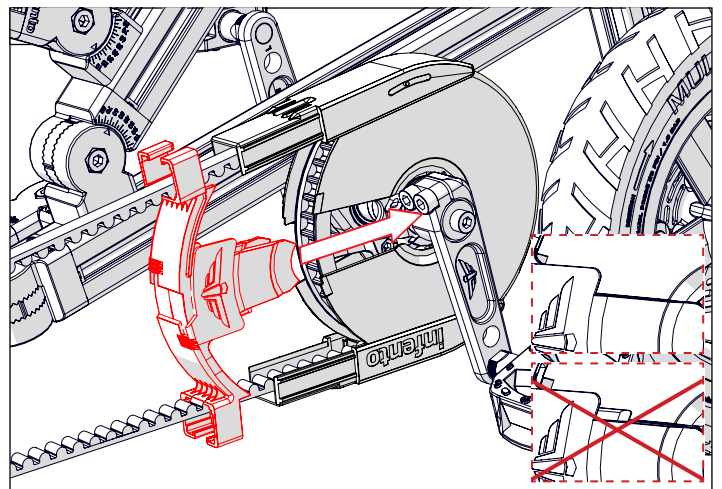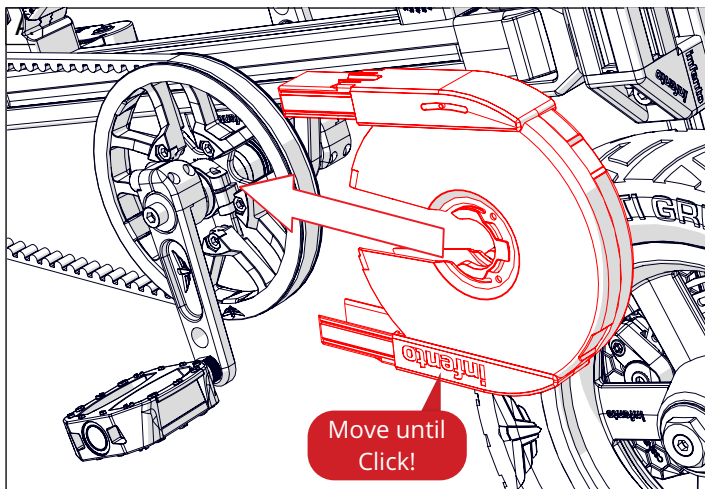



60





ride **BIKER**

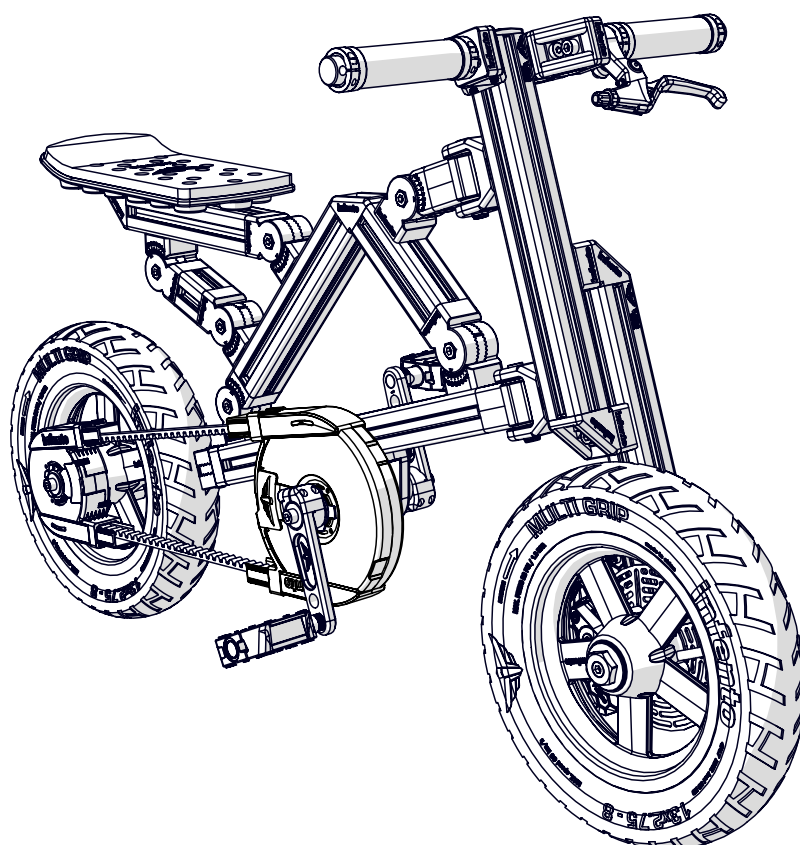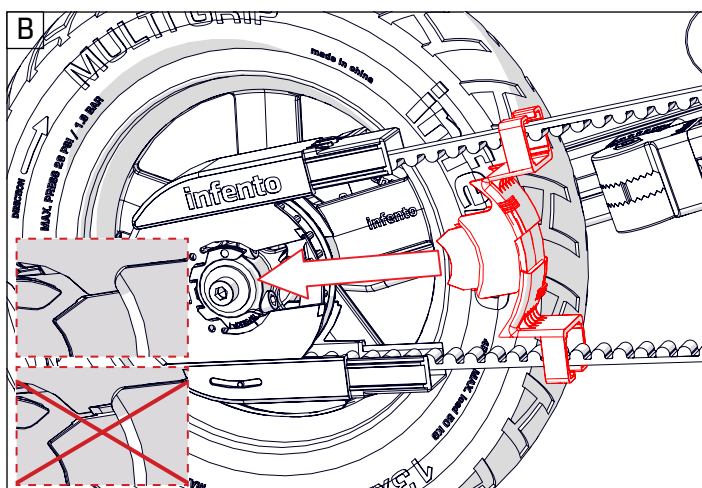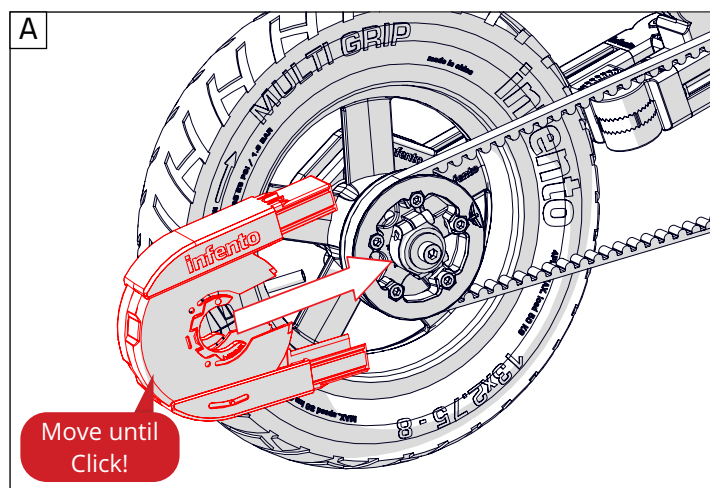



61

ride **BIKER**

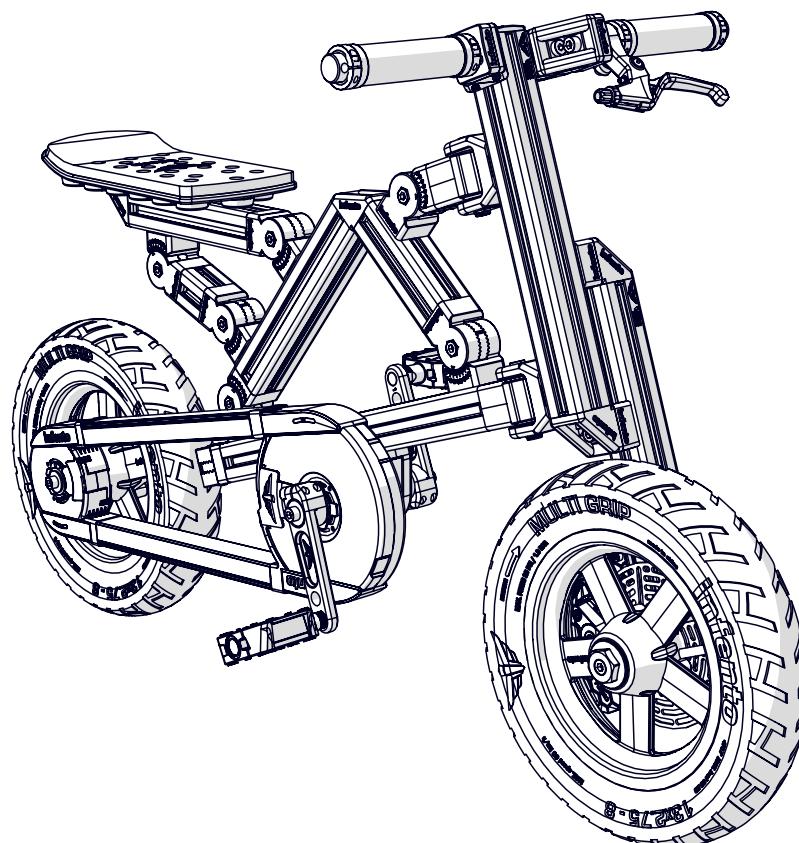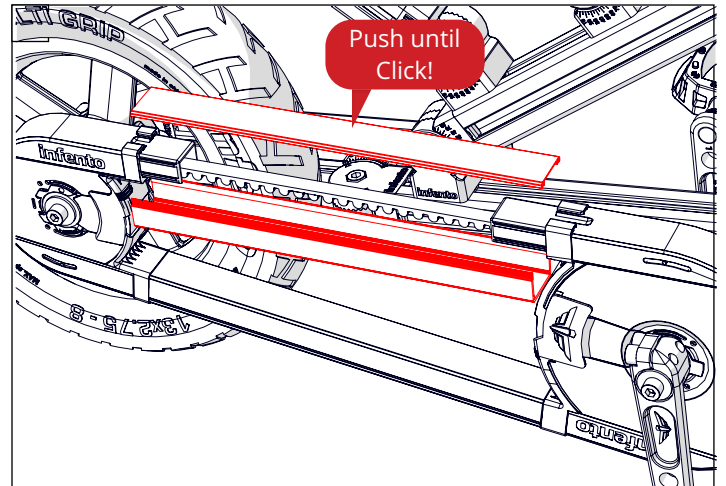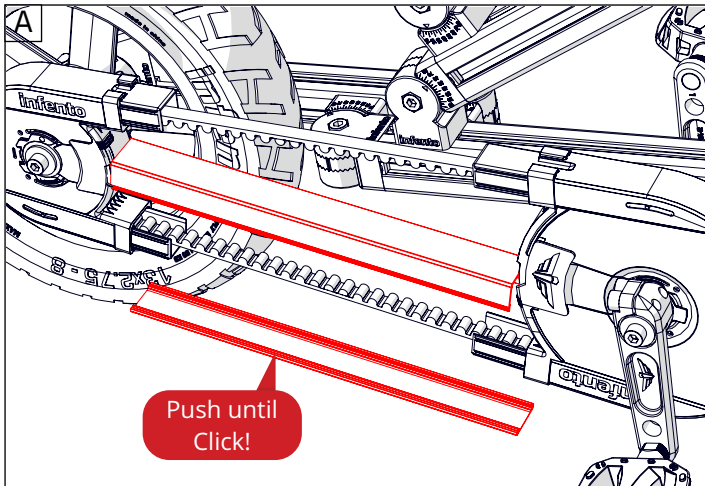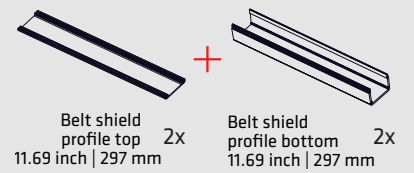







62

ride **BIKER**

infento

1x
Word mark

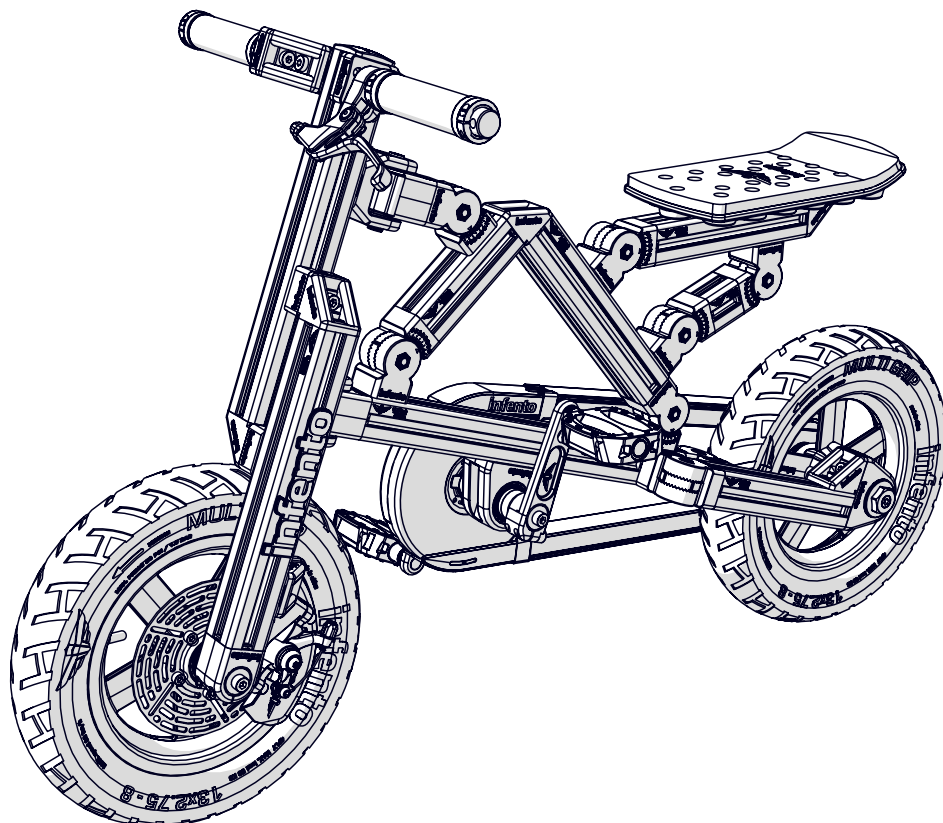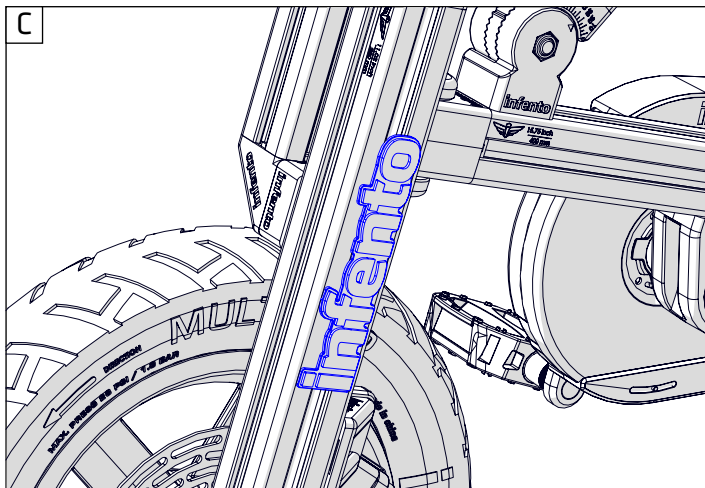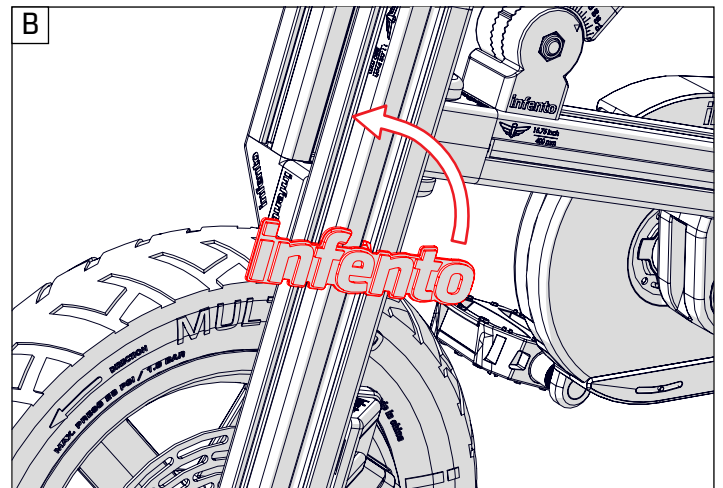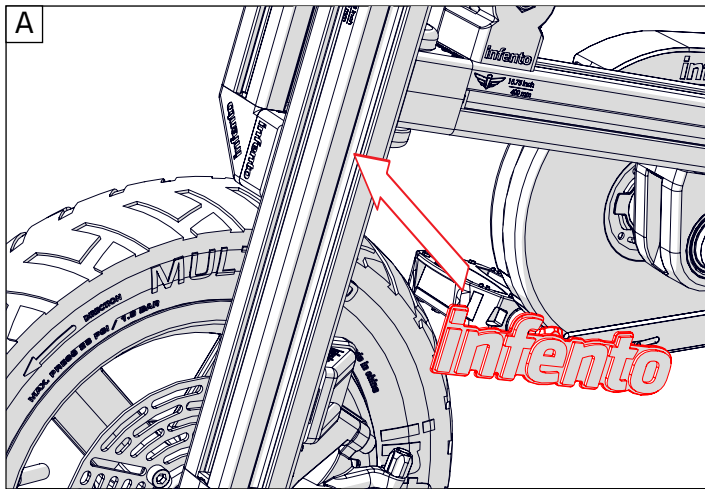




63

ride **BIKER**




Brake cable 1x
27.56 in | 700 mm


A

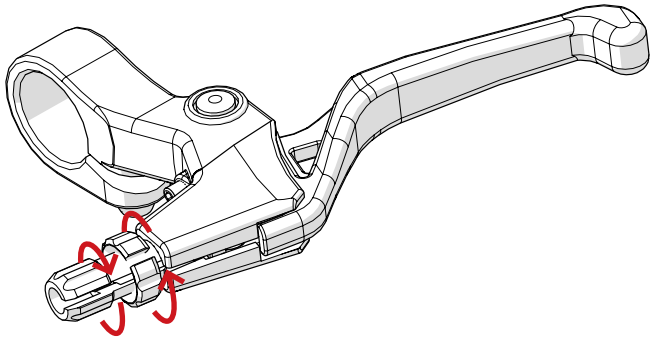



B

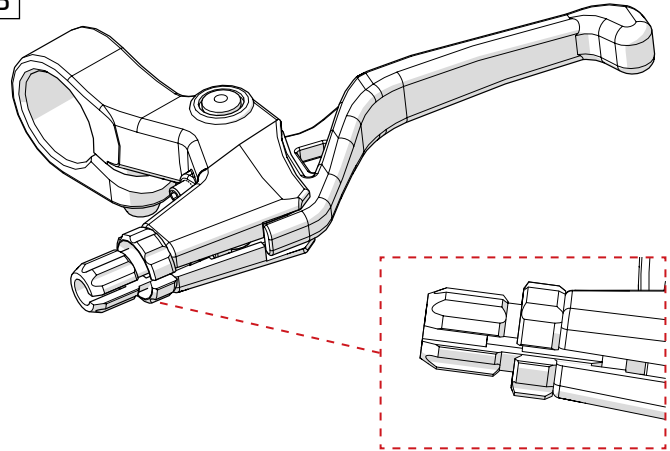

C

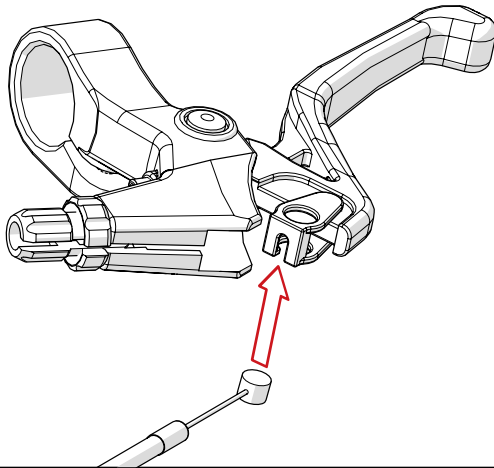




D

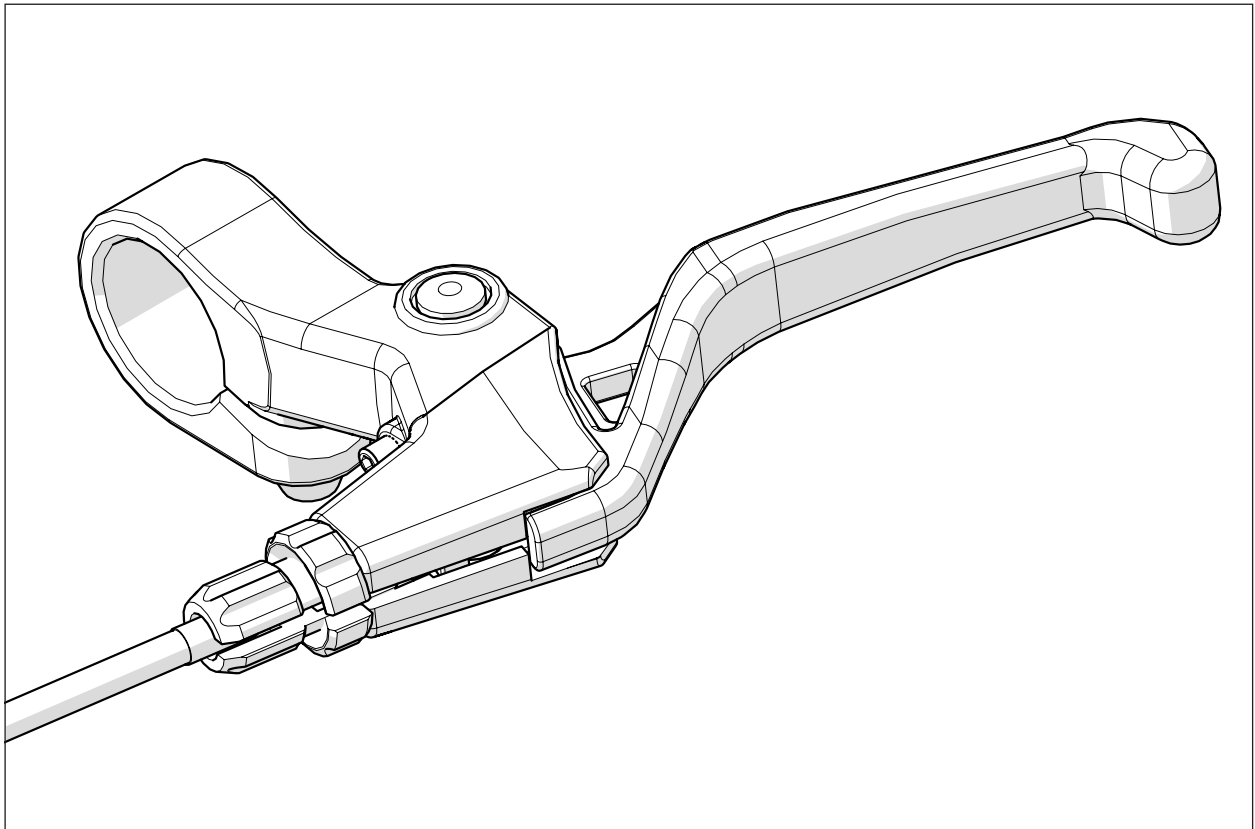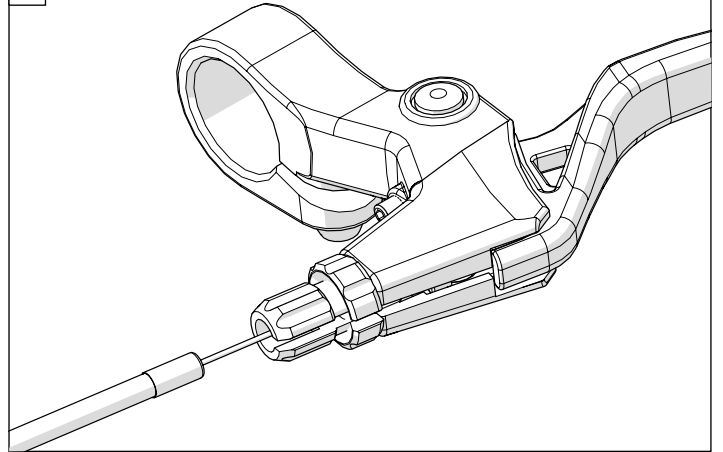



64






ride **BIKER**

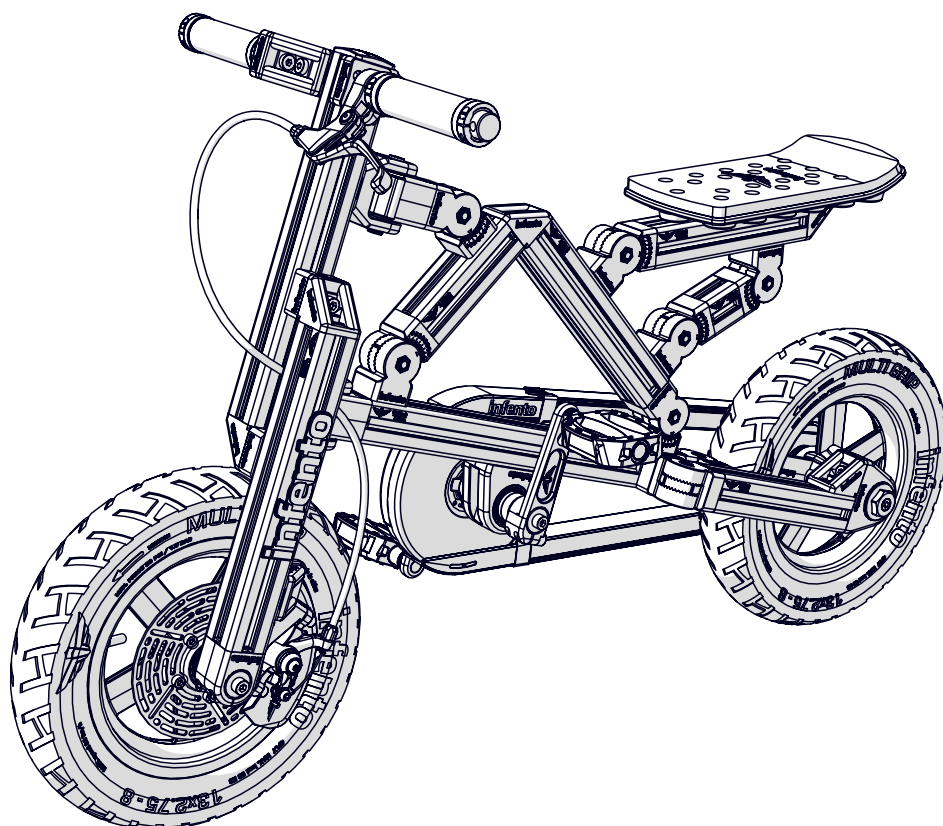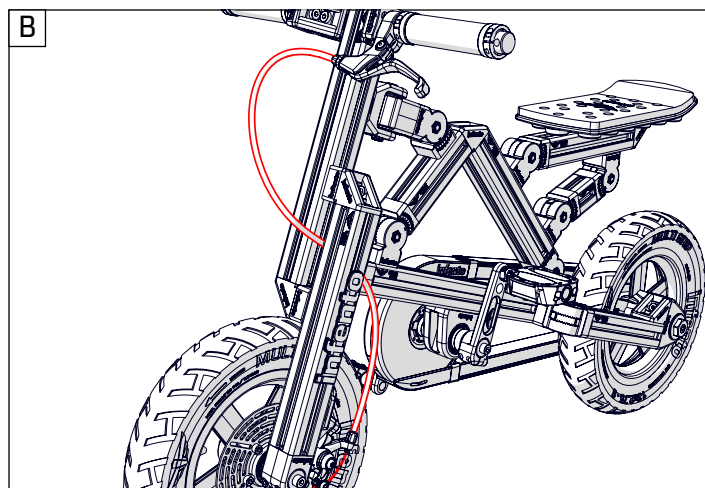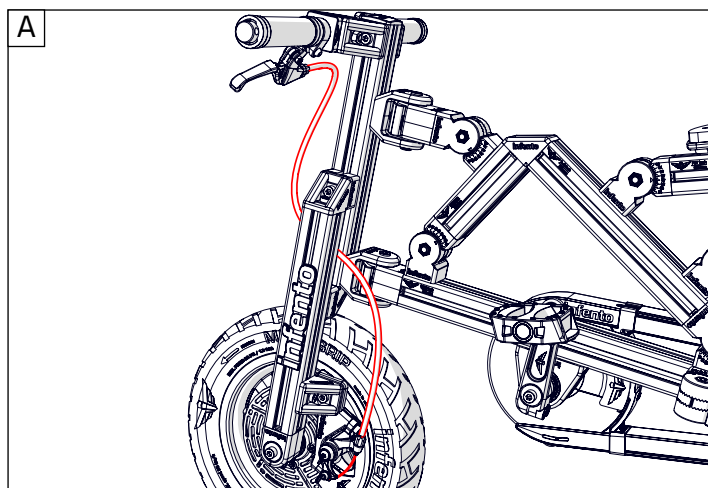



65

ride **BIKER**

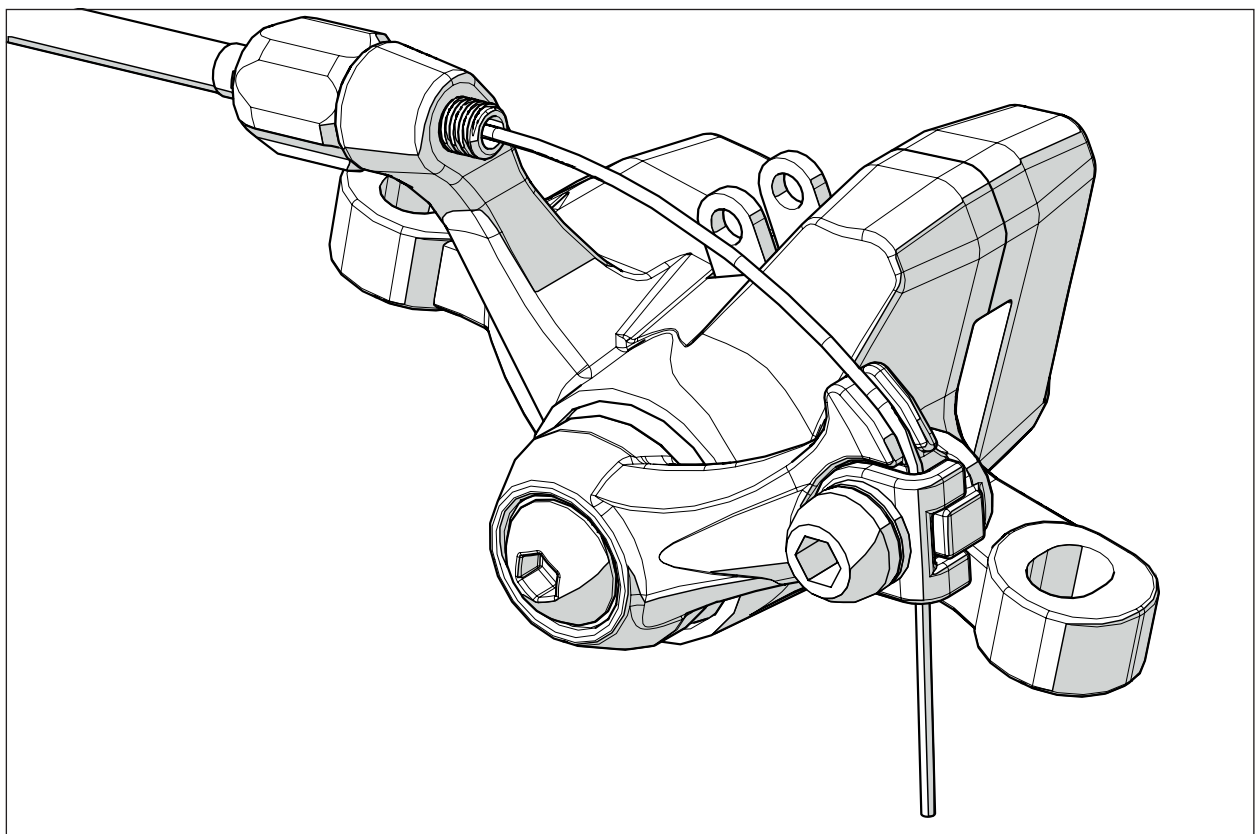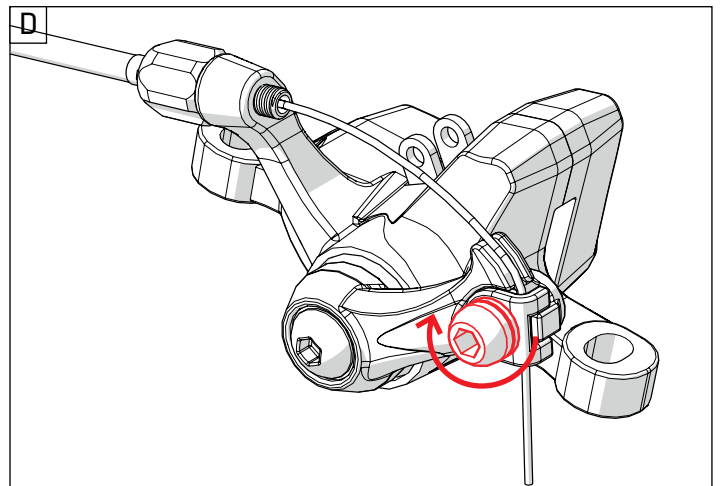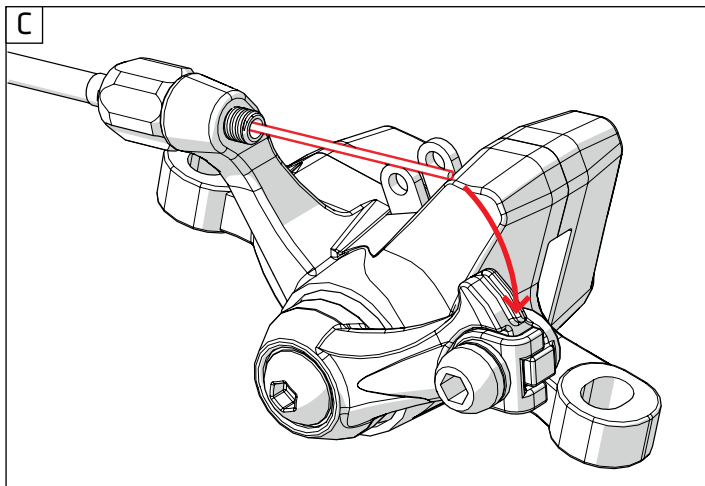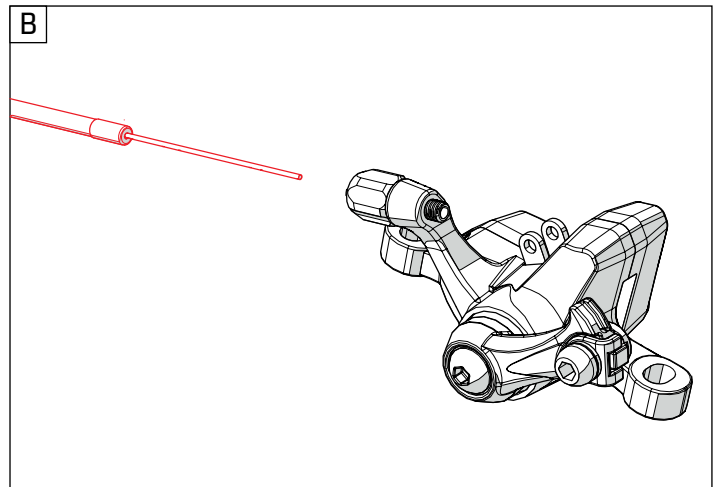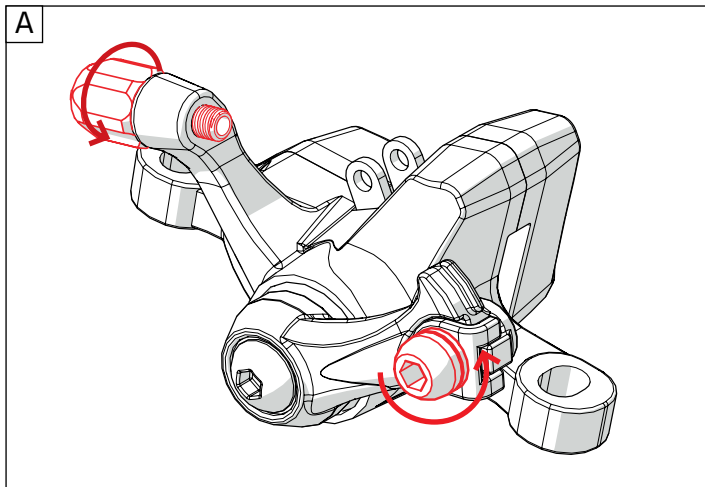

BIKER^{G3}



THANK YOU FOR READING ME!